

Product information

- Indoor use only
- Dimmable
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 48.8W
Rated input: 220 –240V, 50Hz
IP rating: 20
Weight: 4.4kg
Lumen output: 2152
Colour temperature: Warm white (3000K)
This product contains a light source of energy efficiency class F
For further information please visit: www.lighting-info.co.uk/104535



Non-replaceable light source




Replaceable control gear by a professional

The light source in this product is non-replaceable due to the risk of heat dissipation not being able to be maintained.

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China




20/04/2023

Please retain these instructions for future reference.



ASCEND 12 LIGHT INTEGRATED LED PENDANT USER GUIDE

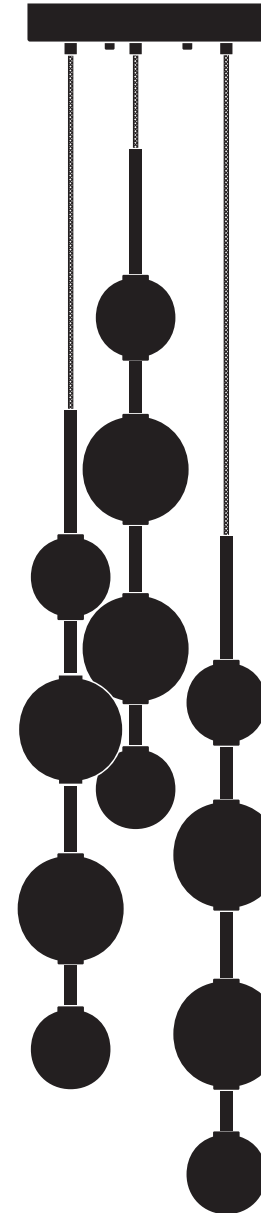

Product Code:
70150710




Getting started


Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

Parts list

Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 3
Screws		x 3



Note:


During transit, the cables can become kinked. It may be necessary to straighten the cables to allow the lights to hang level. Manipulate the kinked cables between thumb and fingers to straighten.

Product assembly

Step 1

Note: This product is fragile. Handle with care!

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

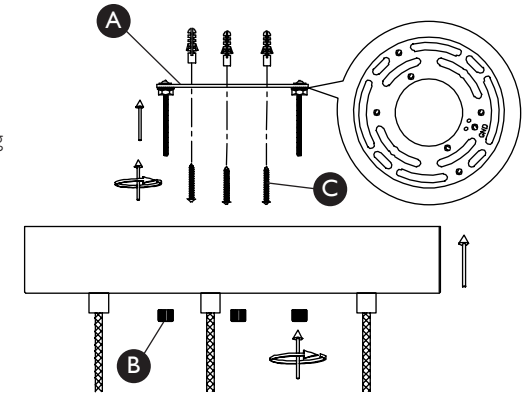

Step 2

Remove the fixing bracket (A) from the ceiling cover by removing the three finials (B). Attach to the ceiling using the screws provided (C).

Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.


Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Check that: You have correctly identified the house wires. The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

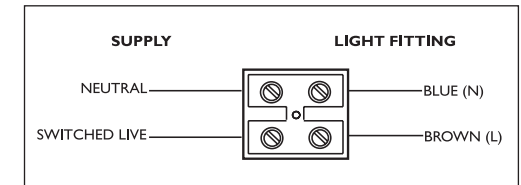

Step 4

Re attach the product to the fixing bracket using the three finials removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 5

Attach the top stems (D) by screwing onto the product in a clockwise direction. Take care not to trap the cable or cross the threads. Be careful not to let the glass lights collide as damage could occur.

Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

