

Product information

- Indoor use only
- Non-dimmable
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth

Aftercare and troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.


Specification

Recommended bulb: E27 LED classic bulb
Rated input: 220-240V, 50Hz
Max power: 1 x 10W LED
Bulb not included
IP rating: 20
Weight: 0.72kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China



Please retain these instructions for future reference



BALANCE CEILING PENDANT USER GUIDE

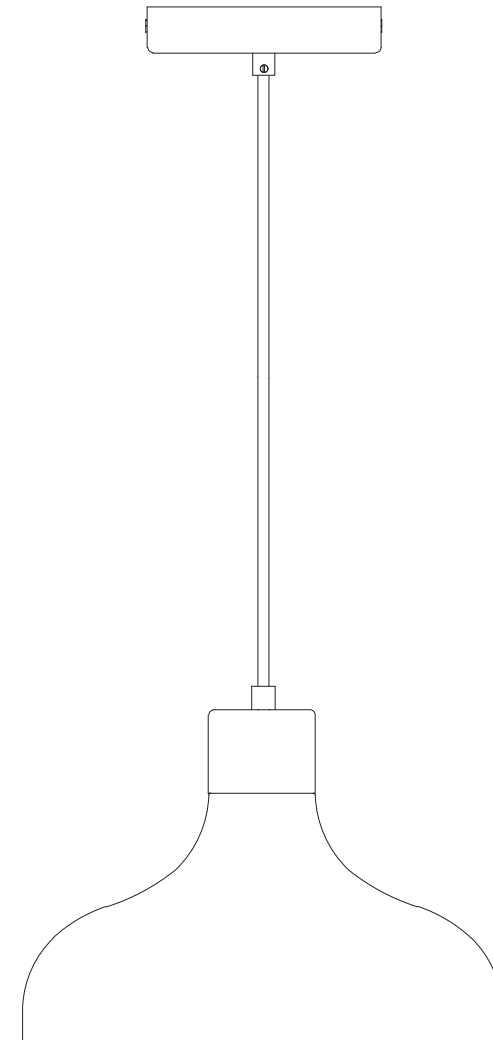

Product code
70140834
70140835

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly. Please read the instructions carefully before use.

Warnings

To prevent electric shock, switch off at the mains supply before installing or maintaining this fitting. Ensure another person cannot restore the electricity supply without your knowledge.

If you are in any doubt, please consult a qualified electrician. Always use the recommended bulb type and rated power. Never exceed the rated power stated.

The flexible cable on this luminaire, if damaged, shall only be replaced by the manufacturer or his service agent or a similar qualified person. It is the installer's responsibility to ensure that the fixings and plugs used are suitable for the surface you are fixing your product on.

Caution! The bulb and surrounding parts can become hot during use.







Do not cover. Keep away from curtains, bedding etc.

Always route mains cable so it does not present a hazard (entrapment, tripping etc.); Ensure that there are no twists or snags in the cable.


Plug into the mains supply; switch on using the inline cord switch provided.

When moving this lamp, always carry by holding the stand part (and not the glass).

Parts List


	Description	Image	Quantity
A	Canopy + Cord + Socket		1 PC
B	Metal Shade		1 PC
C	Socket Ring		1 PC
D	Scews		2 PCS
E	Bracket		1 PC
F	Socket Tool		1 PC

Product assembly



Carefully unpack the carton, making sure all parts are included before assembly. Place lamp parts on flat surface.


1. Unscrew the cord grip and adjust the cable to preferred length. Then tighten the plastic screw.




2. Mark screw position on the ceiling with screw anchor.

Note: Make sure there is a joist, or other suitable means of support for the weight of the fitting at the intended fixture position. Ensure there are no hidden wires, water pipes, or gas pipes before drilling holes. Drill the mounting hole with a 6mm drill bit, the fixed bracket (F) needs to penetrate joist by at least 25mm. Then secure the bracket (F) to wall with screws.


Note: Screws are purchased separately. They are not included in the packaging.



3. Ensure the house electricity supply is switched off at the fuse board. Make electrical connections on terminal block as shown. Connect supply live, (normally brown or red color) to fitting live, (marked "L") on the terminal block. Then connect supply neutral (normally blue or black color) to fitting neutral (marked "N") on the terminal block. Ensure electrical connections are tight and no loose strands of wire are left out of the connector block. Place terminal block into the block protection box, and screw in the position.



4. Place canopy (C) over bracket (F) with screws (E). Then tighten screws (E) with a Phillips screwdriver (not included) to make sure the fixture is secured.



6. Place metal shade (B) on to socket (A), hold in place, then put the socket ring (C) inside of the socket tool (F) to then screw on the socket (A).