

# CORINA NON ELEC PENDANT

IL1887

Thank you for buying this non-electrical pendant.  
Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product.

## YOU MAY REQUIRE ASSISTANCE TO INSTALL THIS ITEM

Make sure the electricity is switched off at the fuse board before removing bulb.

1. Ensure the lamp holder is in good condition and is not damaged before proceeding.
2. Allow the old bulb to cool down before handling. Remove existing light bulb from lamp holder.
3. Remove lower half of lamp holder and make sure lamp holder is not damaged.

4. Pass the upper section of the lampholder connected to the supply cord through the top hole in the glass pendant.


5. **If this item is being fitted to a B22 batten it is important that the metal ring and metal reducer are fitted. The metal reducer must sit under the metal ring.** Fit the metal ring complete with metal reducer to the lampholder and secure in place with the skirt of the lampholder.

6. Carefully lower the glass so that it sits onto the metal ring secured to the lampholder.

7. Adjust the glass so that it sits over the lampholder straight and the lampholder sits central.

8. Fit the bulb, type and wattage as indicated on the product.

9. Switch the electricity back on at the fuse board. You may now switch on the light. Your non-electric shade is now ready for use.

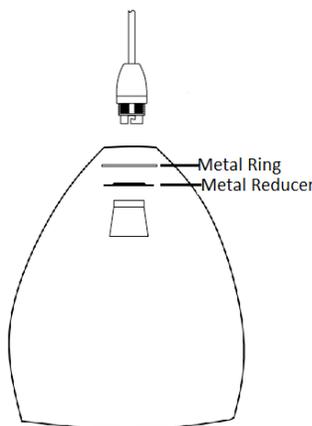

Please retain this information leaflet for future reference

### GENERAL INFORMATION

This fitting is designed for internal use only

Do not use polish or abrasive cleaner – just a soft dry cloth.

# CORINA NON ELEC PENDANT

IL1887

Thank you for buying this non-electrical pendant.  
Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product.

## YOU MAY REQUIRE ASSISTANCE TO INSTALL THIS ITEM

Make sure the electricity is switched off at the fuse board before removing bulb.

1. Ensure the lamp holder is in good condition and is not damaged before proceeding.
2. Allow the old bulb to cool down before handling. Remove existing light bulb from lamp holder.
3. Remove lower half of lamp holder and make sure lamp holder is not damaged.

4. Pass the upper section of the lampholder connected to the supply cord through the top hole in the glass pendant.


5. **If this item is being fitted to a B22 batten it is important that the metal ring and metal reducer are fitted. The metal reducer must sit under the metal ring.** Fit the metal ring complete with metal reducer to the lampholder and secure in place with the skirt of the lampholder.

6. Carefully lower the glass so that it sits onto the metal ring secured to the lampholder.

7. Adjust the glass so that it sits over the lampholder straight and the lampholder sits central.

8. Fit the bulb, type and wattage as indicated on the product.

9. Switch the electricity back on at the fuse board. You may now switch on the light. Your non-electric shade is now ready for use.

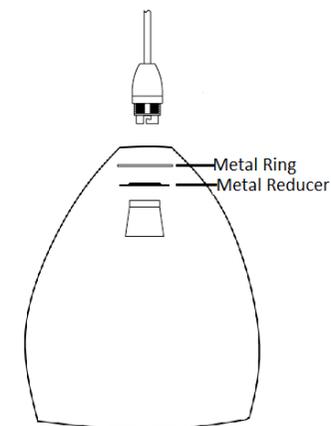

Please retain this information leaflet for future reference

### GENERAL INFORMATION

This fitting is designed for internal use only

Do not use polish or abrasive cleaner – just a soft dry cloth.