


Product information	<ul style="list-style-type: none"> • Indoor use only • Non-dimmable • Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands • Clean the fitting with a soft dry cloth
----------------------------	--

Aftercare and troubleshooting	<p>You've switched on the light, but it's not working:</p> <ol style="list-style-type: none"> 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order <p>If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.</p>
--------------------------------------	--

Specification	<p>Recommended bulb: E27 LED bulb</p> <p>Rated input: 220 –240V, 50Hz</p> <p>Max power: 1 x 10W LED</p> <p>Bulb not included</p> <p>IP rating: 20</p> <p>Weight: 0,53 kg</p>
----------------------	--

5-year guarantee	<p>At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.</p>
-------------------------	--

Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.</p>
------------------	---

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China



Please retain these instructions for future reference.



SERENITY WALL LIGHT USER GUIDE



Product code:
70253002
70253003

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

To prevent electric shock, switch off at the mains supply before installing or maintaining this fitting. Ensure another person cannot restore the electricity supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

Always use the recommended bulb type and rated power. Never exceed the rated power stated.

The flexible cable on this luminaire, if damaged, shall only be replaced by the manufacturer or his service agent or a similar qualified person.

It is the installer's responsibility to ensure that the fixings and plugs used are suitable for the surface you are fixing your product on.

Caution! The bulb and surrounding parts can become hot during use.








Do not cover. Keep away from curtains, bedding etc.

Always route mains cable so it does not present a hazard (entrapment, tripping etc.); Ensure that there are no twists or snags in the cable.

Plug into the mains supply; switch on using the inline cord switch provided.


When moving this lamp, always carry by holding the stand part (and not the glass).

Parts list

Description	Image	Quantity
A Canopy + Socket		1 PC
B Shade		1 PC
C Long Screws		2 PCS
D Plastic Bolts		2 PCS
E Short Screws		2 PCS
F Bracket		1 PC
G Socket Ring		1 PC


Product assembly

- 1

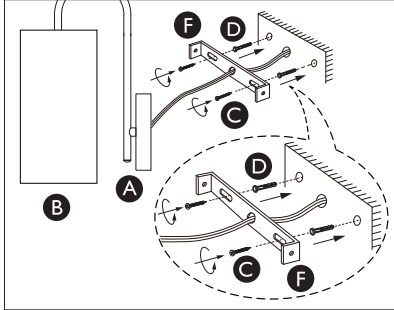


1. Secure bracket (F) to the wall with plastic bolts (D) and long screws (C).

NOTE: Requires a Phillips screwdriver to tighten the screws.
- 2

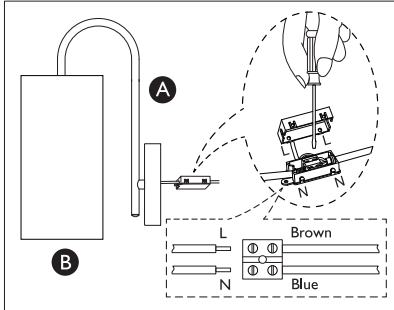


2. Make electrical connections on terminal block as shown. Connect supply live (normally brown or red color) to fitting live (marked "L") on the terminal block. Connect supply neutral (normally blue or black color) to fitting neutral (marked "N") on the terminal block. Ensure electrical connections are tight and no loose strands of wire are left out of the connector block. Place terminal block into canopy.

NOTE: Requires a slotted head screwdriver to tighten the wire.
- 3

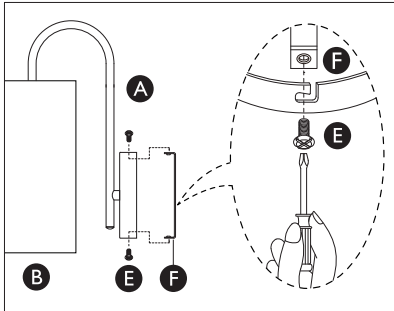

3. Place the canopy of the lamp body (A) over the bracket (F). Secure lamp body (A) to the bracket (F) by placing the short screws (E) into the holes on the side of lamp body (A) and tighten each screw with a screwdriver (not included).

NOTE: Requires a Phillips screwdriver to tighten the screws.
- 4

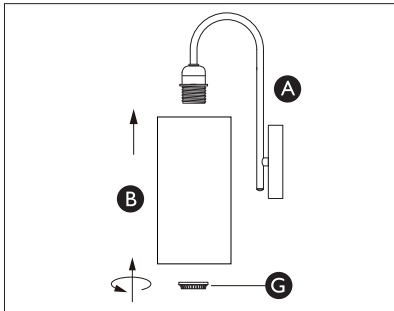

4. Socket ring (G) comes pre-assembled to the socket (A). Before placing the shade (B) onto the socket (A), please unscrew this socket ring (G). Then place shade (B) onto the socket (A) and screw on socket ring (G) clockwise on socket (A) until tight to secure the shade (B).