



Product information	<ul style="list-style-type: none"> <li>Indoor use only</li> <li>3 step dimmable - with a regular wall switch</li> <li>Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish</li> </ul>
---------------------	--

Aftercare and Troubleshooting	If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.
-------------------------------	---

Specification	Max power: 32W Rated input: 220 –240V, 50Hz IP rating: 20 Weight: 1.8kg Lumen output: 2100 Colour temperature: Warm white (3000K) This product contains a light source of energy efficiency class E For further information please visit: <a href="http://www.lighting-info.co.uk/108969">www.lighting-info.co.uk/108969</a>
---------------	---




Replaceable light source by a professional



Replaceable control gear by a professional

5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.
------------------	---

Recycling	This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit <a href="http://www.recycle-more.co.uk">www.recycle-more.co.uk</a> .
-----------	---

John Lewis plc  
SW1V 2QQ  
[johnlewis.com](http://johnlewis.com)

Made in China




09/04/2024

Please retain these instructions for future reference.



# PIVOT HOOP 6 LIGHT CEILING PENDANT USER GUIDE

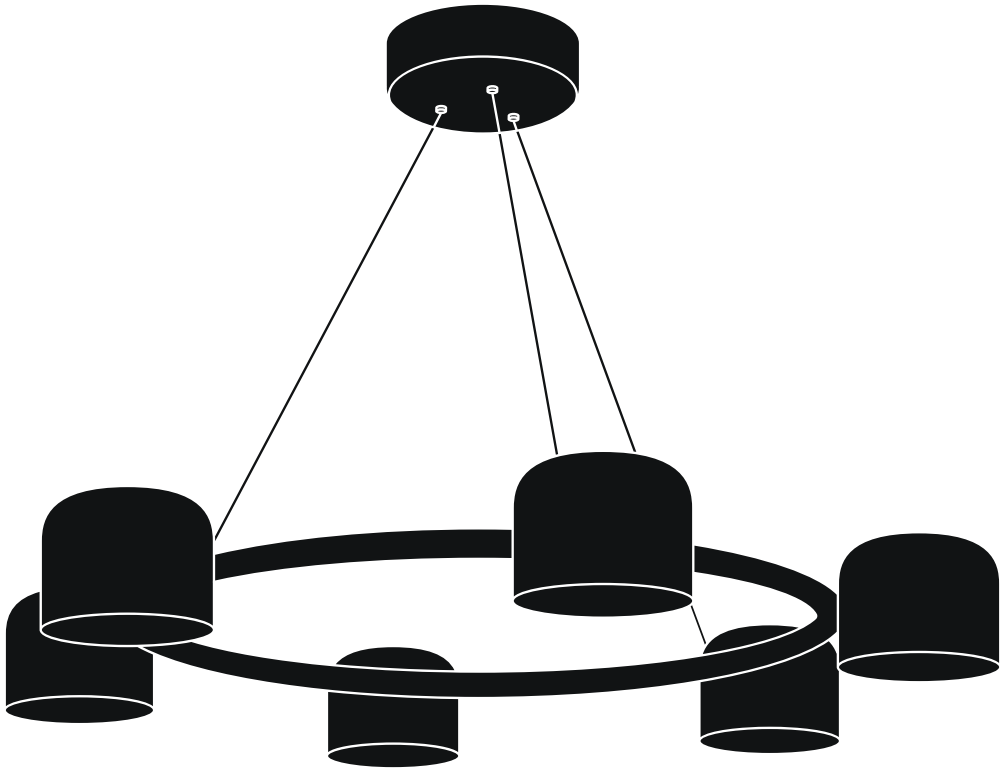

Product Code:  
70159502

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.




If replacing an existing fitting, make a note of the connections.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

This product is step dimmable with a regular wall switch. 3 levels of illumination can be selected by switching the wall switch on and off in quick succession. A dimmer switch is not required and the product is not compatible with a dimmer switch.

Parts list

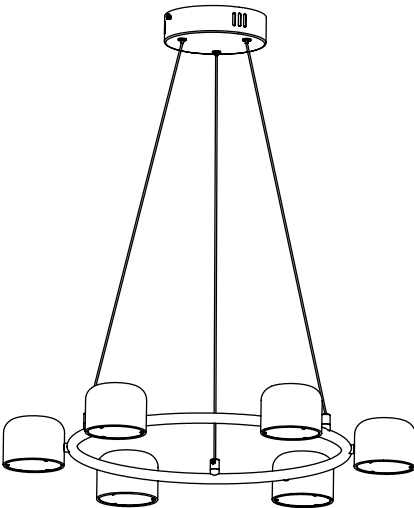Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 2
Screws		x 2

Product assembly


**Step 1**

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

**Step 2**

Remove the fixing bracket (A) from the product by unscrewing the two side screws (B) and retain for reuse. Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (C) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes.

Fix the bracket to the ceiling using supplied screws (D).

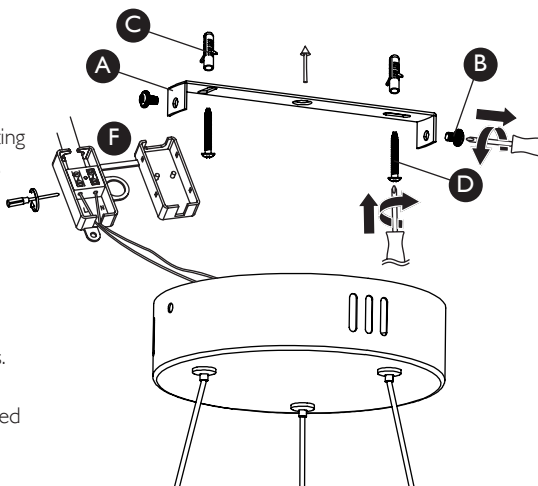

**Step 3**

The hanging height of this product can be adjusted. Push the steel cables through the grips (E) until the desired height is achieved. To release the grip and lengthen the cables, push up the buttons in the grips. Take care not to tangle the cables when unpacking and installing.

**Step 4**

Having identified the household wiring from your existing light fitting, connect to the connection block (F) inside the product in the following way. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block.

**Step 5**

Re-attach the product to the fixing bracket using the side screws removed in step 2 and tighten to secure. Take care not to trap any wiring.

**Step 6**

Your light is now ready for use.

**Operating the dimmer function**

This product has a unique feature allowing 3 different levels of illumination to be selected by using a regular on/off wall switch. Simply switch the wall switch off and on within 2 seconds to change the brightness from 100% to 50% to 12%.