

Product information


- Indoor use only
- Non-dimmable
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 28.1W
 Rated input: 220 –240V, 50Hz
 IP rating: 20
 Weight: 0.98kg
 Lumen output: 70132109: 1795 70132105: 1300
 Colour temperature: Warm white (3000K)
 This product contains a light source of energy efficiency class F
 For further information please visit: 79553



Replaceable light source by a professional



Replaceable control gear by a professional

5-year guarantee


At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.



OVALS SEMI FLUSH LIGHT USER GUIDE

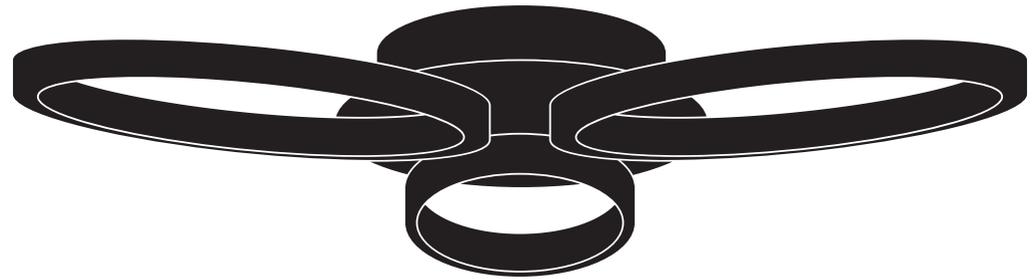

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China



21/08/2024

Please retain these instructions for future reference.



Product Code:
70132109
70132105


Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is suitable for indoor use only. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

Parts list

Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 2
Screws		x 2


Product assembly

Step 1

Refer to assembly diagrams right. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Remove the fixing bracket (A) from the ceiling cover by loosening side screws (B) and attach to the ceiling using the screws provided (C). Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

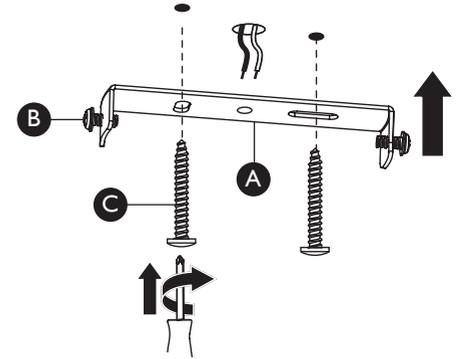

Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.


Check that:

You have correctly identified the house wires.

The connections are tight.


No loose strands have been left out of the connection block.

The lid is closed securely over the terminal block

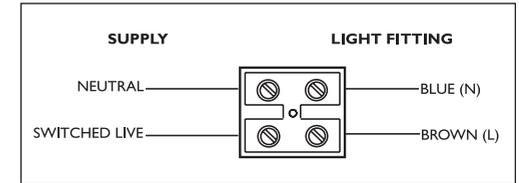

Step 4

Locate the "L" slots (D) around the small screws (B) on the fixing bracket (A). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

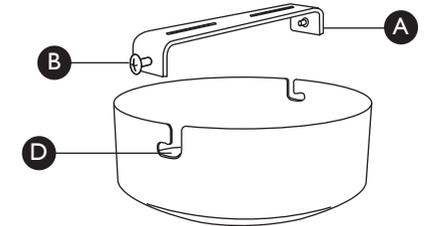

Step 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

