






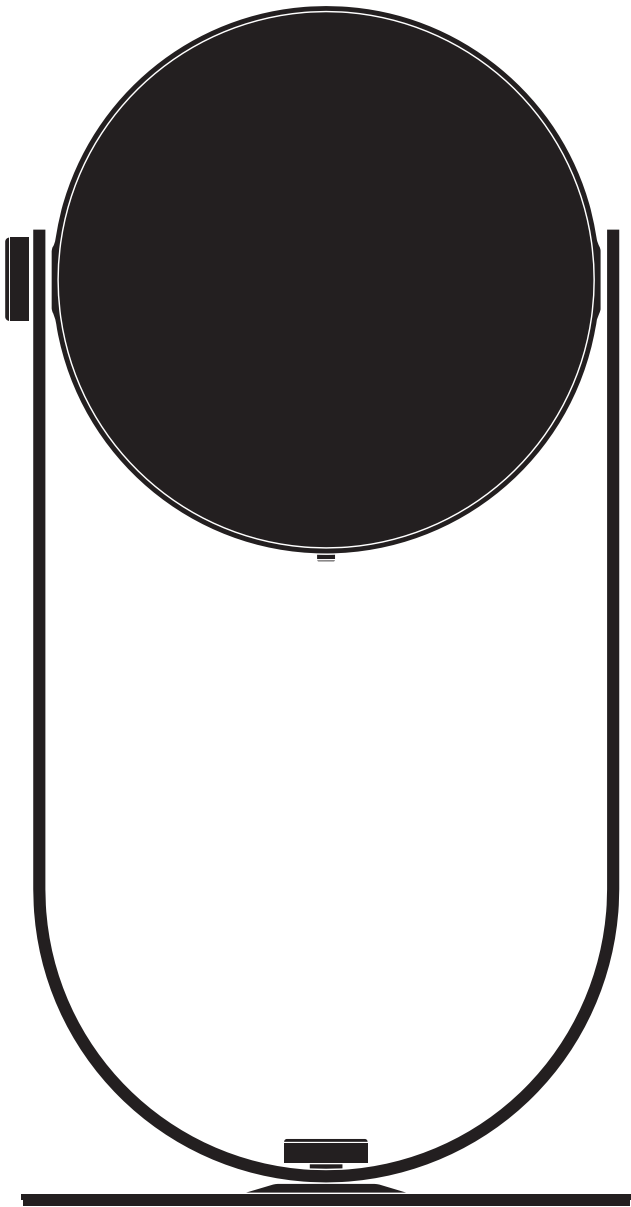
Product information	<ul style="list-style-type: none"> • Suitable for outdoor use • 3 step dimmable • Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish • This product contains Li-ion batteries
---------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Aftercare and Troubleshooting	<p>Please note the switch will use a small amount of current at all times and will slowly drain the battery even when the light is off.</p> <p>If you find the lamp turning itself off, even when the product is put on charge, it means the battery has been almost completely drained and needs initial charging before the lamp can be switched on again. Please refer to Step 4.</p> <p>If there are technical issues with this product that you are unable to resolve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.</p>
-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Specification	<p>Max power: 2.4W LED 3000K 210Lm INPUT Max.: 5W DC 5V 1A Solar Panel supply to Battery Max.: 330mA Battery: 3.7V 2400mAh IP rating: 44 Weight: 1.1kg Charging time (using USB cable): 3.5 hours when fully discharged Time in use: approx. 6 hours on full brightness Direct current </p> <div>    Non-replaceable light source </div>
---------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

2-year guarantee	<p>At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 2-year guarantee.</p>
------------------	------------------------------------------------------------------------------------------------------------------------------------

Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.</p>
-----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This product is battery powered and the internal battery is recharged via the solar panel or the supplied USB-A to USB-C cable.

This product should only be connected to equipment of Class II or class III. Batteries are only to be charged by persons over 8 years of age.

Only charge via input max. 5W DC 5V 1A SELV plug-in adapter (phone charger or similar USB outlet).

The light source of this luminaire is not replaceable and when the light reaches its end of life or if damage occurs the whole luminaire shall be scrapped.

Do not plug this product directly into the mains or by other means other than the supplied cable.

The battery must not be opened, destroyed or incinerated.

The battery in this product is non-replaceable and if damage occurs must be disposed of responsibly.




This product is suitable for use outdoors but should not be immersed in water/sited in areas likely to be heavily splashed, either from above or below, or subjected to standing water.

This product must be situated indoors when recharged via mains power. The rubber cover must be pushed back and pressed tightly after the product has fully charged and before outdoor use.

Ensure the product is located in a sunny position to ensure effective recharging of the battery.

To test the light and check if it is switched on, cover the solar panel and the light should operate.

Parts list

Description	Image	Quantity
Light fitting		x 1
Base (x 2 washers + x 1 finial fitted)		x 1
USB cable		x 1

Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly.

Step 2

To attach the base (A) first remove the finial and two washers (B) from the stem. Place the product over the base and refit the two washers and finial to secure in place.

Step 3

Connect the USB cable to the product. The charging point is situated on one side of the shade (C) under a rubber cover. Also connect to a USB outlet (phone charger or similar USB outlet rated input max. 5W DC 5V 1A).

Step 4

Charge the battery, which is already fitted to the product before first use until the light indicator turns green. Ensure the product is fully charged before operating. Replace the rubber cover and press tightly in place to prevent moisture ingress into the socket.

Your table lamp is now ready for use. Adjust the angle of the shade by loosening and tightening the handles on the side (D).

To operate the on/off dimmer, push the button (E) on the side of the shade.
(one push low light level, second push brighter, third push brightest and fourth to turn off).

Always unplug after charging. Do not use while charging to extend battery life.

Note:

One side of the shade has a solar panel. Ensure this is orientated upwards when charging to maximise exposure to daylight. If used indoors, the position the lamp on a window sill and face the solar panel towards the window.

