


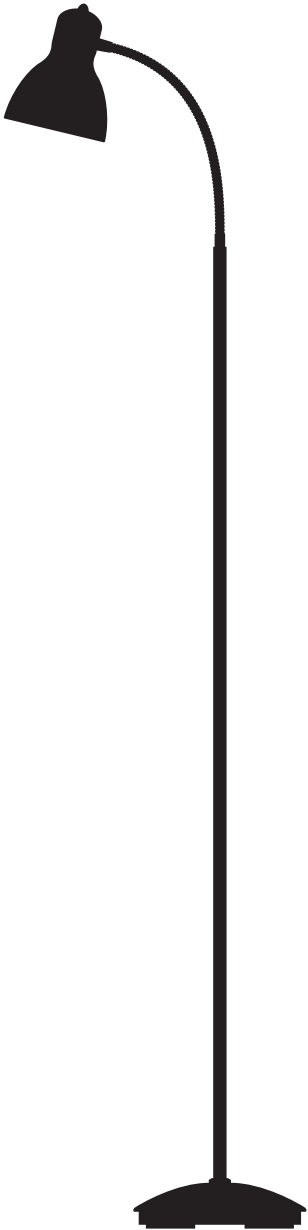


Product information	<ul style="list-style-type: none"> <li>Indoor use only</li> <li>Non-dimmable</li> <li>Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish</li> </ul>
Aftercare and Troubleshooting	If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.
Specification	<p>Max power: 25W  Rated input: 220 –240V, 50Hz  IP rating: 20  Weight: 4.16kg  Lumen output: 345  Colour temperature: Warm white (2700K)</p> <div>  <p>Replaceable (LED only) light source by an end-user</p> </div>
Bulb supplied	<p>1 x 4.6W LED GU10  (GU10 LED bulbs up to 7W can be used)</p> <div> <p><b>Fitting a GU10 bulb</b>  Fit bulb pins into round holes. Then push and twist clockwise to lock.</p> <p>Ensure the bulb fitting tool is clean prior to fitting the bulb. Any traces of dust can be wiped away with a damp cloth.</p>  </div>
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.
Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis &amp; Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit <a href="http://www.recycle-more.co.uk">www.recycle-more.co.uk</a>.</p>



MYKKI FLOOR LIGHT  
USER GUIDE




Product Code:  
12060107

Introduction

Thank you for purchasing this Mykki Floor Light.  
Please read the instructions carefully before  
use to ensure safe and satisfactory operation  
of this product.

Warnings



This is a Class II product and must NOT be earthed.

Please read these instructions carefully before commencing any work.

Your standard lamp has been packaged as separate parts to prevent damage during transit.

When manoeuvring or assembling this product, it must be lifted from the bottom section.




The lamp must be protected by a 3 amp fuse in the mains plug.

If you are in any doubt, please consult a qualified electrician.

For your safety, always switch off the supply before cleaning or adjusting.


If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Always use correct type and wattage bulb. Never exceed the wattage stated.

Parts list		Qty
Lamp		1
Spanner		1
Bulb		1

Product assembly

1

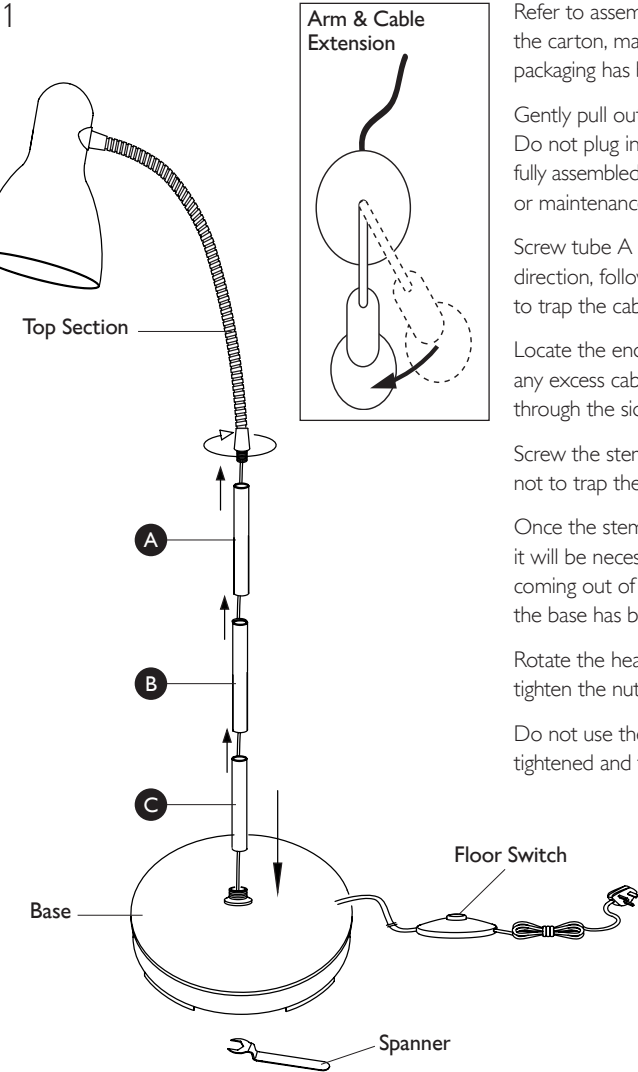

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present and all packaging has been removed before assembly.

Gently pull out the protectors from the tube ends. Do not plug in or use this product until it has been fully assembled. Disconnect from mains during assembly or maintenance.

Screw tube A on to the top section in a clockwise direction, followed by tubes B and C. Take care not to trap the cable or cross the thread.

Locate the end of tube C on to the base. Gently pull any excess cable through from under the base and out through the side of the base.

Screw the stem on to the base thread, taking care not to trap the cable or cross the threads.

Once the stem has been screwed onto the base, it will be necessary to align the head with the cable coming out of the base. The central nut underneath the base has been left slightly loose for this purpose.

Rotate the head to align with the cable and fully tighten the nut. A spanner is supplied for this purpose.

Do not use the lamp until the nut has been fully tightened and the stem is securely fixed.

2

Stand the product upright and check the tightness of the joints.

Fit the bulb per the instructions overleaf.

Your standard lamp is now ready to use. Switch on using the floor switch.