



Adjusting the PIR sensor

The unit must be installed in a vertical position, and fitted 1.8-2.5m above the ground.

To access the adjustment screws, flip down the black cover over the PIR sensor.

The PIR sensor can be adjusted, allowing the detection distance to be altered to suit the location. The detection angle is set at 120 degrees. The duration that the lamp stays on can be altered from (10±5) seconds - (5±1) minutes. The detection distance "SENS" can be adjusted up to 8m. A small tool may be required to adjust the controls. When adjusting in daylight it will be necessary to cover the sensor to simulate night time.

Adjustable up to 8 metres	PIR Adjustment
	
Detection range can be adjusted by turning 'SENS' screw	Duration the bulb stays on is adjustable by turning 'TIME' screw The sensor trigger point is adjustable by turning the 'LUX' screw.

For use

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Recommended bulb

This fitting contains a non-replaceable LED module.



The LED module is protected by a shade. The shade cannot be replaced, if the shade becomes cracked or damaged, this light fitting must be discarded



Non-replaceable light source



Replaceable control gear by a professional

This product contains a light source of energy efficiency class E

For further information please visit: www.lighting-info.co.uk/73682

When adjusting the fitting, always switch off at the mains and allow to cool before handling.

Specification

Maximum wattage: 11W

IP Rating: 44

Voltage: 240V, 50Hz

Weight: 0.6kg

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com




13/12/2022

Please retain these instructions for future reference.

Made in China



SIRO OUTDOOR WALL LIGHT USER GUIDE

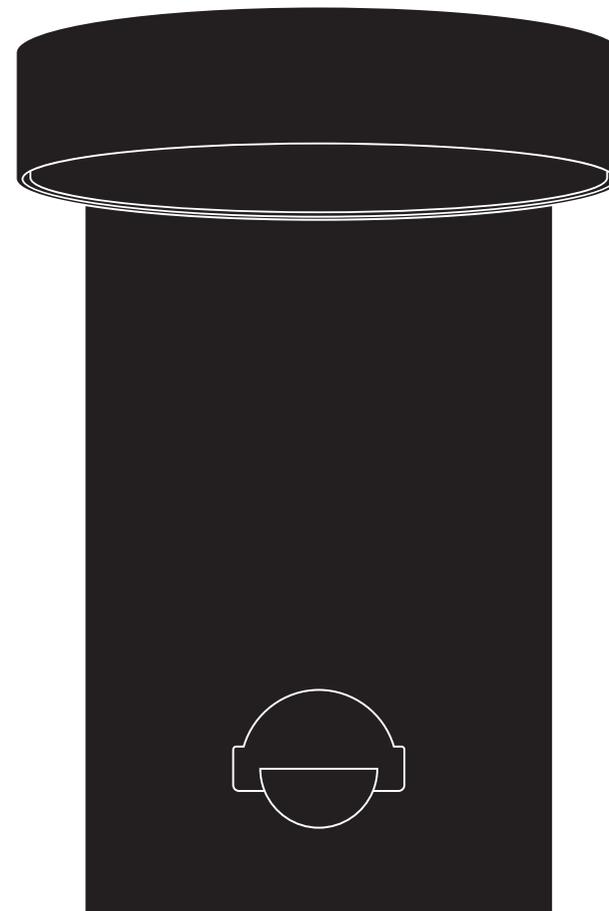

Product Code:
70270501

Thank you for purchasing this Siro Wall Light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This light fitting is Class 1 and must be connected to an Earth circuit

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP44.

This product is not suitable for dimming.

This product is not suitable for location near a marine or sea environment.

The entire unit gets hot whilst on for a period of time.

Parts List

Light Fitting		1	Screws		4
			Wall Plugs		4
			Allen Key		1

Installation Instructions

Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting. Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

- Cables in walls must be protected using suitable conduit or plastic trunking.
- The mains supply cable must have a minimum cross sectional area of 1.0mm²

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Undo the grub screws located on the bottom of the product with the supplied allen key to separate the light fitting from the wall back. Keep screws safe for refitting later.

Step 3

Using the wall back as a template, mark the position of the mounting holes.

Drill holes and fit supplied wall plugs (suitable for masonry only - for other surfaces use appropriate fixings). Pierce the grommet with a sharp object, such as a screwdriver and feed the incoming mains supply cable through the entry hole grommet. Fix the wall back to the wall using the supplied fixings.

Step 4

Wire as detailed below.


Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the terminal block.

All exposed areas of the connection block are covered with 2 layers of good quality insulation tape.

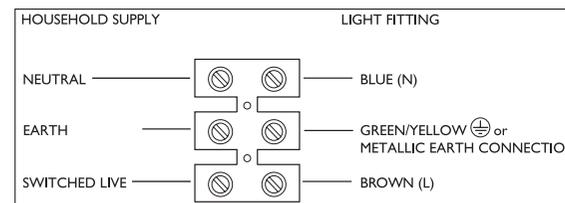


Step 5

Place the light fitting over the top lip at the top of the wall back and gently push towards the wall until the light fitting is flush with the wall back. Make sure the seal is evenly spread around the wall back and metal tabs are in place to ensure ingress projection.

Step 6

Refit the light fitting with the grub screws set aside earlier. Do not overtighten. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

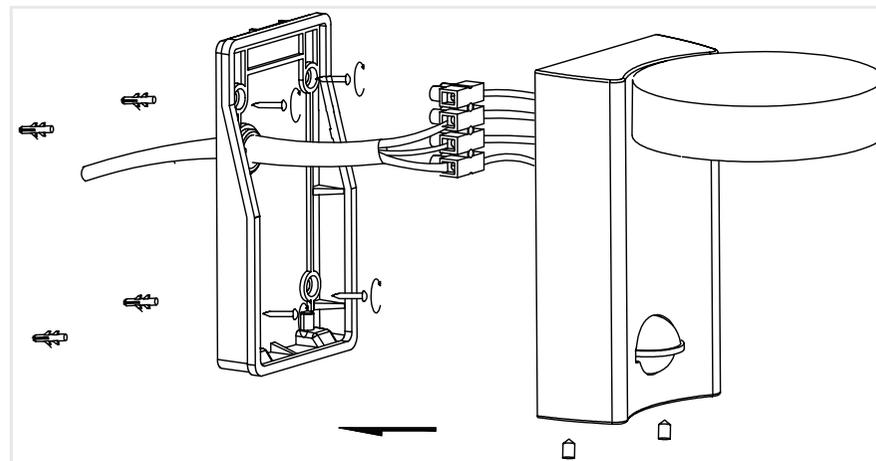

Please note:

The light source must be facing down when installed.

