

Step 6

This product has “L” shaped fixing slots to allow easy fixing to the ceiling strap. Referring to Fig. 1, locate the “L” slots (C) around the small screws (B) on the ceiling strap (A). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

Step 7

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

For use

When cleaning, we recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Specification

Maximum wattage: 5.5W

Voltage: 240V, 50Hz


Weight: 0.96kg



We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

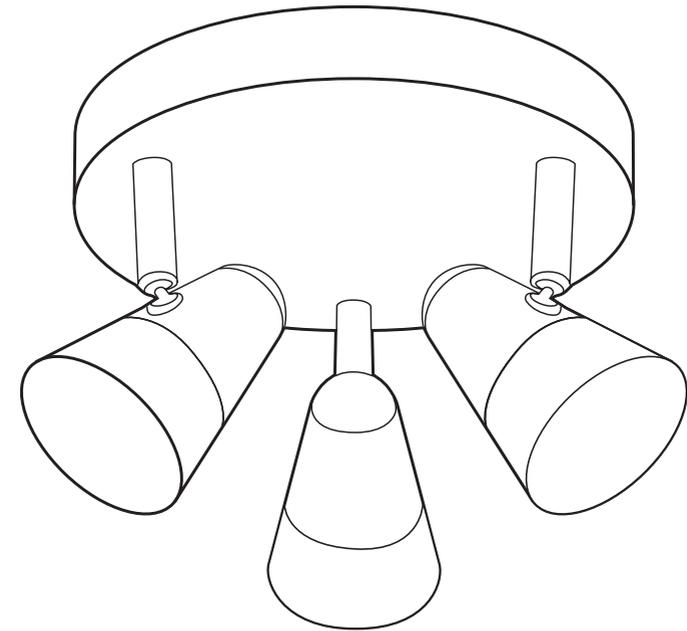

Thank you for purchasing this Polaris 3lt Spotlight. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please keep these instructions for future reference.

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by an electrician. If you are in any doubt, please consult a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a 5 amp fused circuit.

This fitting uses a non-replaceable LED Module. If the LEDs cease functioning the unit must be replaced. This fitting is non-zdimmmable.


This product is suitable for indoor, bathroom use, and is for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. textiles).

For your safety, always switch off the supply before cleaning.

Parts List

Light Fitting		1	Screws		2
			Wall Plugs		2

This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. **If installing in a bathroom a 30mA RCD must be used - in accordance with IEE Wiring Regulations and the Building Regulations.**

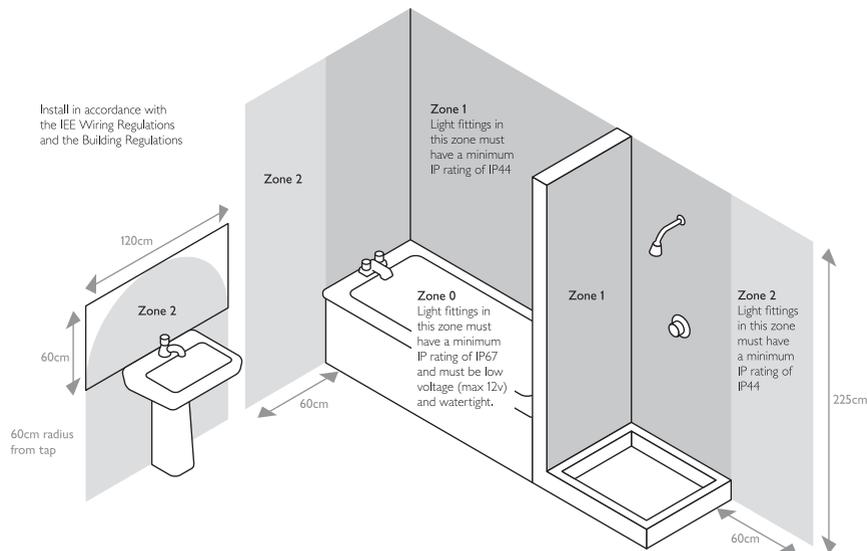

Installation Instructions


Make sure you have the following items which are required to install this light fitting:

- Small electrical screwdriver, cross head screwdriver & insulation tape.

- The installation of this fitting will be much easier with the help of an assistant.


Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.** Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. The ring/loop will remain live unless isolated at the mains or circuit breaker **regardless of the position of the wall switch.**

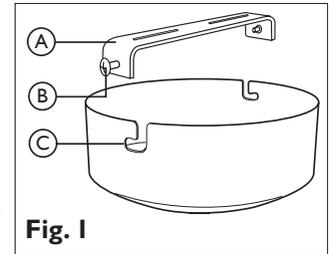

Step 2

Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B). See Fig. 1.

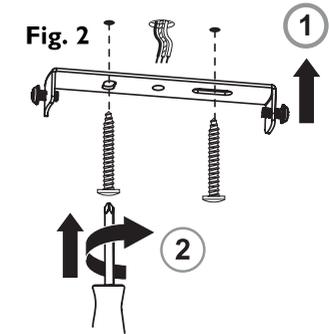


Step 3

Attach to the ceiling using the screws provided. Refer to Fig. 2. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

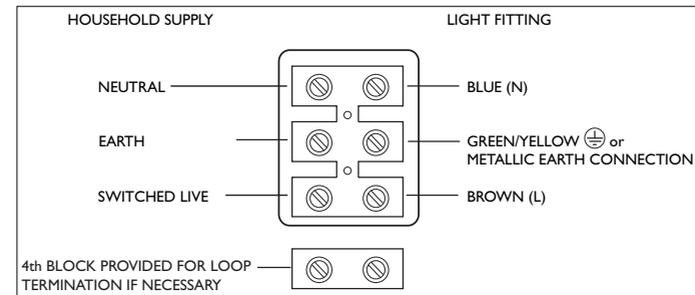

Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

Step 5

When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.