

Recommended bulb

3 x 3.5W LED GU10

Or

3 x 20W halogen GU10

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Specifications

Max. power: 3 x 20W

Voltage: 240V, 50Hz


IP rating: IP44

Weight: 1.01kg



Please retain these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Andorra

3lt spotlight

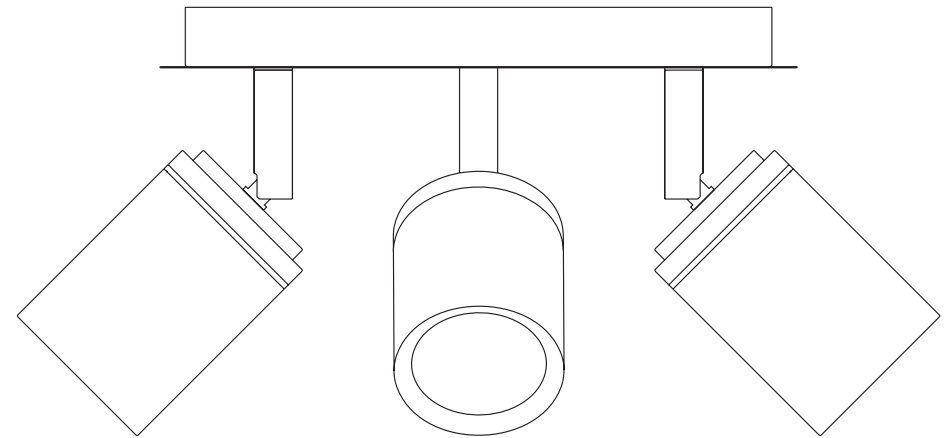


26/10/2018

Thank you for purchasing this Andorra 3lt spotlight. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!




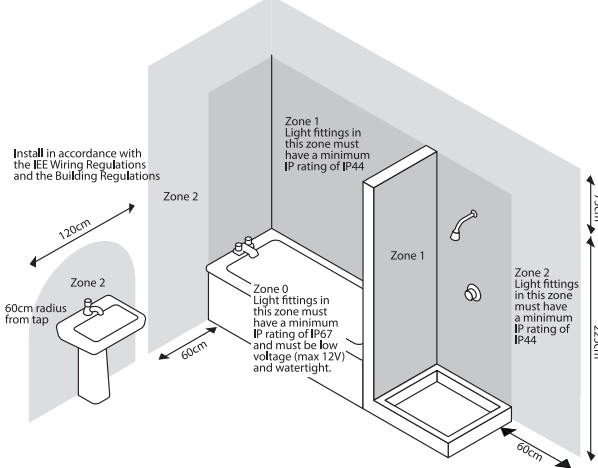

This is a Class I product and must be earthed.
Please read these instructions carefully before commencing any work.
It is recommended that this fitting is installed by a qualified electrician.
Install in accordance with the IEE Wiring regulations and the Building Regulations.
To prevent electric shock switch off at mains supply before installing or maintaining this fitting.
Ensure other persons cannot restore the electrical supply without your knowledge.
If you are in any doubt, please consult a qualified electrician.
This light fitting should be connected to a 5 amp fused circuit.
If replacing an existing fitting, make a note of the connections.
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
Ensure the correct fixings are used for the installation surface.
For your safety, always switch off the supply before changing lightbulbs, cleaning or adjusting the fitting.

 **SPOTLIGHTS GIVE A CONCENTRATED BEAM OF LIGHT AND MUST NOT BE POSITIONED ANY CLOSER THAN 0.5M (50CM) TO THE ILLUMINATED SURFACE.**



This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. **If installing in a bathroom a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations.**

Parts list


| Parts list | Image | Qty | Parts list | Image | Qty |
|---------------|---|-----|------------|---|-----|
| Light Fitting |  | 1 | LED Bulbs |  | 3 |
| Screws |  | 2 | Shades |  | 3 |
| Wall Plugs |  | 2 | | | |

Assembly

Refer to assembly overleaf. Carefully unpack the carton, making sure all the parts are present before assembly.


Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.**



Step 2

Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B). See Figure 1.




Step 3

Attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes. See Figure 2.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.

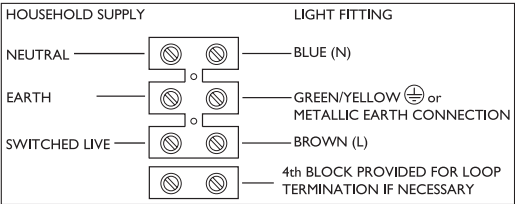


Check that

You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

Step 5

This product has “L” shaped fixing slots to allow easy fixing to the strap. Locate the “L” slots (C) around the small screws (B) on the ceiling strap (A) (see Figure. 1). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

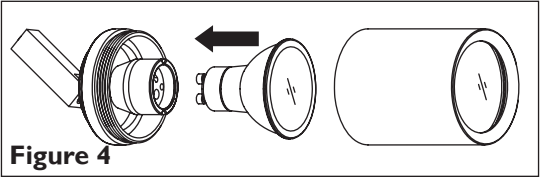

Step 6

Fit the bulbs and shades (as detailed overleaf). Simply screw the shades over the bulbs onto the lampholders. See Figure 4.

Step 7

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.