

## Recommended bulb

18W Watt energy efficient LED

This product contains a non-replaceable LED module. If the LEDs become damaged then the whole product must be replaced.

When moving or cleaning, always switch off at the mains and allow the LEDs to cool before handling.

## Specifications

Max. power: 18W

Voltage: 240V, 50Hz

IP rating: IP44

Weight: 1.42kg


930 lumen output

Colour temperature: Warm white (3000K)



Please retain these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).


We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in China

John Lewis

## User manual Moonbeam Flush

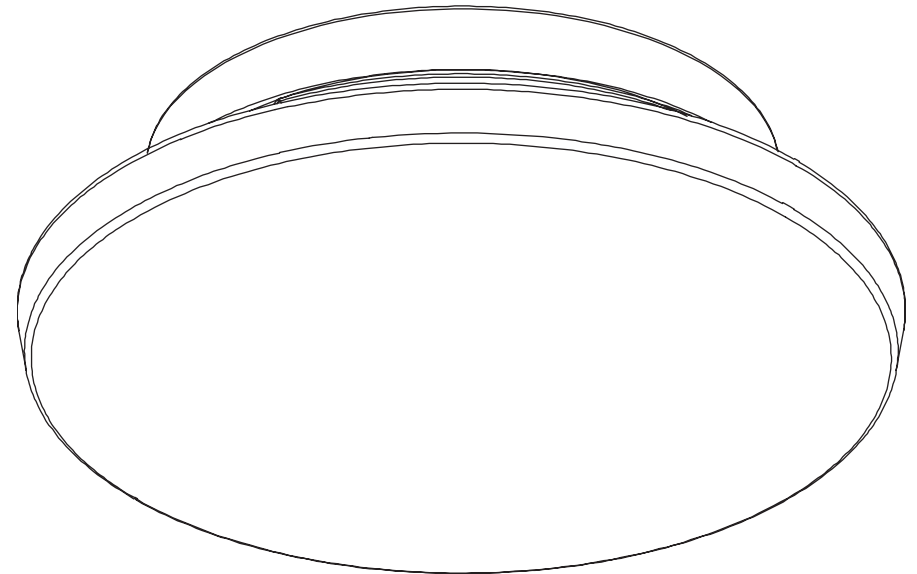

09/05/2019

Thank you for purchasing this Moonbeam flush. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class II product and must NOT be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a 5 amp fused circuit.


This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or adjusting.

This product is not dimmable.

This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. **If installing in a bathroom a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations.**

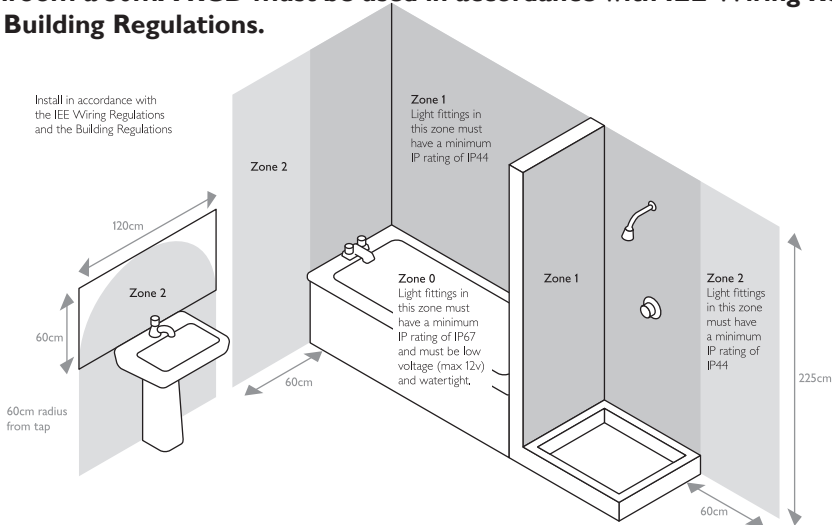

Parts list	Image	Qty
Ceiling Cover		1
Gear tray		1
Shade		1
Washers		6
Screws		3
Wall plugs		3

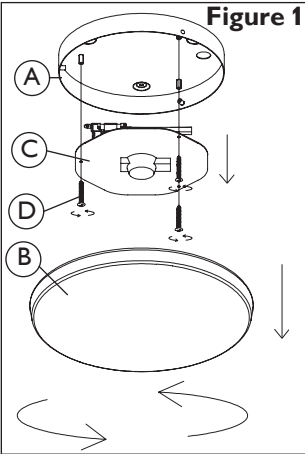


Figure 1

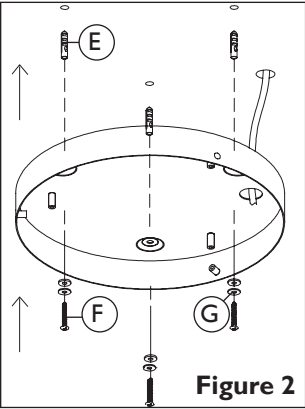


Figure 2

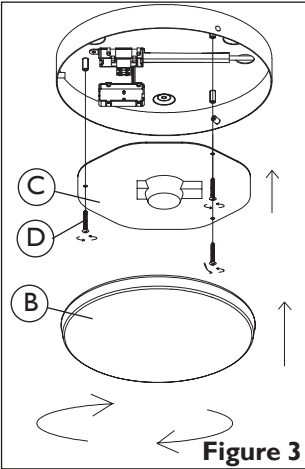


Figure 3

Assembly

Refer to assembly drawing to the side. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.**

Step 2


Refer to Figure. 1. Detach the ceiling cover (A) from the product by firstly unscrewing the shade (B). Then detach the gear tray (C) by removing the 3 screws (D). Keep safe for refitting later.

Step 3

Refer to Figure 2. Attach the ceiling cover to the ceiling using the supplied fixings (E), screws (F) and washers (G).

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

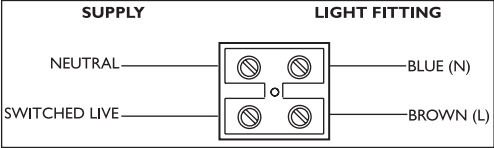

Check that

You have correctly identified the house wires.  
The connections are tight.  
No loose strands have been left out of the connection block.

Step 5

Refer to Figure 3. Refit the gear tray (C) with the screws (D) set aside earlier. Then tighten the shade (B) back on to the ceiling cover.

Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.