

Recommended bulb (not included)

3 x 6 Watt SES energy efficient LED golf

or

3 x 28 Watt SES eco halogen golf

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Specifications

Max. power: 3 x 40W

Voltage: 240V, 50Hz


IP rating: IP20

Weight: 2.73kg



Please retain these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Leaf 3lt

Semi Flush

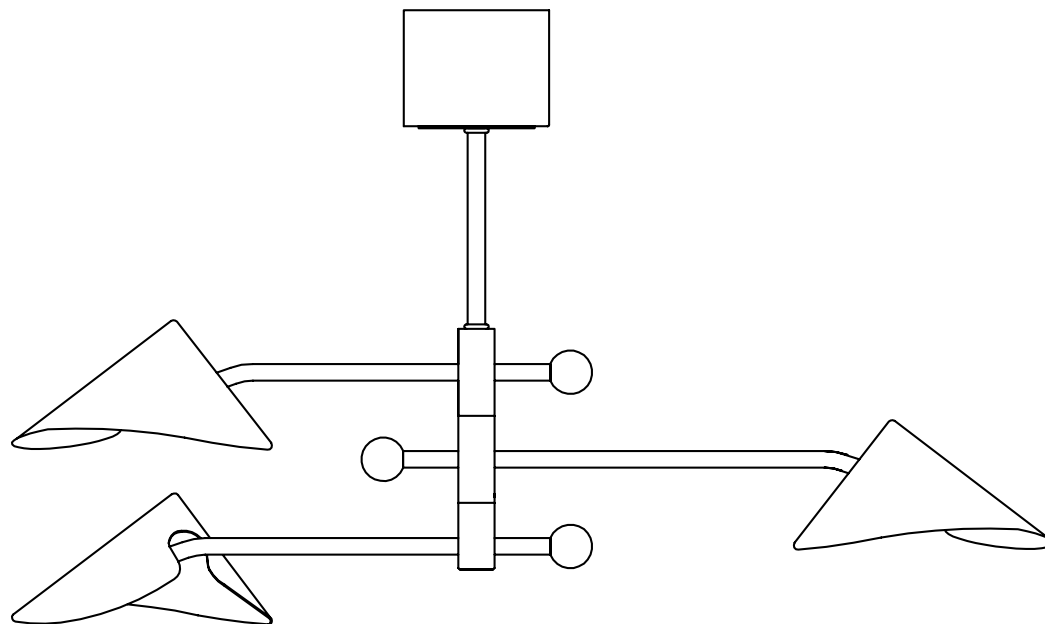




04/10/2019

Thank you for purchasing this Leaf 3lt semi-flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class II product and must NOT be earthed.
For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority
To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.
This light fitting should be connected to a 5 amp fused circuit.
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
Ensure the correct fixings are used for the installation surface.
For your safety, always switch off the supply before cleaning or removing the shades.

Parts list


Parts list	Image	Qty
Light fitting		1
Shade		3
Finials		6

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.**



Step 2: Repositioning Arms

See Figure A. To reduce the packaging, the arms on this fitting have been deliberately moved out of position. Before installation, the arms must be correctly re-positioned by hand into equally spaced positions. Each arm has a spring washer fitted to it to enable the arm to be re-positioned without the need for loosening and retightening the nut. Simply rotate each arm into the correct position.

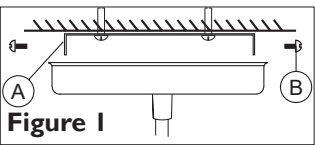


Figure 1

Step 3

See Figure 1. Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B).





Figure 2

Step 4

See Figure 2. Attach the fixing bracket to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 5

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

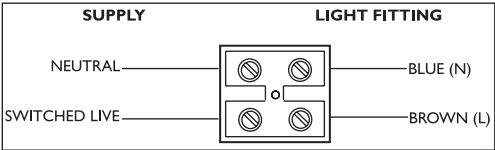

Check that

You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

Step 6

Refer back to Figure 1. Attach the product to the fixing bracket (A), by locating the screws (B) in the bracket into the holes in the ceiling cover and tightening the screws to secure. Take care not to trap any wiring.

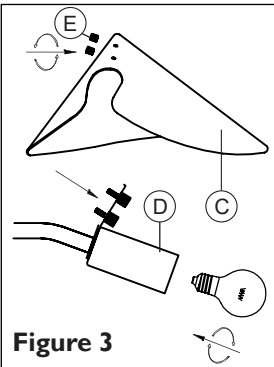


Figure 3

Step 7

Refer to Figure 3. Place the shades (C) over the lampholders (D) and secure in place with the supplied finials (E).

Step 8

Fit the bulbs as per the details overleaf.

Step 9

Refer to Figure 4. The arms can be repositioned via the levers (F).

Step 10

Replace fuse or circuit breaker and switch on. Your light is now ready for use.




Figure 4

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.