

Recommended bulb

1 x 3-6 Watt SES (E14) energy efficient LED golf bulb

or

1 x 28 Watt SES (E14) eco halogen golf bulb

Bulb not included

Specification

Max power: 40W

Voltage: 220~240V, 50/60Hz

IP20

Weight 0.75Kg



Please retain these instructions for future reference.

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis does not operate in store take back, but as members of the Distributer Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

Trouble shooting:

Why is the light not working when switched on?

Check your power supply is switched on

Turn off light and check that the bulb is inserted correctly

Check the bulb is still in working order.

John Lewis partnership

171 Victoria Street

London SW1E 5NN

Johnlewis.com


Made in China

Issue 1 09/19

John Lewis

User manual

BAMBOO WALL LT

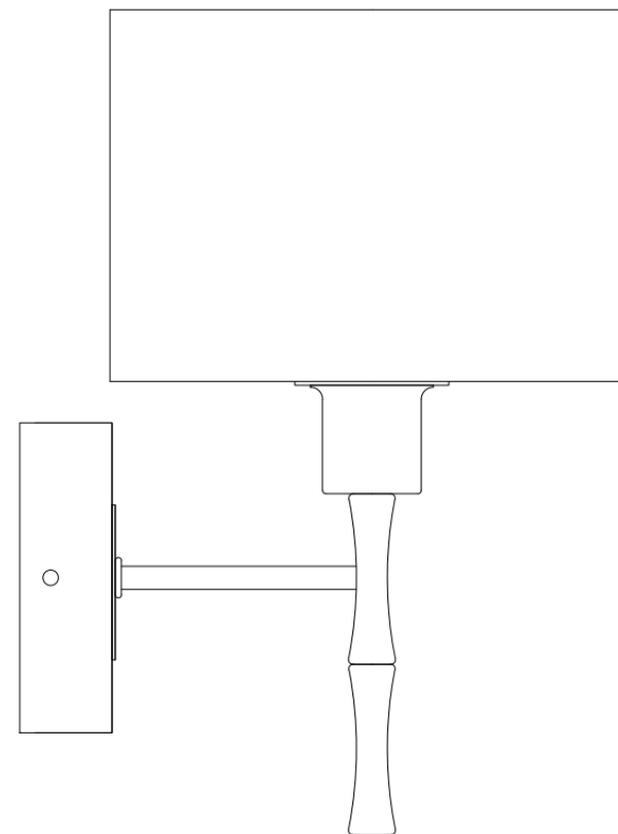

Thank you for purchasing this Bamboo wall light. Please read the instructions carefully before use to ensure safe and satisfactory operations of this product. Please keep this instruction for future reference.

Warnings!

For your safety, this product must be installed in accordance with local Building Regulations.

If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.

Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class II = □ and should be fitted to a lighting Supply protected by a 5 amp fuse or equivalent circuit breaker.

When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.



Caution! The bulb and surrounding parts can become hot during use.
For indoor use only.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Replace bulbs from John Lewis or established brand of the same type and compatibility.


Parts list

Part List	Qty	Part List	Qty	Part List	Qty
A 	1	C 	2	E 	1
B 	1	D 	2	F 	1

Assembly


Never install your appliance on a wet, freshly painted or plastered surface. Ensure the house electricity supply is switched off at the fuse box. If removing an existing fitting, note down all wiring connections. Check the fixings will not touch any existing wiring before drilling and attaching the light to the wall.

Ensure you thread the wall wires through the black insulating tube fixed to the appliance.



Step 1

Remove mounting bracket from fitting by removing the retaining screws and washers, retain for later. Using the mounting bracket as a template, mark and then drill the fixing holes in the wall (ensure the screws are firmly fixed into a solid or other suitable mounting and not just the plasterboard.). Take care not to damage wiring. Attach mounting bracket to the mounting surface using suitable fixings. Do not attach fitting to mounting bracket at this stage. Make sure no wires are trapped in the process.

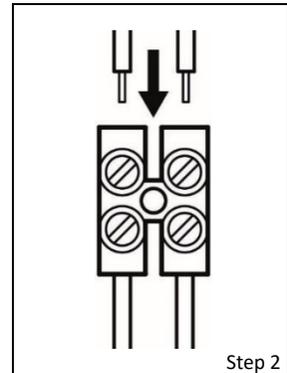


Step 2

Ensuring that the power has been isolated, lever open the terminal block box cover with a screwdriver then feed supply cable through rubber sleeving.

Make the electrical connections as follows:

- Live (Normally brown or red) to fitting live (marked "L")
- Neutral (Normally blue or black) to fitting neutral (marked "N")

NO EARTH must be connected to any part of this fitting. Please note that residential wiring can vary, if you are unsure about the correct polarity please consult a qualified electrician.

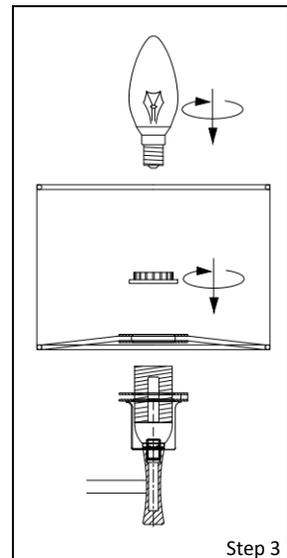

Step 3

Excess cable must be carefully located inside the wall plate or within the wall cavity itself. Carefully offer fitting over mounting bracket then secure in place with the screws and washers removed earlier.

To fit shade: Remove the shade ring from lamp holder, fit the shade and replace shade ring to secure in place. Take care not to overtighten as this may cause damage to the fitting.

Fit the bulb, type and wattage as indicated on the fitting (bulb not supplied). The wattage indicated must not be exceeded.

Installation is complete you can restore the electricity supply.