

## Recommended bulb

1 x 5 Watt G9 energy efficient LED

Bulb not included

## Specification

Max power: 5W


Voltage: 220~240V, 50/60Hz

IP44

Weight 0.4 Kg



Please retain these instructions for future reference.

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis does not operate in store take back, but as members of the Distributer Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please e-mail [lightingparts@JLPspares.co.uk](mailto:lightingparts@JLPspares.co.uk)

## Trouble shooting:

Why is the light not working when switched on?

Check your power supply is switched on

Turn off light and check that the bulb is inserted correctly

Check the bulb is still in working order.

John Lewis partnership

171 Victoria Street

London SW1E 5NN

Johnlewis.com

Made in China


Issue 1 01/20

# John Lewis

## User manual

### RESTORATION RIBBED

### 1 LT WALL

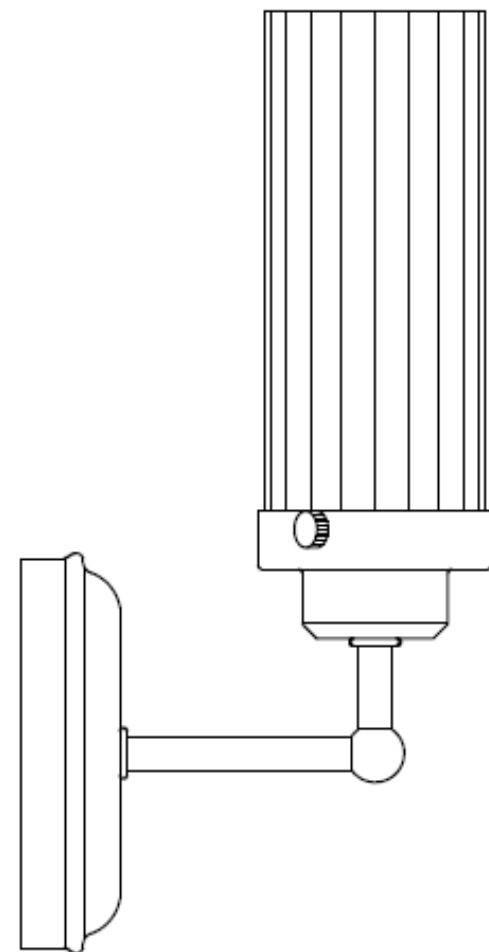

Thank you for purchasing this Restoration Ribbed wall light. Please read the instructions carefully before use to ensure safe and satisfactory operations of this product. Please keep this instruction for future reference.

**Warnings!**

For your safety, this product must be installed in accordance with local Building Regulations.

If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.

Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class I =  $\frac{1}{\text{I}}$  and should be fitted to a lighting Supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker. When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

This fitting is rated IP44 making it suitable for use in Zones 1 & 2 of a bathroom when fitted in accordance with IEE wiring regulations (see diagram overleaf). Fitting must be connected to a supply protected by a 30mA RCD in Zone 1.

**Caution! The bulb and surrounding parts can become hot during use.**








For indoor use only.

**Care instructions**

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Replace bulb from John Lewis or established brand of the same type and compatibility.


**Parts list**

Part List	Qty	Part List	Qty	Part List	Qty
	1		2		1
			1		1
	1		2		

**Assembly**

Never install your appliance on a wet, freshly painted or plastered surface. Ensure the house electricity supply is switched off at the fuse box. If removing an existing fitting, note down all wiring connections. Check the fixings will not touch any existing wiring before drilling and attaching the light to the wall.


Ensure you thread the ceiling wires through the black insulating tube fixed to the appliance.



Step 1

**Step 1**

Remove mounting plate (B) from fitting by removing the retaining screws and any washers, retain for later. Using the mounting plate as a template, mark and then drill the fixing holes in the ceiling (ensure the screws are firmly fixed into a solid or other suitable mounting and not just the plasterboard.) Take care not to damage wiring. Attach mounting plate to the mounting surface using suitable fixings. Do not attach fitting to mounting plate at this stage. Make sure no wires are trapped in the process.



Step 2


**Step 2**

Ensuring that the power has been isolated, Lever open the terminal block box cover with a screwdriver, pierce a hole in the black rubber end cap of the terminal block then feed supply cable through.

Make electrical connections as follows:

- Connect supply live to fitting live (marked "L") on the terminal block.
- Connect supply neutral to fitting neutral (marked "N") on the terminal block.
- Connect the supply earth to the earth (marked " $\frac{1}{\text{E}}$ ") on the terminal block.

**NOTE:** Ensure electrical connections are tight and no loose strands of wire are left out of the connector block. Ensure terminals and rubber sleeve are correctly seated then close connector block housing. Excess cable must be carefully located inside ceiling cup or within the ceiling void.

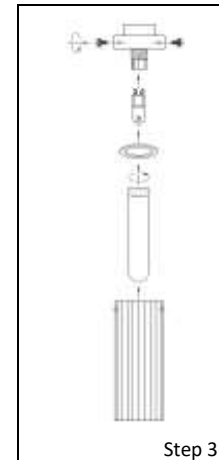

Step 3

Excess cable must be carefully located inside the wall plate or within the wall cavity itself. Carefully offer fitting over mounting bracket then secure in place with the screws and washers removed earlier.

**Step 3**

**Fit the bulb**, type and wattage as indicated on the fitting (bulb not supplied). **The wattage indicated must not be exceeded.** Place the silicone washer over the lamp holder.

**To fit the inner shade:** Offer the shade glass over the lamp holder section, align the treads and carefully screw into place. If cross-threading occurs, undo and start again. Take care not to overtighten as this may cause damage to the fitting.

**To fit the outer shade:** Place the outer glass shade inside the lamp holder housing. Align the holes in the shade with the holes in the housing directly opposite and screw into place using the screws provided to secure in place. Take care not to cross-thread or over tighten as this may cause damage to the glass or the fitting.

Once installation is complete, the electricity may be restored at the fuse box.