

Recommended bulb (not included)

2 x 3 Watt energy efficient LED G9

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Specifications

Max. power: 2 x 3W

Voltage: 220-240V~50Hz

IP rating: IP44

Weight: 0.52kg



Please retain these instructions for future reference.



This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.


We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

John Lewis

User manual Harlow Duo Wall Lights

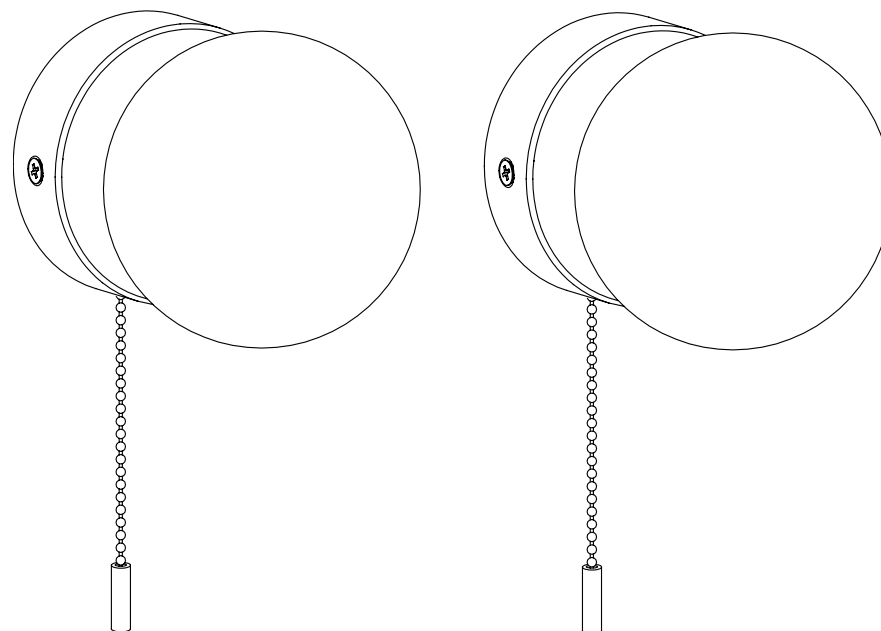

06/03/2020

Thank you for purchasing these Harlow Duo wall lights Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class 1 product and must be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a 5 amp fused circuit.


This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or adjusting.

This product is not dimmable.

This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. **If installing in a bathroom a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations.**

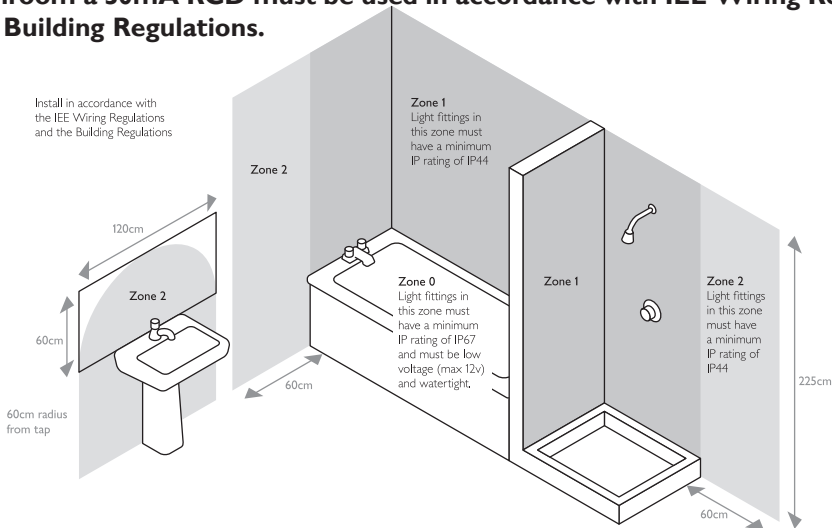

Parts list	Image	Qty
Light Fitting		2
Shade		2
Washers		4
Screws		4
Wall plugs		4

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.




Figure 1

Step 1
Before removing the existing fitting, **carefully note the position of each set of wires.**

Step 2
Refer to Figure.1 Detach the wall back (A) from the product by removing the side screws (B).Keep screws safe for refitting later.





Figure 2

Step 3
Refer to Figure 2. Attach the wall back to the wall using the supplied wall plugs (C), screws (D) and washers (E).

Step 4
Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

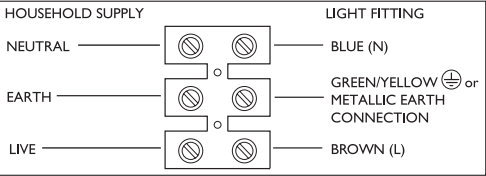

Check that
You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

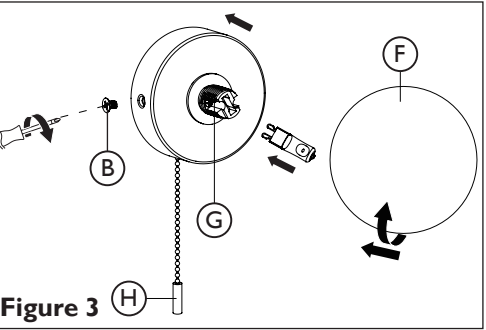


Figure 3

Step 5
Refer to Figure 3. Attach the product to the wall by refitting the side screws (B) set aside earlier. Tighten the screws to secure. Take care not to trap any wiring.

Step 6
Refer to Figure 3. Fit the bulbs as detailed overleaf.

Step 7
Refer to Figure 3. Screw the shades (F) onto the threaded lampholders (G). Do not overtighten.

Step 8
Replace fuse or circuit breaker and switch on. Your light is now ready for use. Switch on using the pull cord switch (H).

Care instructions
We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.