

JOHN
LEWIS
& PARTNERS

CLOVER CEILING LIGHT USER GUIDE



Product code
701 41902

Getting started


Thank you for purchasing this Clover ceiling light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings

For your safety, this product must be installed in accordance with local Building Regulations.

If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.




Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class II =  and should be fitted to a lighting Supply protected by a 5 amp fuse or equivalent circuit breaker.



When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Caution! The bulb and surrounding parts can become hot during use.

For indoor use only.

Parts List

Ref	Description	Qty
	Mounting hook	1
	Screw fixings	2
	Light fitting	1



Product assembly

Height Adjustment: This fitting is height adjustable at point of installation only. No attempt must be made to adjust the height once it has been attached to the ceiling. Open and remove the lower adjustable chain link by loosening the barrel nut located at the side of the link. Using a pair of pliers, carefully open the chain links and remove the required number of links. Reattach the lower removable chain link. Note: The weight of the fitting must be supported by the chain and not the electrical cable.

Gently pull any excess cable through the ceiling cup.

Step 1

Remove mounting bracket (A) from fitting by removing the retaining screws and any washers, retain for later. Using the mounting bracket as a template, mark and then drill the fixing holes in the mounting surface. (ensure the screws (B) are firmly fixed into a solid or other suitable mounting and not just the plasterboard.) Take care not to damage wiring. Attach mounting bracket to the mounting surface using suitable fixings. Do not attach fitting to mounting bracket at this stage. Make sure no wires are trapped in the process.

Step 2

Carefully offer the looped-eye of the fitting (C) located inside the bell-shaped ceiling cup over mounting hook taking care not to trap the wiring in the process. With the full weight of the fitting now supported the electrical installation can commence.

Step 3

Ensuring the power has been isolated, feed the household supply cable through the black rubber sleeve of the terminal block and connect the electrical supply wires to the connector blocks corresponding terminals. Support the fitting weight and make the electrical connection as follows:

- Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block housing.
- Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block housing.

NO EARTH must be connected to any part of this fitting. Please note that residential wiring can vary, if you are unsure about the correct polarity please consult a qualified electrician. Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block then close connector block cover by snapping back together. Excess cable must be carefully located inside the ceiling cup or within the ceiling cavity itself.





Step 4

Slide the bell shaped ceiling cup upwards on the stem until it reaches the ceiling and conceals the mounting hook and wiring. Secure the cup in place by tightening the screw located at the side of the stem. Do not overtighten.

Fit the bulb: type and wattage as indicated on the fitting.

The wattage indicated must not be exceeded.

Once installation is complete, the house electricity may be restored at the fuse box.

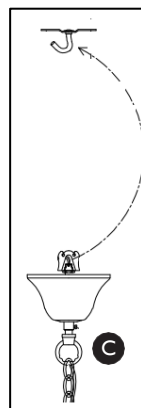

Product information

- Indoor use only
 - Dimmable
 - Replacement bulbs should be the same type and rating, available from John Lewis
 - Partners or other established brands
- Clean the fitting with a soft dry cloth

Aftercare and troubleshooting

If you experience any unresolvable technical issues with the product, contact your nearest John Lewis & Partners shop or John Lewis & Partner Technical Support on 03301 230106.

Why is the light not working when switched on?

Check your power supply is switched on

Turn off light and check that the bulb is inserted correctly

Check the bulb is still in working order.


Specification

Max. power: 28W or 5-7W LED (400-700 lumen) Voltage: 220–240V, 50Hz
IP rating: 20
Weight: 1.2kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards so we are able to offer you a 5 year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

IL4387 Issue 1 05/21

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com



Made in China

Please retain these instructions for future reference