


CRYSTAL GLEAM FLUSH IP44 USER GUIDE

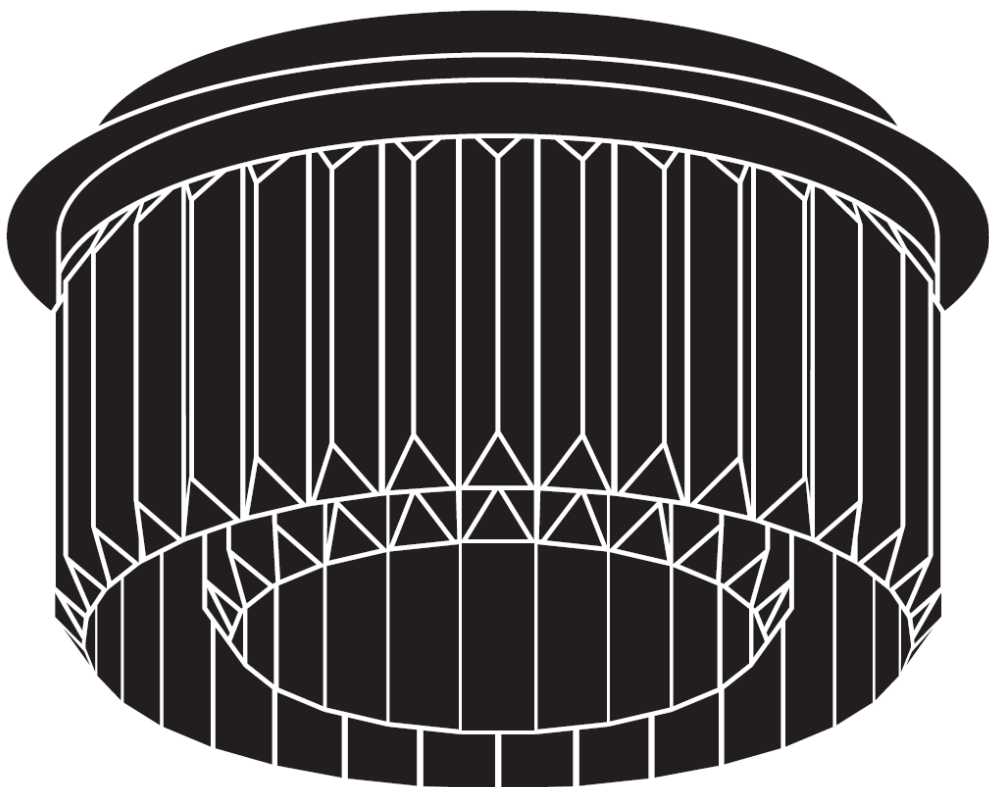

Product code
105 04512

Getting started


Thank you for purchasing this Gleam IP44 flush. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings

For your safety, this product must be installed in accordance with local Building Regulations.

If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.






Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class I =  and should be fitted to a lighting Supply protected by a 5 amp fuse or equivalent circuit breaker.


When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Caution! The bulb and surrounding parts can become hot during use.

For indoor use only.

Parts List


Ref	Description	Qty
	Mounting bracket/cup	1
	Screw fixings	2
	Light fitting	1
	Bulb cover	3
	Crystal droppers	56

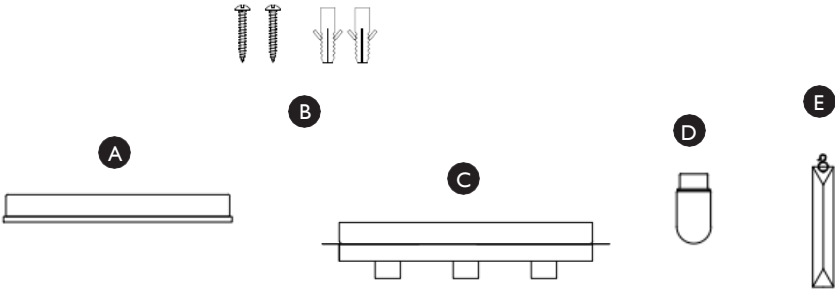

Product assembly

Step 1

Remove mounting cup (A) from fitting by removing the retaining screws and any washers, retain for later. Using the mounting plate as a template, mark and then drill the fixing holes in the ceiling (ensure the screws are firmly fixed into a solid or other suitable mounting and not just the plasterboard.) Take care not to damage wiring. Attach mounting plate to the mounting surface using suitable fixings and any supplied silicone washers (B) Do not attach fitting to mounting plate at this stage. Make sure no wires are trapped in the process.




Step 2

Ensuring that the power has been isolated, pierce a hole in the white rubber grommet located on the back of the ceiling plate and feed the household supply cable through. Lever open the terminal block box cover with a screwdriver, pierce a hole in the black rubber end cap of the terminal block then feed supply cable through.

Make electrical connections as follows:

- Connect supply live to fitting live (marked "L") on the terminal block.
- Connect supply neutral to fitting neutral (marked "N") on the terminal block.
- Connect the supply earth to the earth (marked "⏏") on the terminal block.

Please note that residential wiring can vary, if you are unsure about the correct polarity please consult a qualified electrician. Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block then close connector block cover by snapping back together. Excess cable must be carefully located inside the ceiling cup or within the ceiling cavity itself.



Step 3

Carefully offer fitting (C) over mounting bracket then secure in place with the screws and washers removed earlier.




Step 4

Fit the bulb: type and wattage as indicated on the fitting (bulb not supplied). The **wattage indicated must not be exceeded.**

Step 5


Fit the bulb covers (D): Offer the glass bulb cover over the lamp holder section, align the treads and carefully screw into place. If cross-threading occurs, undo and start again. Take care not to overtighten as this may cause damage to the fitting.




Step 6

Fit the crystal droppers (E): Pass the metal hook fixing at the top of each crystal dropper through the fixing holes on the inside of the light fitting until they come to rest and secured in place.

Once installation is complete, the electricity may be restored at the fuse box.



Product information	<ul style="list-style-type: none">• Bathroom/Outdoor• Dimmable• Replacement bulbs should be the same type and rating, available from John Lewis• Partners or other established brands <p>Clean the fitting with a soft dry cloth</p>
Aftercare and troubleshooting	<p>If you experience any unresolvable technical issues with the product, contact your nearest John Lewis & Partners shop or John Lewis & Partner Technical Support on 03301 230106.</p> <p>Why is the light not working when switched on?</p> <p>Check your power supply is switched on</p> <p>Turn off light and check that the bulb is inserted correctly</p> <p>Check the bulb is still in working order.</p>
Specification	<p>Max. power: 4W LED (250-400 lumen) Voltage: 220–240V, 50Hz</p> <p>IP rating: 44</p> <p>Weight: 4kg</p>
5-year guarantee	<p>At John Lewis & Partners we test every light to high quality standards so we are able to offer you a 5 year guarantee.</p>
Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK.</p> <p>Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.</p>

IL4385 Issue 1 05/21

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China



Please retain these instructions for future reference