



Assembly Instructions Broxton BBQ Shelter

Code: 00037

V3 05 24




CAUTION: CONSTRUCTION INVOLVES WORKING AT HEIGHT. SUITABLE EQUIPMENT REQUIRED.

(W x D x H) 2.20m x 2.20m x 2.49m



ONLINE ASSEMBLY VIDEO AVAILABLE

Please scan the QR code or visit zestoutdoorlivingsupport.co.uk



PLEASE KEEP THESE INSTRUCTIONS

Every Zest product is unique because each piece of timber has its own distinctive, natural features



Zest is a leading timber specialist, designing and manufacturing award winning wooden garden products, crafted from natural slow-grown European redwood. Unlike man-made materials, timber is an entirely natural material, and each piece has its own distinctive qualities. So, owning a Zest timber product is like enjoying a unique slice of nature.

The benefits of slow grown timber:

“Trees grow slowly in the cold climate of Eastern Europe producing stronger and close grained timber ideal for making quality outdoor products.”



Natural and Unique



There may be variations in the timber's colour or shading, but these will fade away over time when exposed to sunlight.



The changing seasons in each year of growth create characteristics unique to each tree - and to every piece of timber. Branches create an embedded mark in the tree trunk, resulting in a knot. Knots are a unique and natural feature which tells the story of the tree.



Owing to timber's natural moisture content, variations in temperature and humidity can cause expansion and contraction and may result in cracks and splits in any product made from natural timber. Any cracks and splits in the timber grain will alter with the changing seasons. They do not compromise the strength and durability of the product - they just add to its unique character.



Most Zest products are pressure treated which protects the timber from rot for many years. Pressure treatment can result in a small amount of 'green spotting' on the surface of new timber caused by natural salts leaving the wood. This will fade away over time.

These visible changes are not a fault or a cause for concern and do not affect the structural integrity of the product. They are a result of how the timber matures and responds to its natural environment.

Ethically Sourced

Zest's slow grown European redwood is sourced from responsibly managed PEFC certified forests. This means forests are used in a way that maintains biodiversity, regeneration, and nature conservation. PEFC tracks certified timber from the forest to the final product giving complete confidence to the customer. www.pefc.co.uk



Replanting

Zest with its main supply partners is dedicated to replanting woodland and is collaborating on the nurture of wildlife habitats.

Advisory Notices

- Roofs are weather resistant and not guaranteed to be watertight unless otherwise stated.
- Items with enclosed storage or cupboard space are weather resistant and are not watertight unless otherwise stated.
- Be aware of trap hazards if a Zest product has moving parts.
- All products should be positioned on solid, level ground
- Anchor down products where applicable using appropriate fixings.
- Roofs are not weight bearing
- Sanitise all catering surfaces prior to use.

Broxton BBQ Shelter Assembly Instructions


Requires 2 Person assembly

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

Please take a few moments to check all pack contents listed


Broxton BBQ Shelter Pack List			
Code	Item	Description	Quantity
08904	A	Side/Back Panel	3
08905	B	Post	4
08906	C	Ring Beam	4
08907	D	Bracing	8
08908	E	Support Beam	1
08909	F	Roof Support	1
08910	G	Roof Panel	4
08911	H1	Shelf Batten Short	1
08912	H2	Shelf Batten Medium	2
08913	H3	Shelf Batten Long	3
08914	J	Back Shelf	1
08915	K1	Side Shelf Right	1
08916	K2	Side Shelf Left	2

09787 - Broxton BBQ Shelter Fixings List		
Item	Description	Quantity
1	4x 35mm Screws	26
2	4x 60mm Screws	95

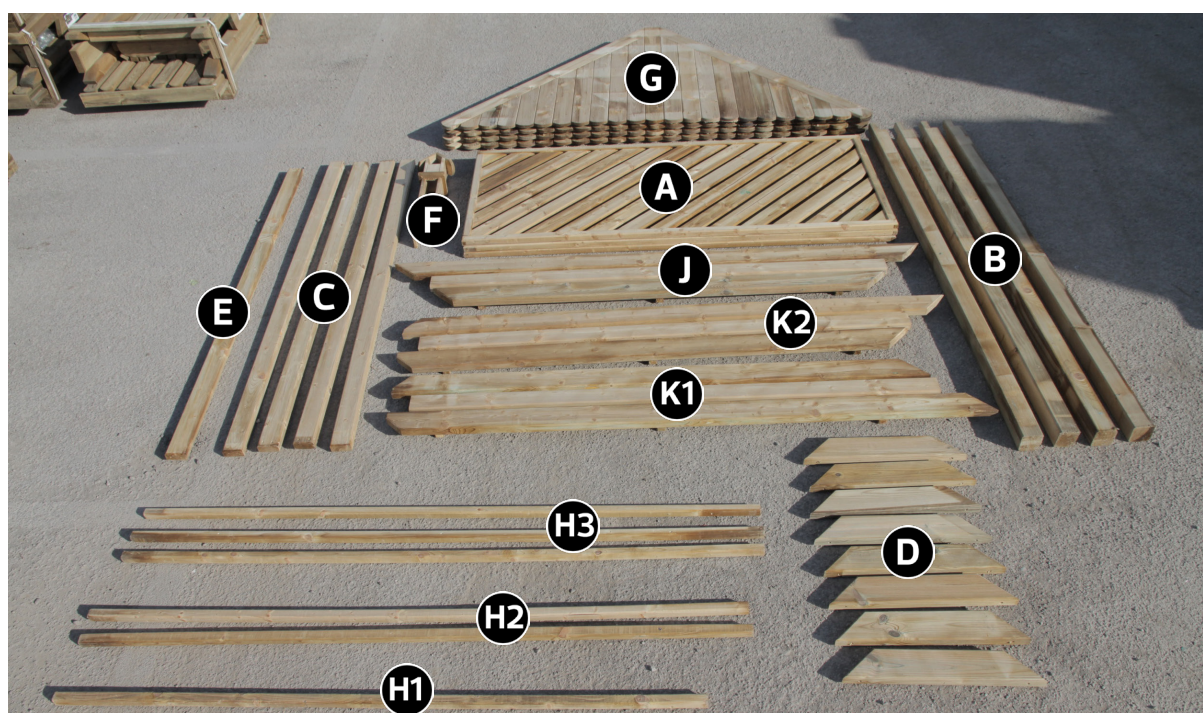


This product is made from pressure-treated timber. It should not be painted or coated with any other treatment until at least 6 months after purchase

1

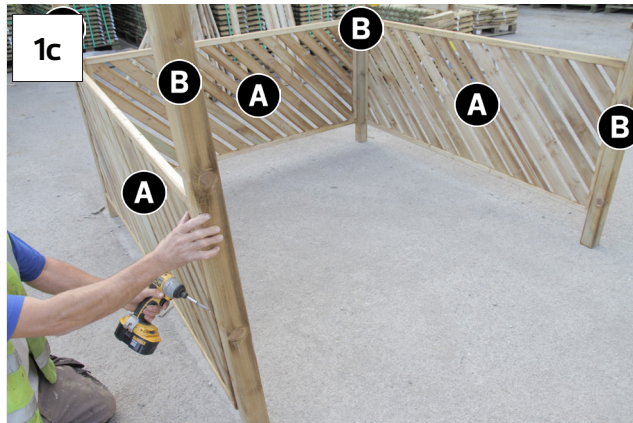


Attach Back Panel A to 2x Posts B at a nominal height of 150mm from base of posts, ensuring notches (cut outs) to posts are positioned externally and panel is flush with back of post using 6x 60mm screws (3 per post). (See Fig.1a) Attach Side Panels A to post/panel assembly using 6x 60mm screws (3 per post). (See Fig. 1b)
Fix Side Panels A to remaining Posts B using 6x 60mm screws (3 per post) ensuring notches in posts are positioned externally. (See Fig. 1c)

2

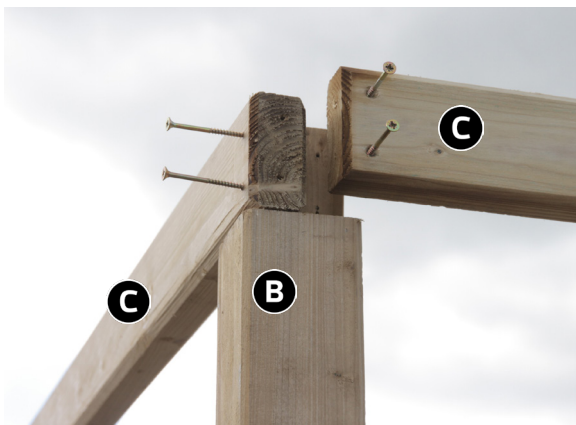

Position and fix Ring Beams C as shown in Fig. 2 using 4x 60mm screws (2 per beam). Repeat procedure for remaining posts and beams using 12x 60mm screws (4 per post).

3

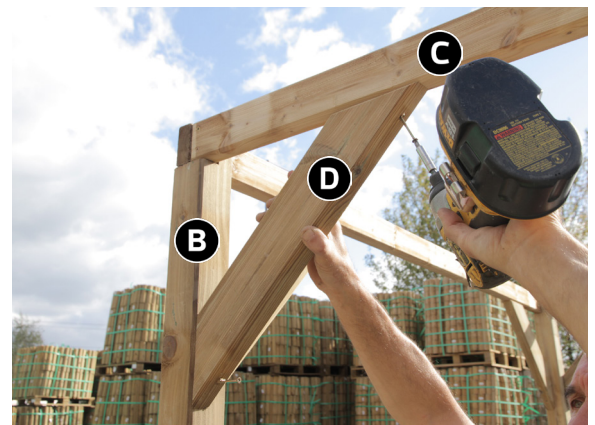


Fix 8x Bracings D to posts and ring beam assembly using 16x 60mm screws (2 per bracing). (See Fig. 3)



Fix Support Beam E centrally along ring beam assembly as shown in Fig. 4a using 4x 60mm screws. Position Roof Support F to the centre of Support Beam E and fix using 2x 35mm screws. (See Fig. 4b)



Locate Roof Panel G on to ring beam assembly and Roof Support F and fix in position using 6x 35mm screws (1 to Roof Support, 5 to ring beam). Repeat procedure for remaining 3 panels using 18x 35mm screws (6 per panel). (See Figs. 5b & 5c)

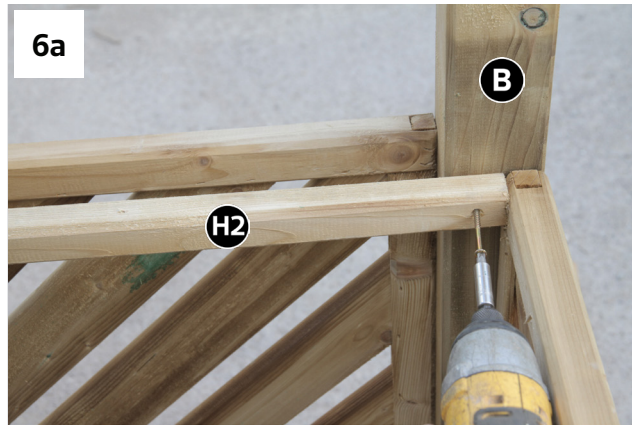

Attach Shelf Support Battens (Med.) internally to left and right hand posts using 4x 60mm screws (2 per batten). (See Fig. 6a)

Attach Shelf Support Batten (Short) internally to top of back panel using 4x 60mm screws. (See Fig. 6b)

Attach Shelf Support Battens (Long) externally as shown in Figs. 6c & 6d using 15x 60mm screws (5 per batten).



Position Back Shelf J and Side Shelves K onto shelf support battens and fix in position using 18x 60mm screws (6 per shelf). (See Fig. 7)



Your Product is now complete