

Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 1 x 7W
Recommended bulb:
7W LED E27 GLS bulb for maximum brightness.
Lower wattages are also suitable.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 20
Weight: 0.68kg

5-year guarantee


At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.



MILLHOUSE WALL LIGHT USER GUIDE

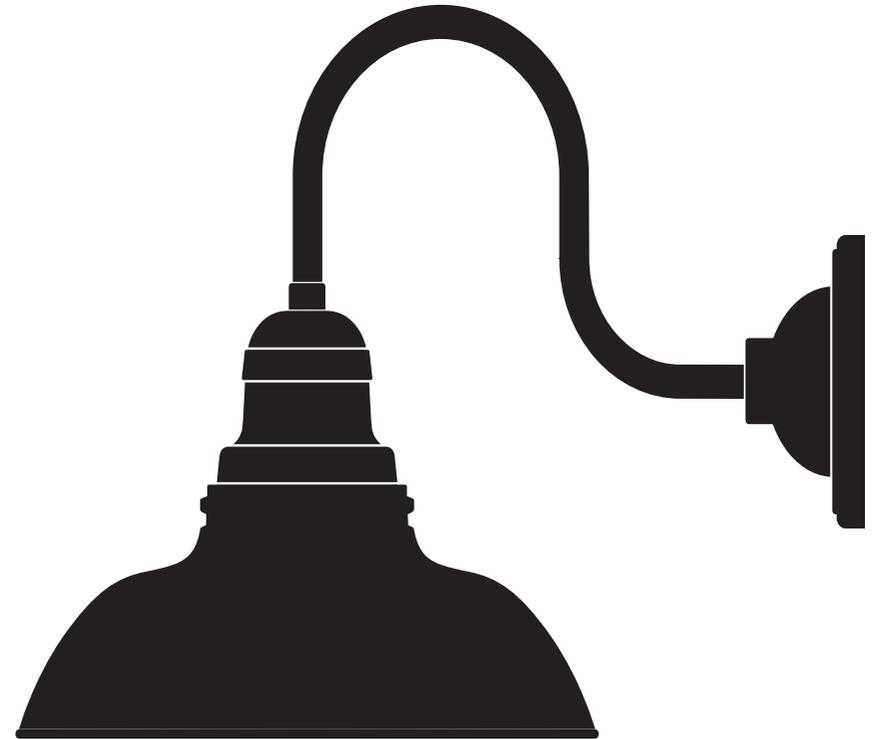

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China



29/08/2024

Please retain these instructions for future reference.





Product Code:
70250311
70259528
70259529

Introduction

Thank you for purchasing this Millhouse wall light.
Please read the instructions carefully before
use to ensure safe and satisfactory operation
of this product.


Warnings

- ⚠ This is a Class II product and must NOT be earthed. Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Society. To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is suitable for indoor use only. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.

Parts list	Image	Qty
Light fitting		1
Screws (C)		2
Wall Plugs (B)		2
Shade		1
Shade ring (D)		1

Product assembly


1

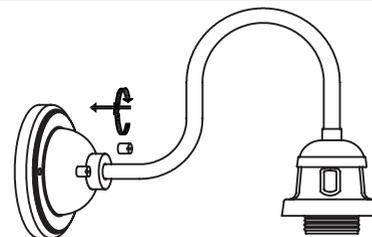

Refer to assembly diagrams. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.


Remove the finials from the front of the product and lift the light fitting body away from the wall back. Keep the finials in a safe place for use later.

2

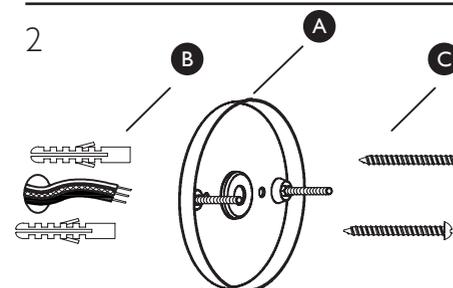

Using the wall back (A) as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (B). Take care to avoid damaging any concealed wiring and pipes. Feed the incoming mains supply cable through the entry hole. Fix the wall back (A) to the wall using supplied screws (C).

3

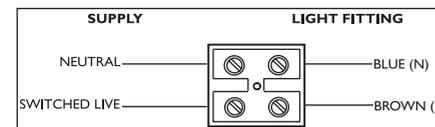


Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown on the diagram to the left.

Check that:


- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

4

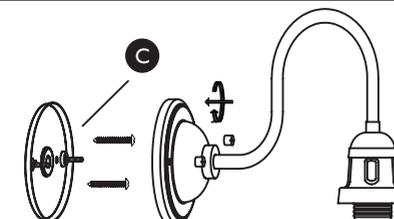

Place the light fitting over the threads of the securing screws (C). Take care not to trap any wiring and refit finials to secure. Make sure the fitting is correctly oriented.

5

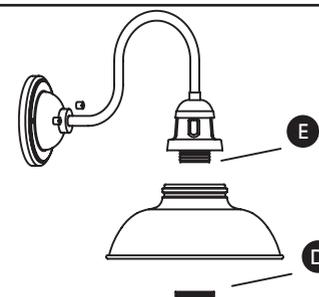

To attach the shade remove shade ring (D) from threaded body (E), place shade over threaded body (E) and replace the shade ring (D), tighten with light pressure. Fit the recommended bulb. Replace fuse or circuit breaker and switch on. Your light is now ready to use.