



ASSEMBLY AND CARE INSTRUCTIONS

Sanctuary 1.5m x 3m BBQ Gazebo



This is an important document.

Please retain for future reference.

Please keep your receipt of purchase. Please note we are unable to process any warranty claim without proof of purchase.

Care Instructions

- Ensure that the adjustable roof slats are fully open during windy conditions to prevent damage. Closing the slats tightly could trap wind and cause structural issues.
- Each additional wall or accessory comes with its own set of instructions, provided in the box specific to that component. Do not install any additional parts to the main gazebo without first consulting this secondary instruction manual.
- Clean the aluminium frame and slats using warm soapy water and a soft cloth. Avoid using abrasive materials or harsh chemicals, which could damage the wood-effect finish.
- Keep the drainage holes clear to ensure proper water flow and avoid standing water on the roof during rain. This will help prevent damage or rusting.
- Keep flames or sources of extreme heat away from the structure to avoid potential damage to the materials, including the aluminium frame and wood-effect finish.
- Handle the LED lighting with care, following the instructions, particularly regarding the electrical components and wiring.
- Please ensure the product is properly secured to the ground once assembled.


Necessary Tools



You will find a pack within this box tied to a red ribbon which contains the fittings.




















WARNING – the fittings pack contains **SMALL ITEMS** which are a potential choking hazard and should be kept away from children at all times.

Assembly Requirements













| | |
|---------------------------------------|---|
| Number of people required to assemble |  |
| Approximate Assembly time | 5 hours |

Read this leaflet in full before commencing assembly.

Part List Supplied

| | | | |
|----|-------------------------------|--|------|
| A | LEG TUBE 1 |  | 2 |
| A3 | FRONT LEG TUBE |  | 2 |
| B1 | BACK BEAM TUBE |  | 2 |
| B4 | RIGHT BEAM TUBE |  | 1 |
| B5 | LEFT BEAM TUBE |  | 1 |
| C | LOUVRE |  | 10 |
| D | COVER FOR LEG TUBE |  | 4 |
| D2 | COVER FOR LEG TUBE 1 |  | 2 |
| E | FOOTPLATE COVER |  | 4 |
| E1 | FOOTPLATE COVER 1 |  | 2 |
| F | FOOTPLATE |  | 4 |
| F1 | FOOTPLATE 2 |  | 2 |
| G | TURBO |  | 1 |
| H | ROCKER |  | 1 |
| J | LOUVRE CAP WITHOUT HOLE RIGHT |  | 10+1 |
| J2 | LOUVRE CAP WITHOUT HOLE LEFT |  | 10+1 |
| K | PLASTIC PARTS 1 |  | 20+2 |
| L | PLASTIC PARTS 2 |  | 10+2 |
| Q | BEAM CONNECTOR |  | 2 |


Part List Supplied

| | | | |
|----|-------------------|--|------|
| AA | SCREW M6*15 |  | 20+2 |
| BB | SCREW M6*25 |  | 8 |
| CC | SCREW ST4.8*10 |  | 20+2 |
| DD | SCREW M5*18 |  | 1 |
| EE | EXPANSION SCREW |  | 20 |
| FF | CROSS SCREWDRIVER |  | 1 |
| GG | ALLEN KEY S2.5 |  | 1 |
| HH | ALLEN KEY S4 |  | 2 |
| JJ | SPANNER |  | 1 |
| KK | SPANNER |  | 1 |
| LL | SCREW M8*25 |  | 2 |
| MM | SCREW M8*170 |  | 4 |


| | |
|--|--|
| Silicone neutral glass glue, purchased by customers |  |
|--|--|

Note: STEP 01~19 is the assembly for BBQ Gazebo only.
STEP 20~62 is the assembly for BBQ Gazebo and 3 x 3m Gazebo together.

STEP 01 ————— STEP 19


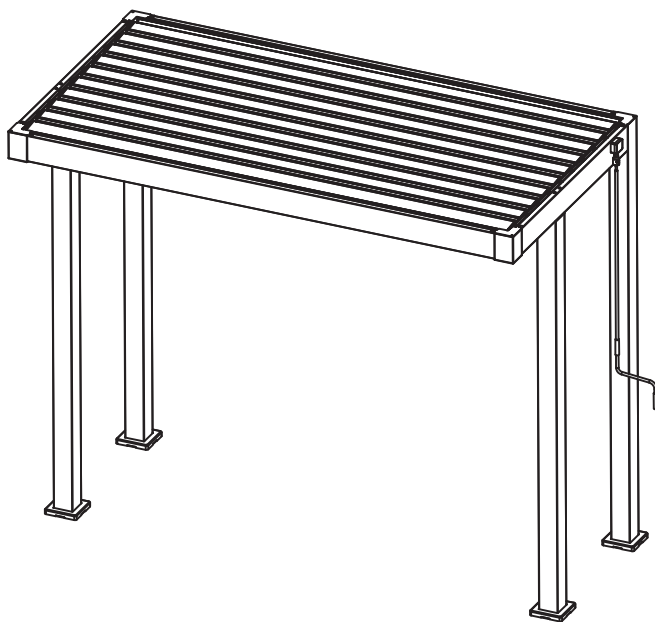


STEP 20 ————— STEP 62

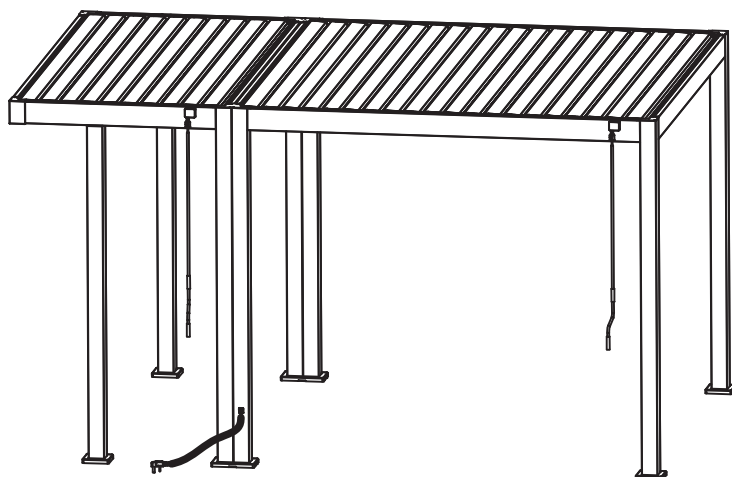

Assembly Instructions

STEP 01

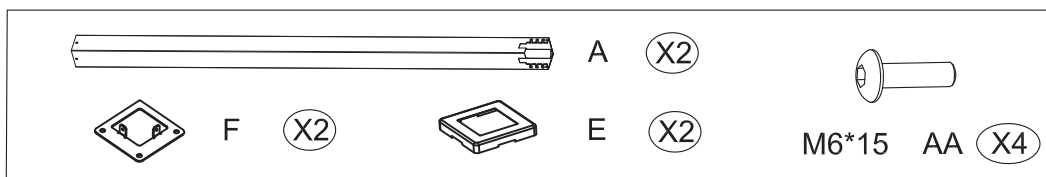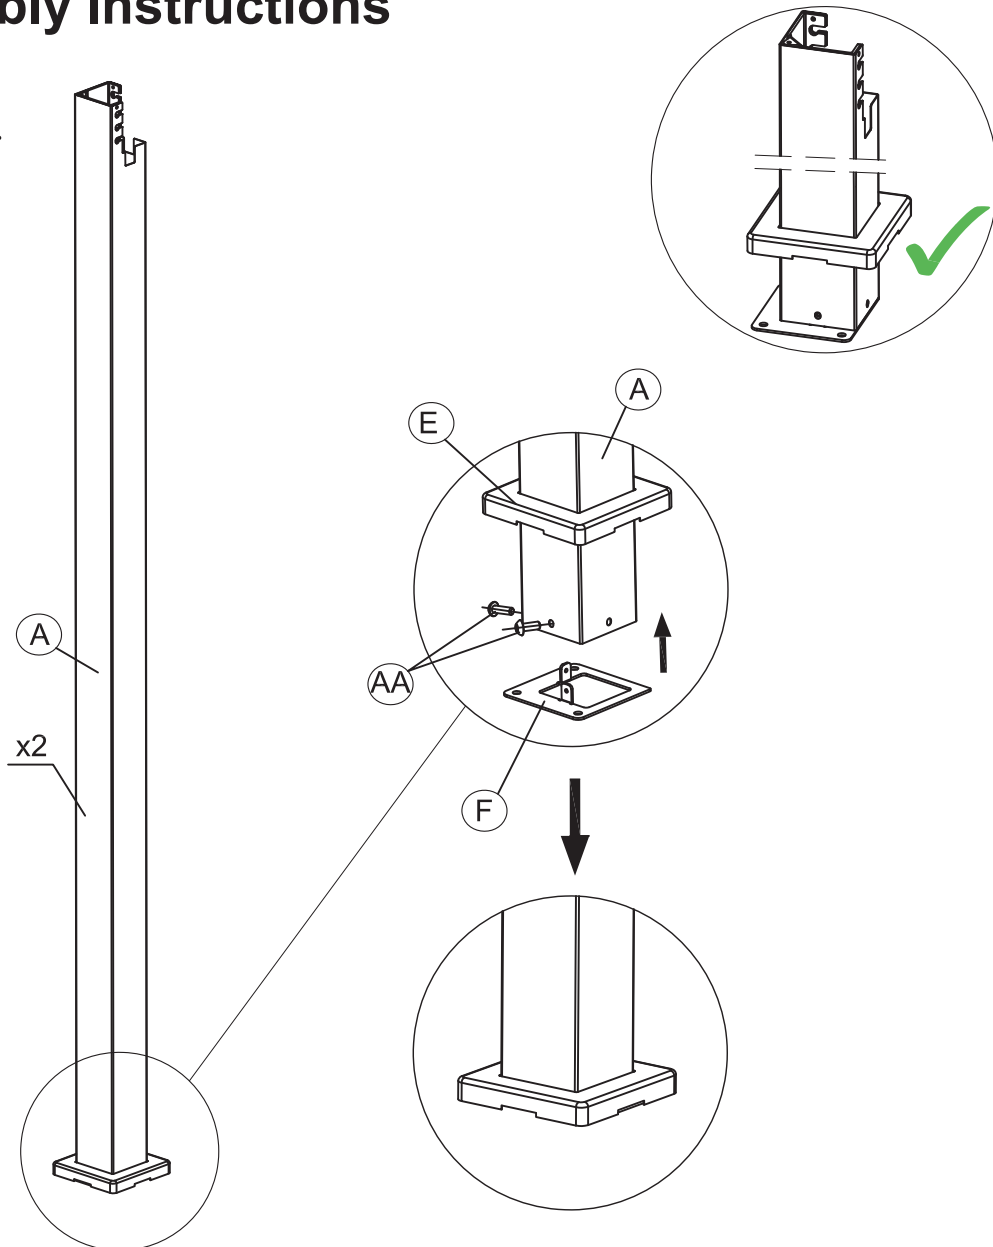

Slide the Footplate Cover 1 (E) over the base of Leg Tube (A).



Place the Footplate (F) right under the Leg Tube (A).

Ensure the directions of the Footplate (F) and the Leg Tube (A) are the same as shown.
Use the M6*15 Screws (AA) to secure the footplate and cover to the leg. Insert 2 screws into each leg.

Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 02

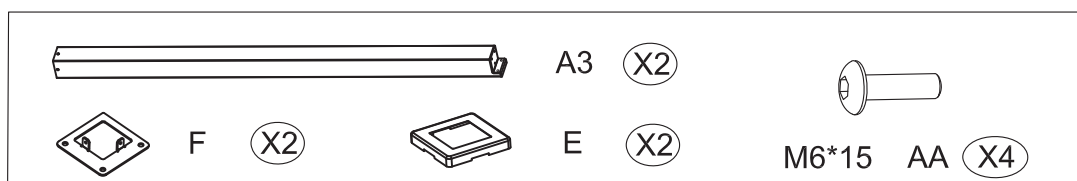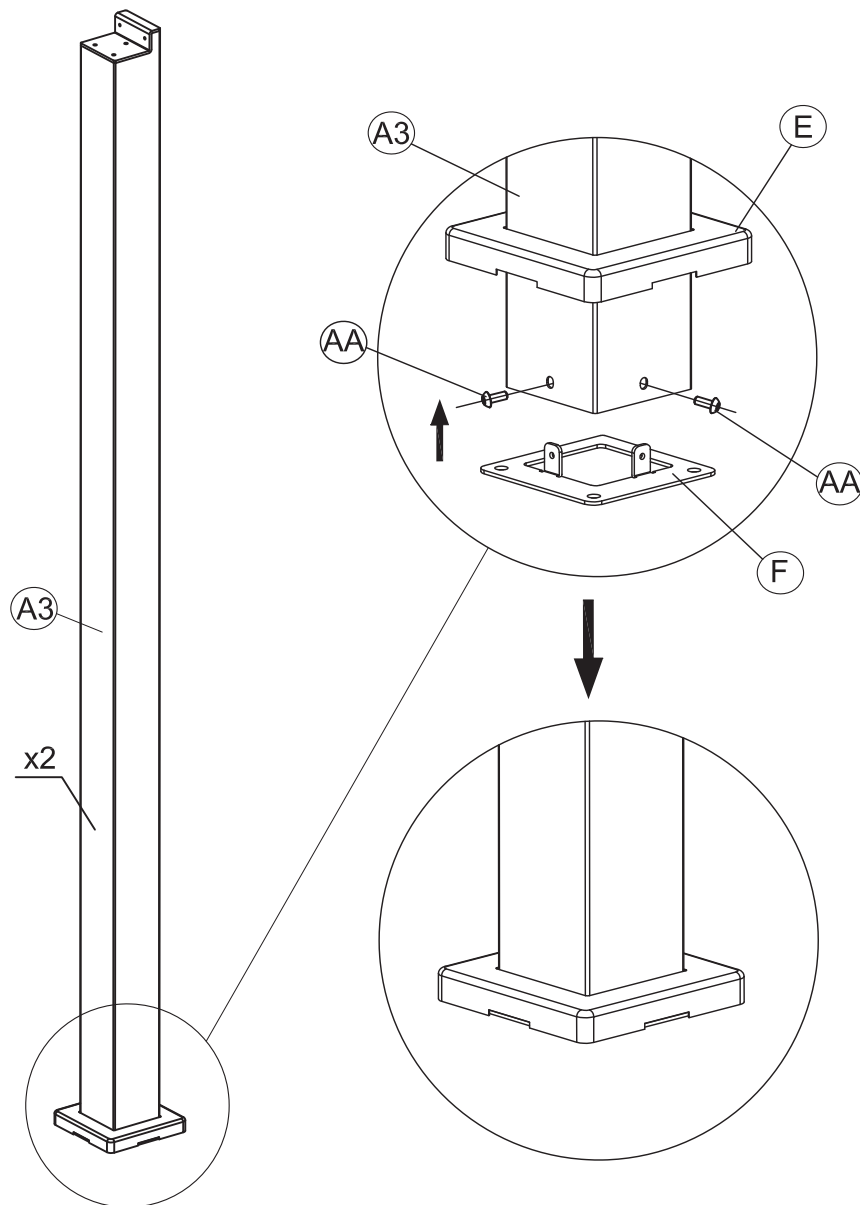

Slide the Footplate Cover 1 (E) over the base of Front Leg Tube (A3).
Place the Footplate (F) right under the Front Leg Tube (A3).
Ensure the directions of the Footplate (F) and the Front Leg Tube (A3) are the same as shown.
Use the M6*15 Screws (AA) to secure the footplate and cover to the leg.
Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 03

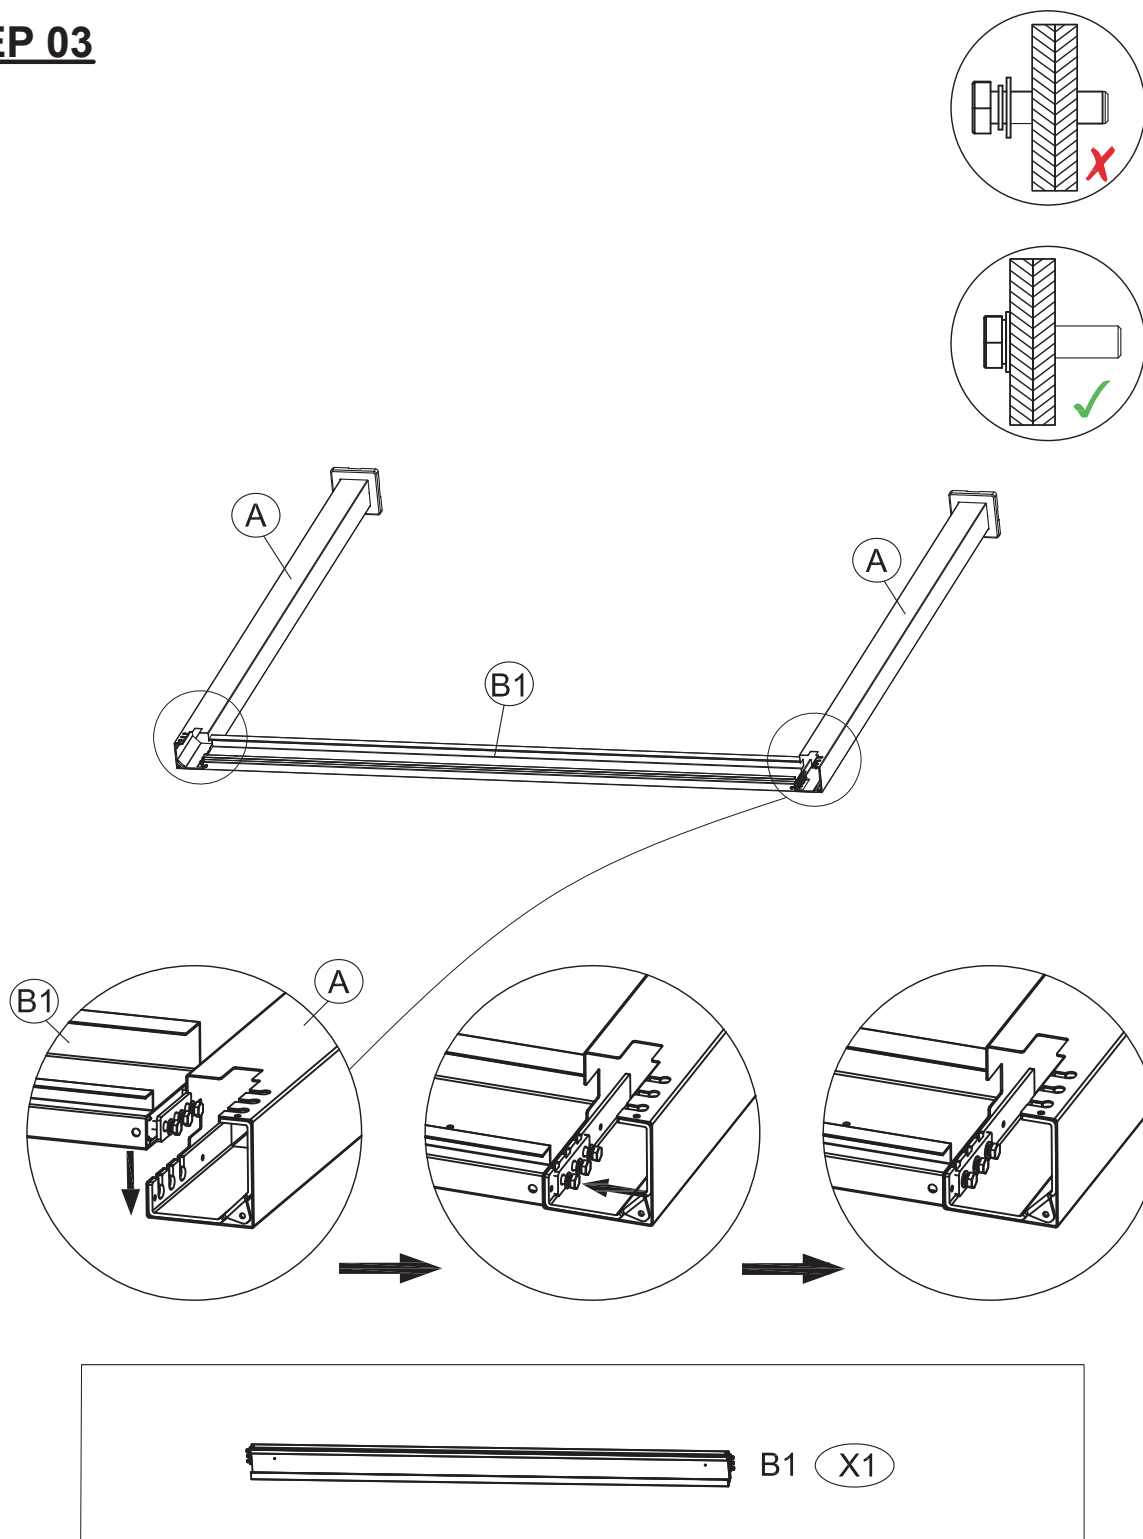

Connect the Back Beam Tube (B1) to Leg tube (A) as shown. Ensure the beam is properly slotted into the leg, aligning the connectors securely. Tighten the screws, but leave them slightly loose for adjustments. Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 04

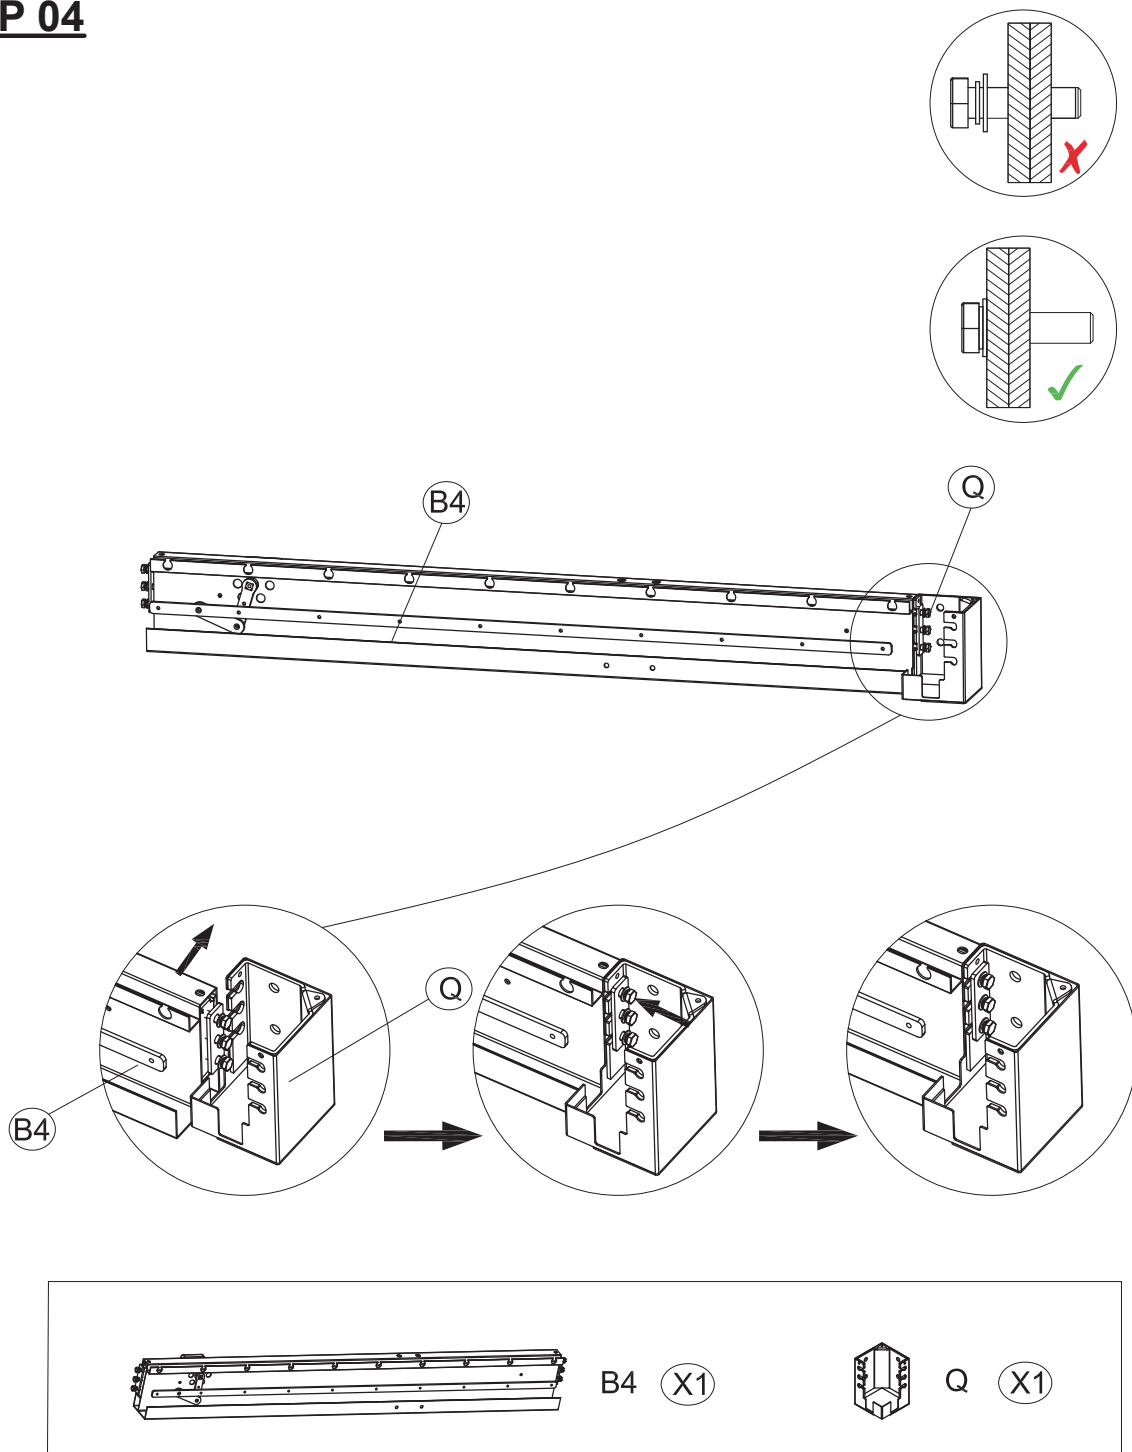

Connect the Beam Connector (Q) to the Right Beam Tube (B4) as shown. Ensure the connector is properly slotted into the beam, aligning securely. Tighten the screws, but leave them slightly loose for adjustments. Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 05

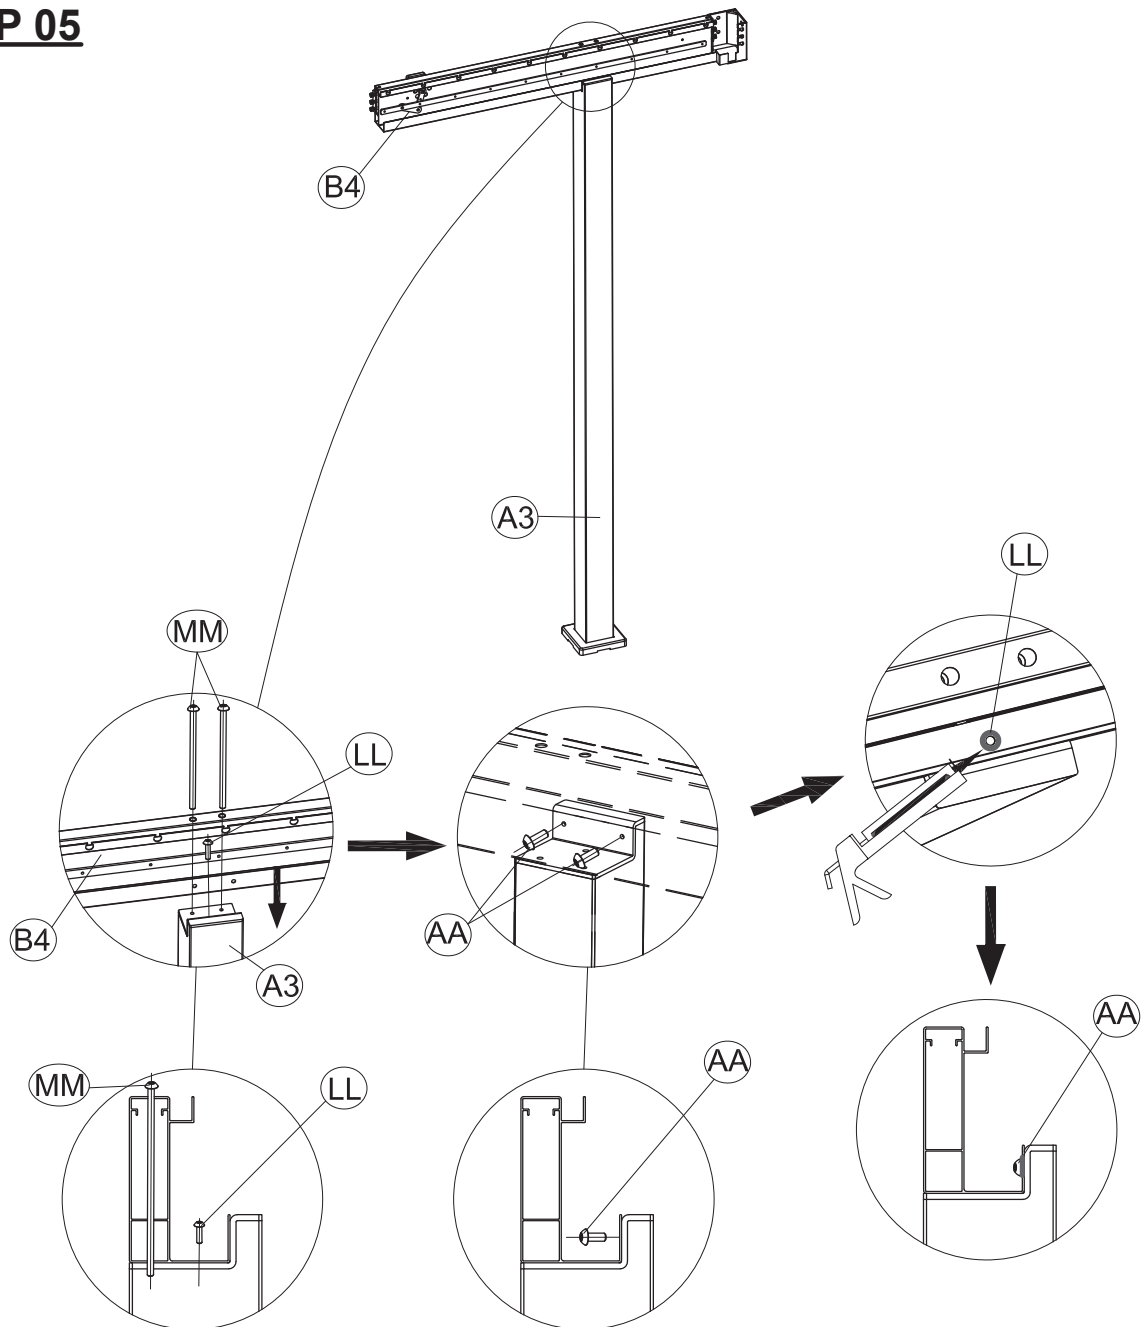

 M8x170 MM (X2)



 M6x15 AA (X2)

 M8x25 LL (X1)

Connect the Right Beam Tube (B4) with Front Leg Tube (A3) as shown.


Insert the screws (AA&LL&MM) into different screw holes as shown.

Apply silicone neutral glass glue (not provided) along the screw LL as shown in the diagram. Ensure an even application of the glue to prevent any potential leaks.

Note: glue is needed here to prevent water leakage

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 06

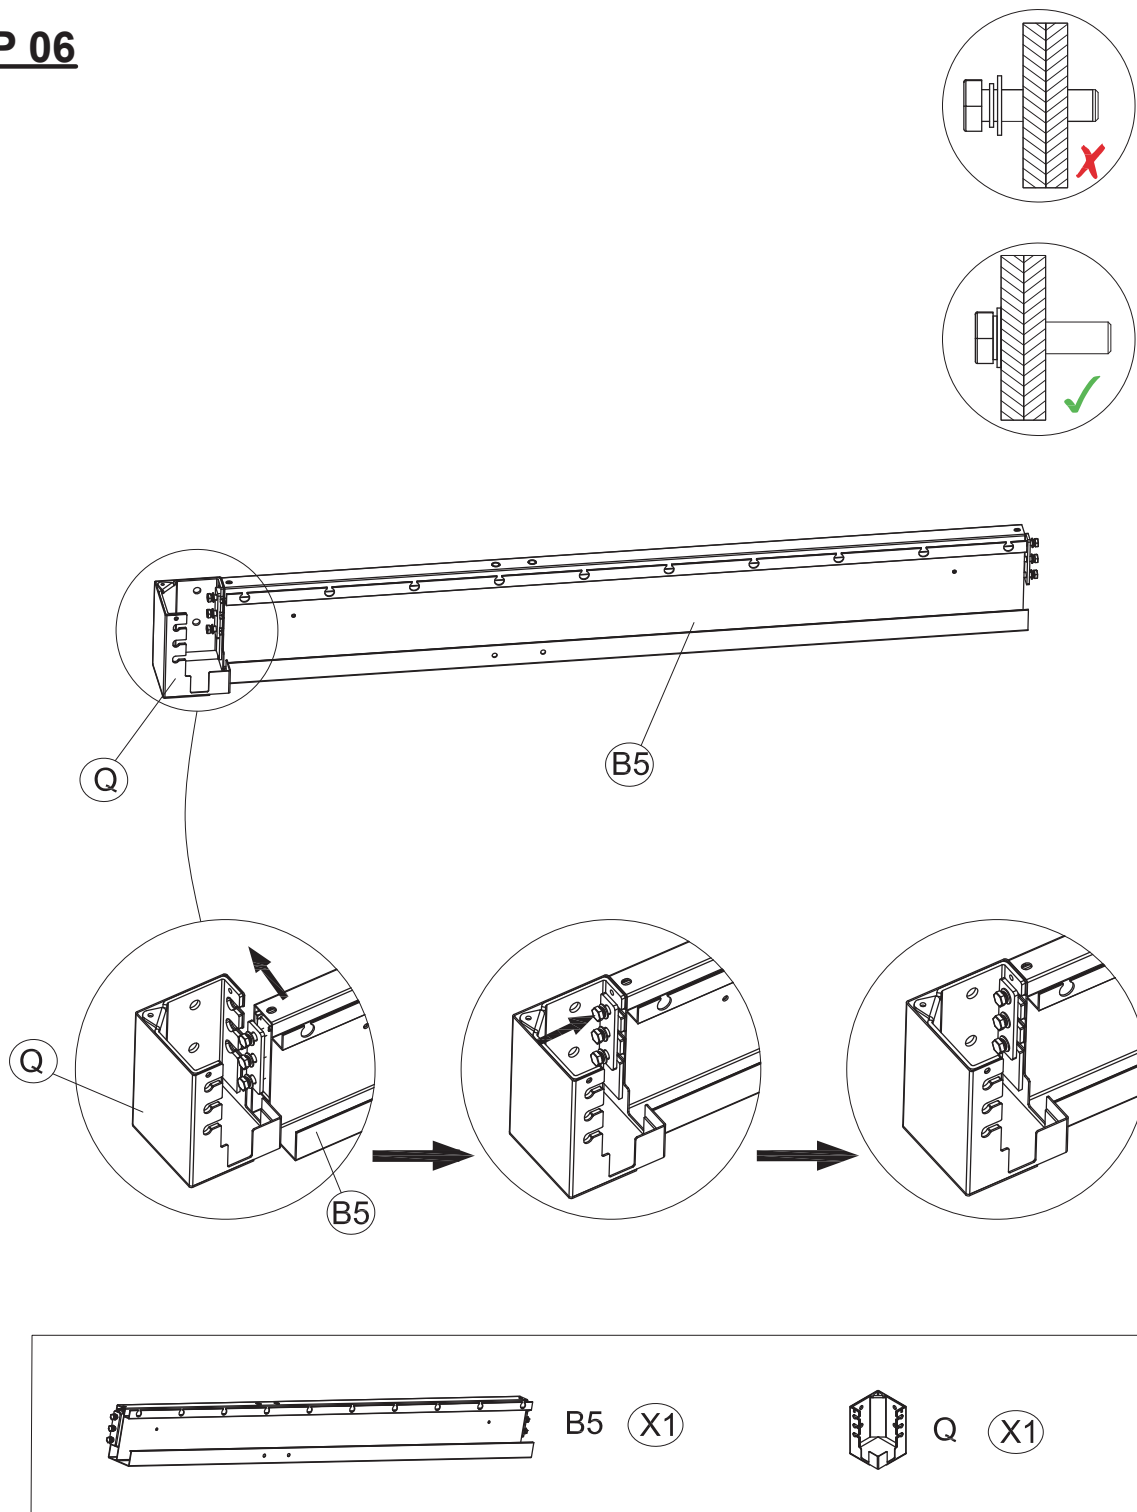

Connect the Beam Connector (Q) to the Left Beam Tube (B5) as shown. Ensure the connector is properly slotted into the beam, aligning securely. Tighten the screws, but leave them slightly loose for adjustments. Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 07

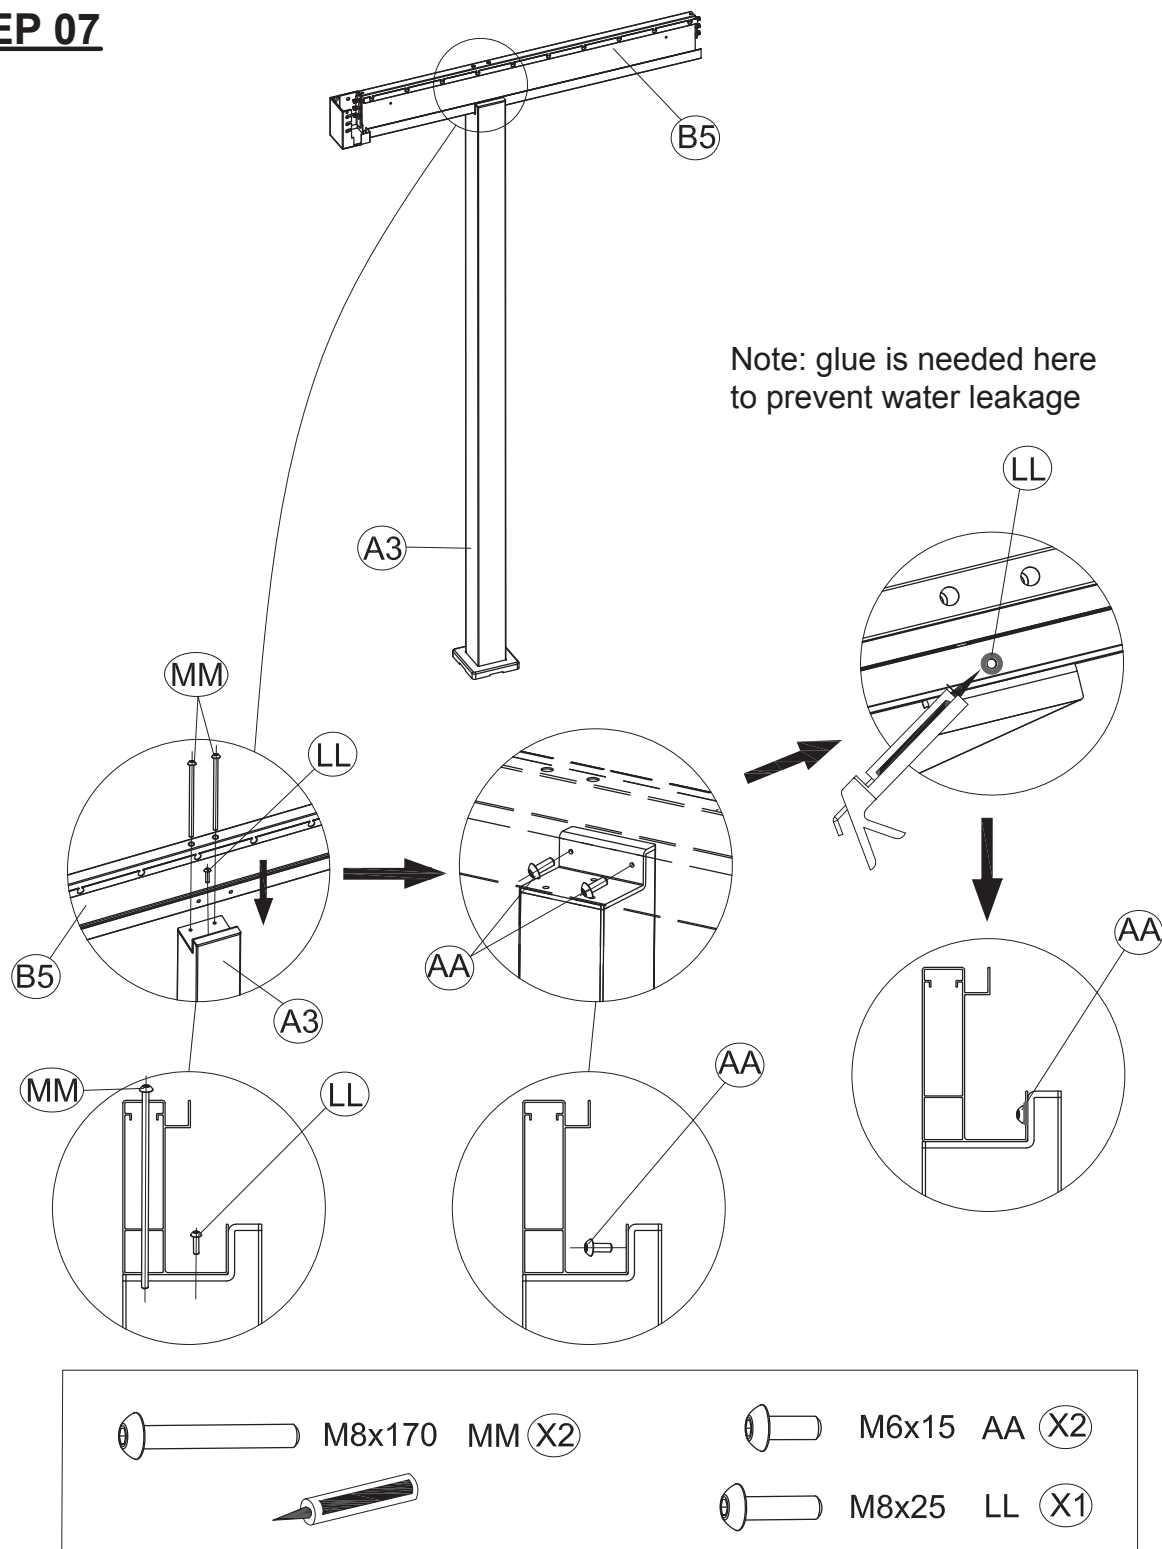

Connect the Left Beam Tube (B5) with Front Leg Tube (A3) as shown. Insert the screws (AA&LL&MM) into different screw holes as shown. Apply silicone neutral glass glue (not provided) along the screw (LL) as shown. Ensure an even application of the glue to prevent any potential leaks.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 08

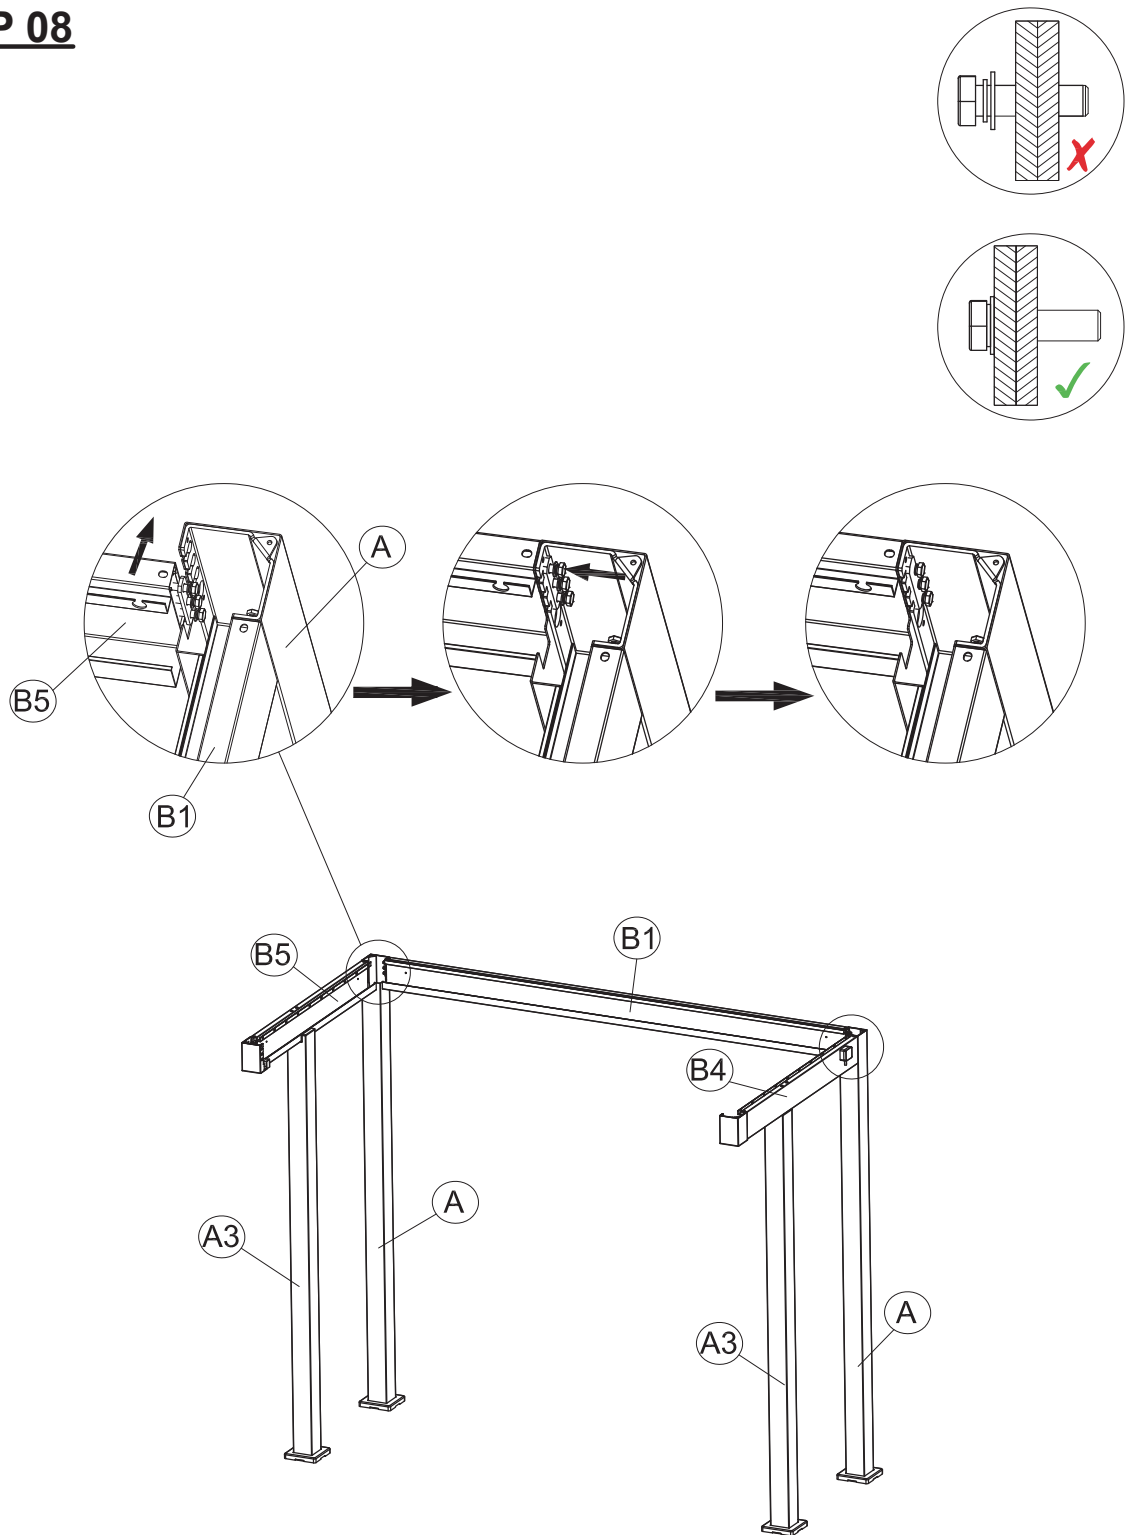

Connect the Leg Tube (A) and the Back Beam Tube (B1) to the Left Beam Tube (B5) and the Right Beam Tube (B4) as shown.
Ensure the connector is properly slotted into the beam, aligning the connectors securely.
Tighten the screws, but leave them slightly loose for adjustments.
Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 09

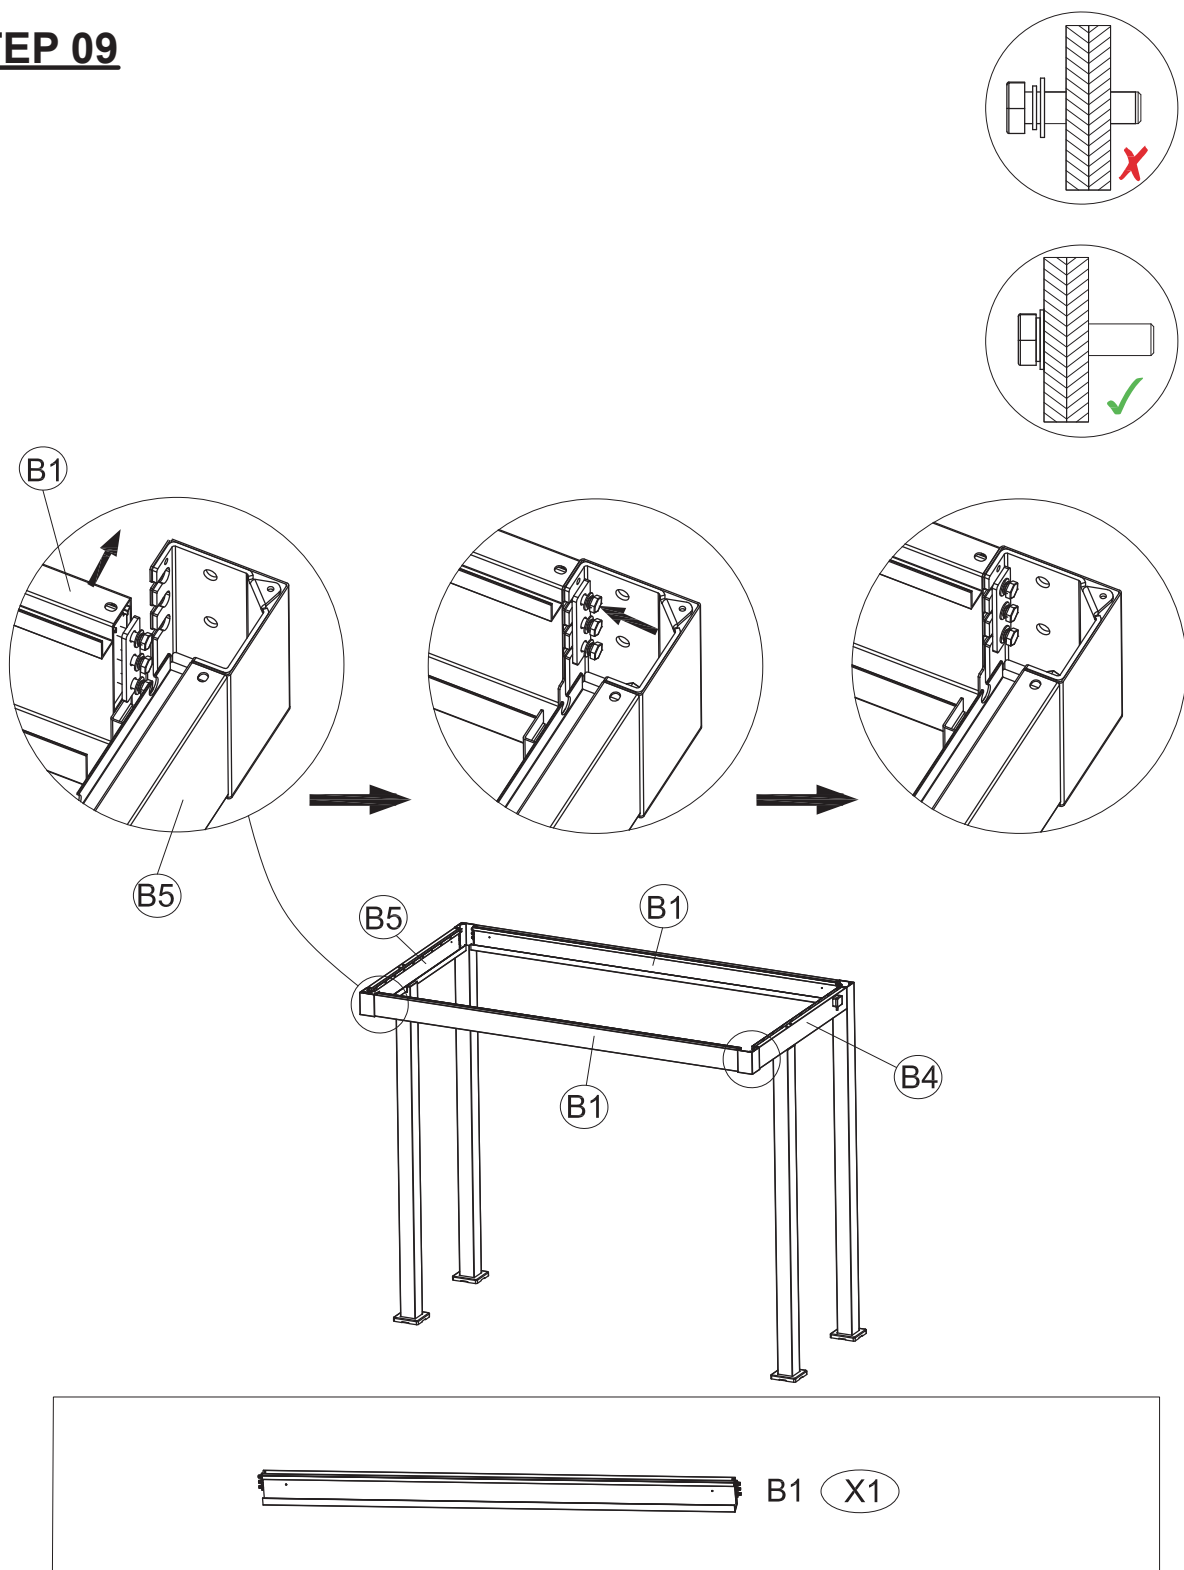



Connect another Back Beam Tube (B1) to the Left Beam Tube (B5) and the Right Beam Tube (B4) as shown.

Ensure the connector is properly slotted into the beam, aligning the connectors securely. Tighten the screws, but leave them slightly loose for adjustments.

Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 10

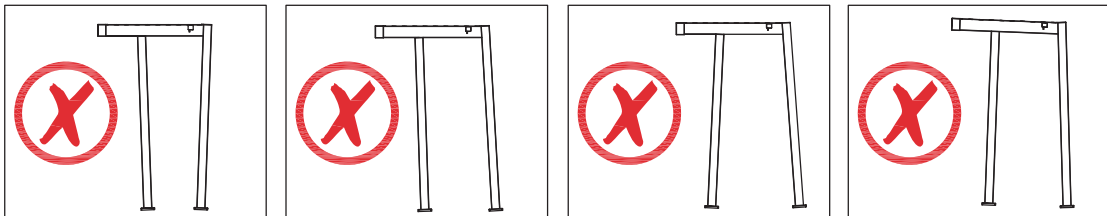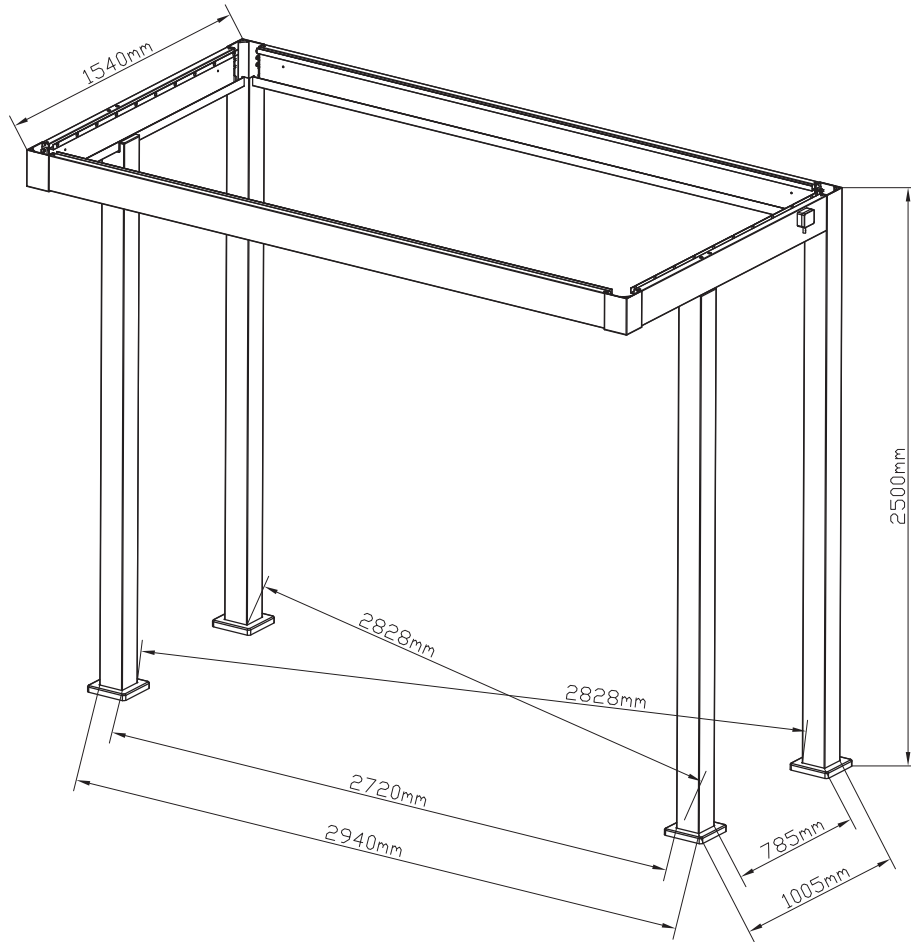

Verify that the structure is correctly positioned and aligned by measuring the distances between the legs:

Ensure the front and back width between the legs is 785 mm and 1540 mm between beam tubes.

Ensure the side-to-side length is 2828 mm on the diagonal and 2720 mm on the left and right. The height should be 2500 mm as indicated.


Make sure the structure is rectangular and the legs are vertical.

Avoid any tilting as shown in the diagrams with red Xs.

Adjust the positioning as necessary to achieve correct measurements and alignment before tightening all screws.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 11

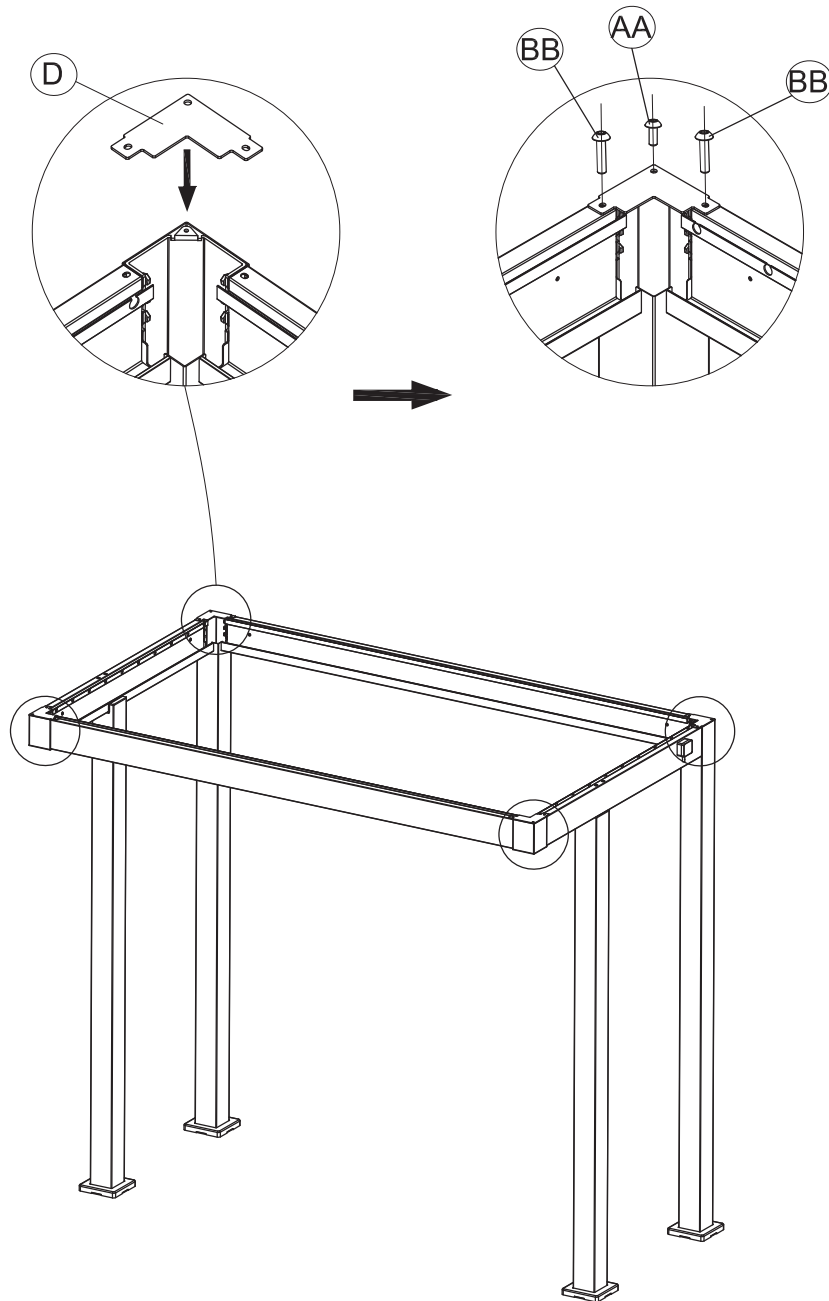

Attach the Cover for Leg Tube (D) to each corner of the structure, placing one cover on each corner.


Use the M6*15 Screws (AA) to secure the cover to the frame.

Then, insert the M6*25 Screws (BB) to further secure the corner covers.

Ensure all screws are tightened securely after installation.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 12

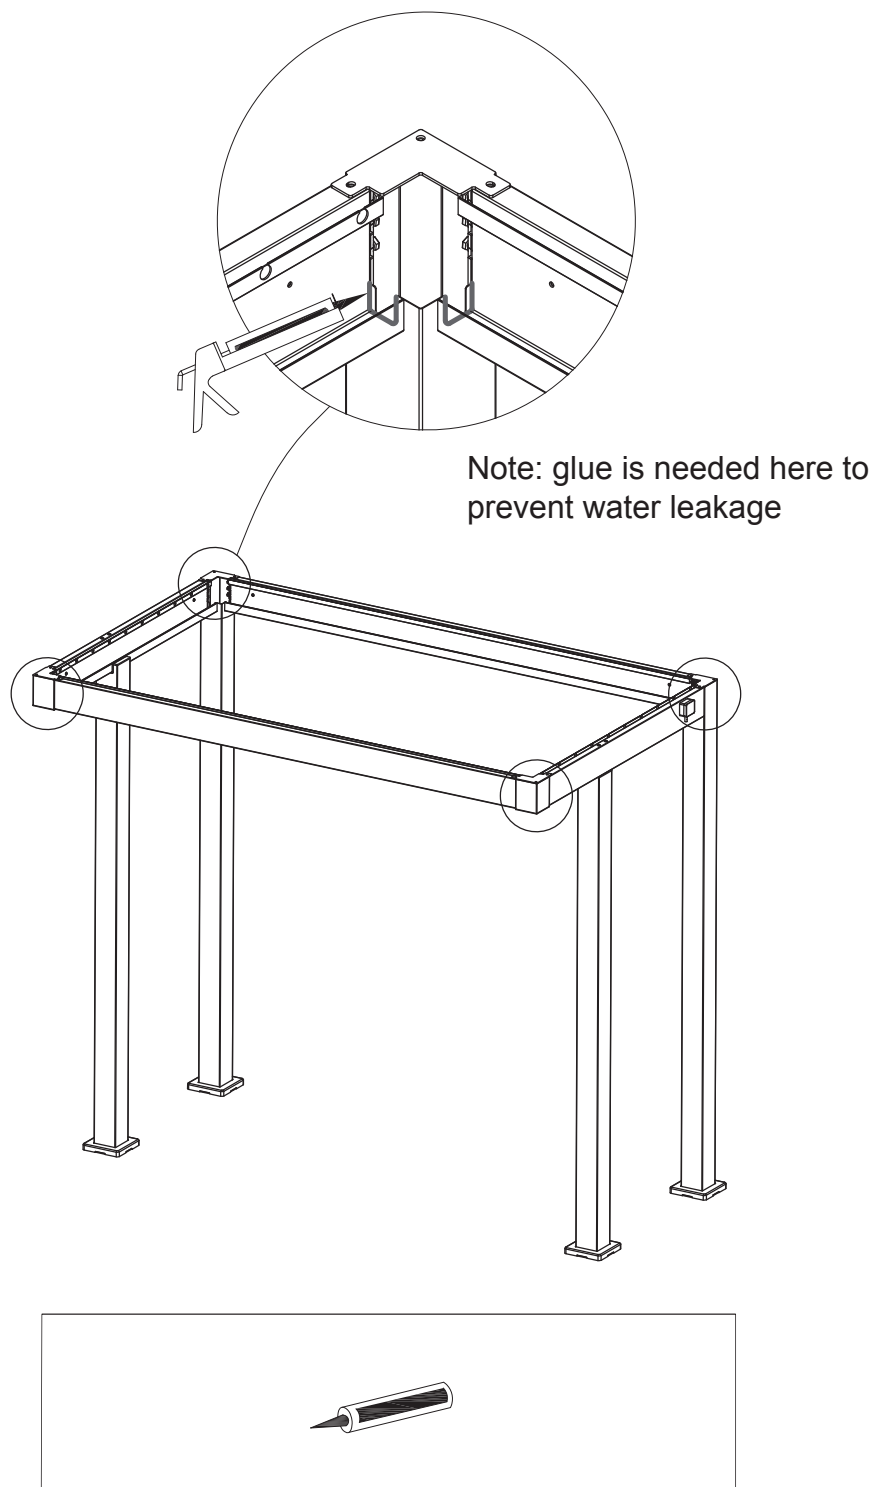

Apply silicone neutral glass glue (not provided) along the indicated seams in the corner joints as shown in the diagram.
Ensure an even application of the glue to prevent any potential leaks at the joint points.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 13

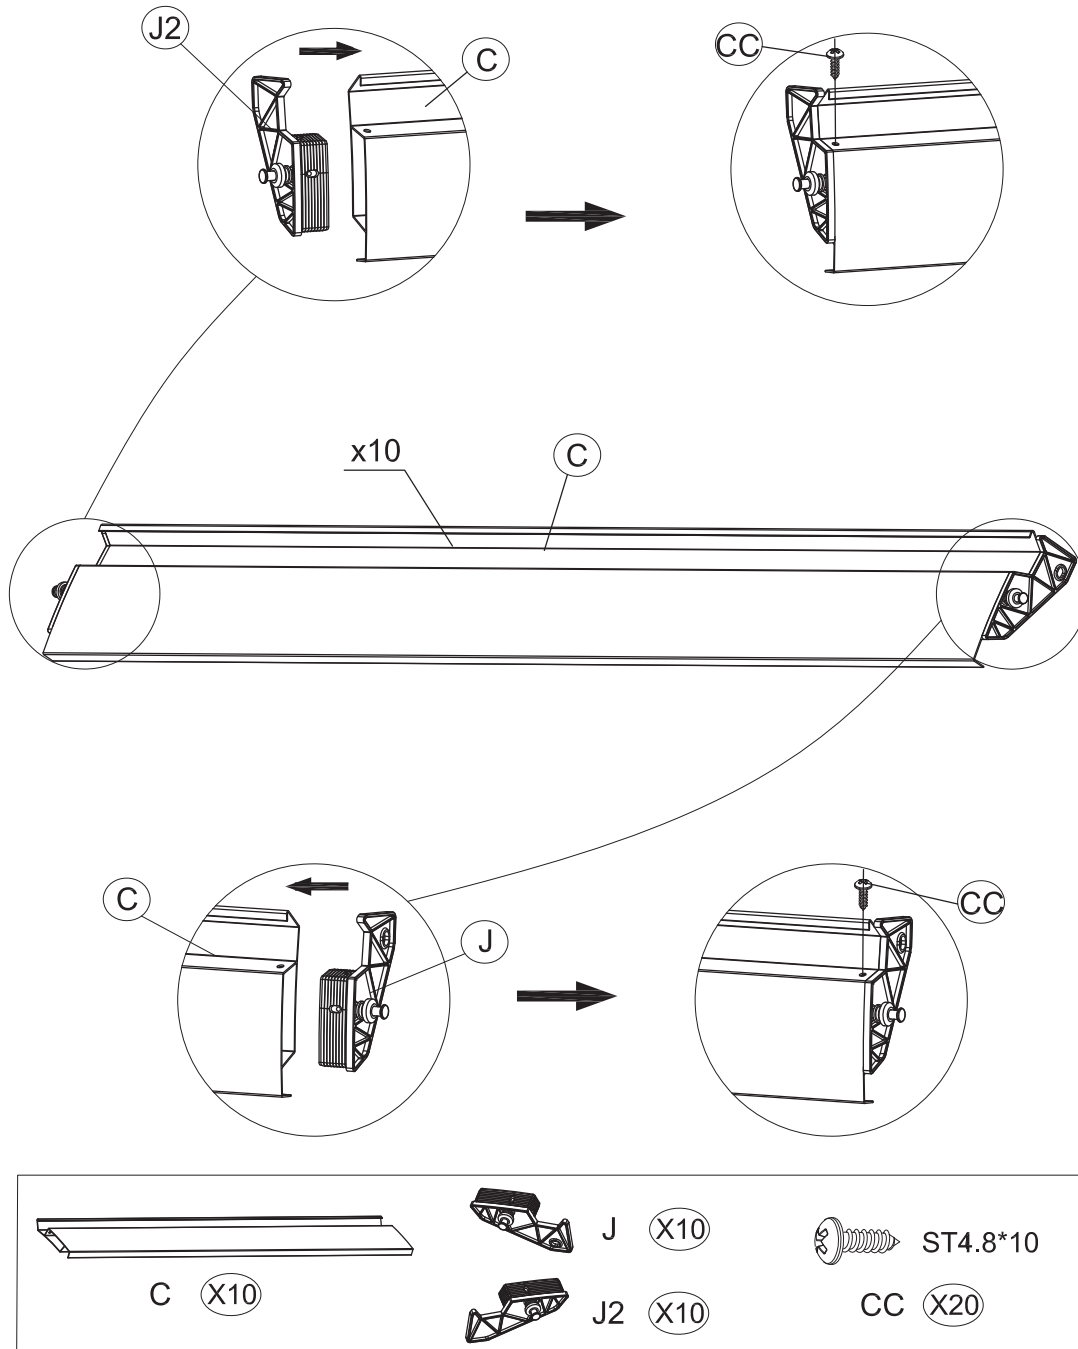

Attach the brackets (J2) and (J) to the Louvre (C) on both sides of the frame as shown in the diagram.

Insert the Louvre Cap without Hole (J2) into one side and the Louvre Cap with Hole (J) into the other side for each louvre.


Use the ST4.8*10 Screws (CC) to secure the louvres in place, with 2 screws per louvre.

Repeat the process for all 10 louvres (C).

Ensure the ends of louvres with Right Louvre Cap (J) are placed in the same direction, different from the ends of louvres with Left Louvre Cap (J2), to prepare for the subsequent steps.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 14

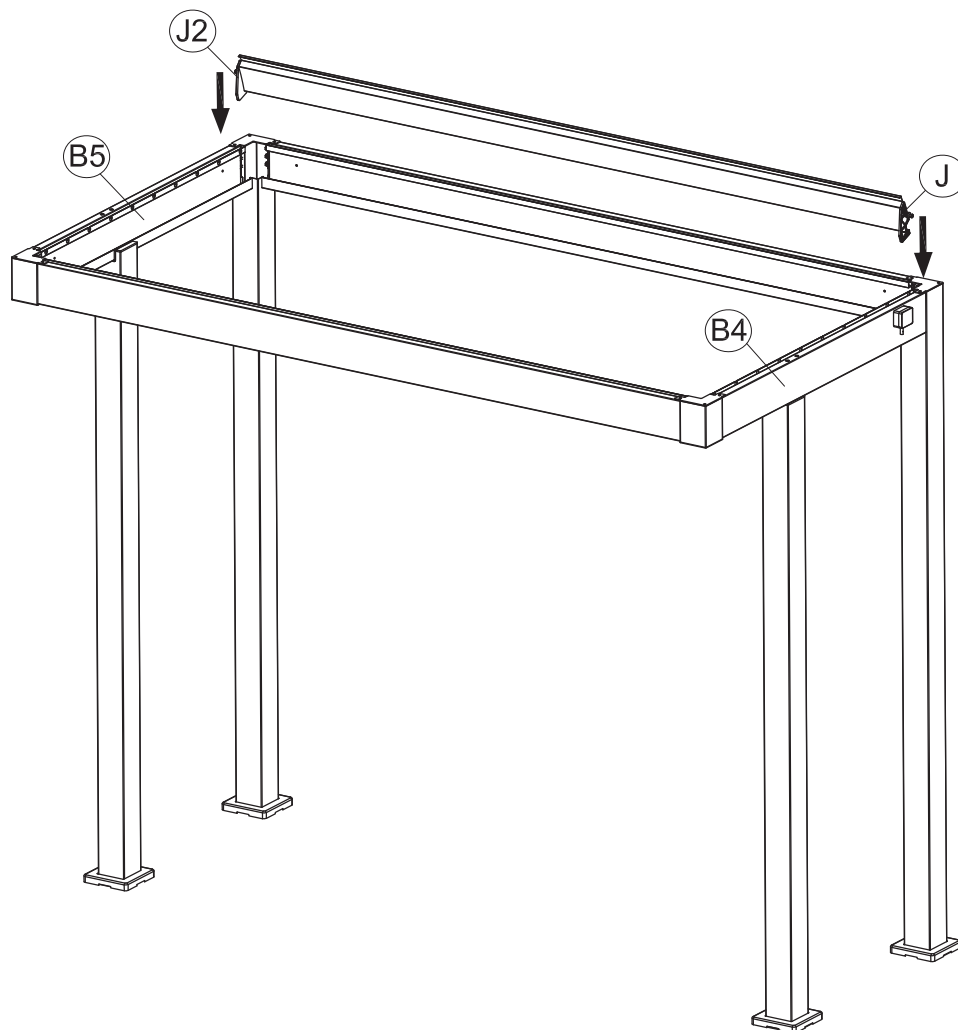

Position the Louvres (C) above the Right Beam Tube (B4) and Left Beam Tube (B5) as shown. Ensure the ends of louvres with Right Louvre Cap (J) are position on the Right Beam Tube (B4), the ends of louvres with Left Louvre Cap (J2) are position on the Left Beam Tube (B5). Ensure the louvres are correctly aligned with the frame.
Gently lower the louvres into place, securing them on both sides using the designated slots on the beams.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 15

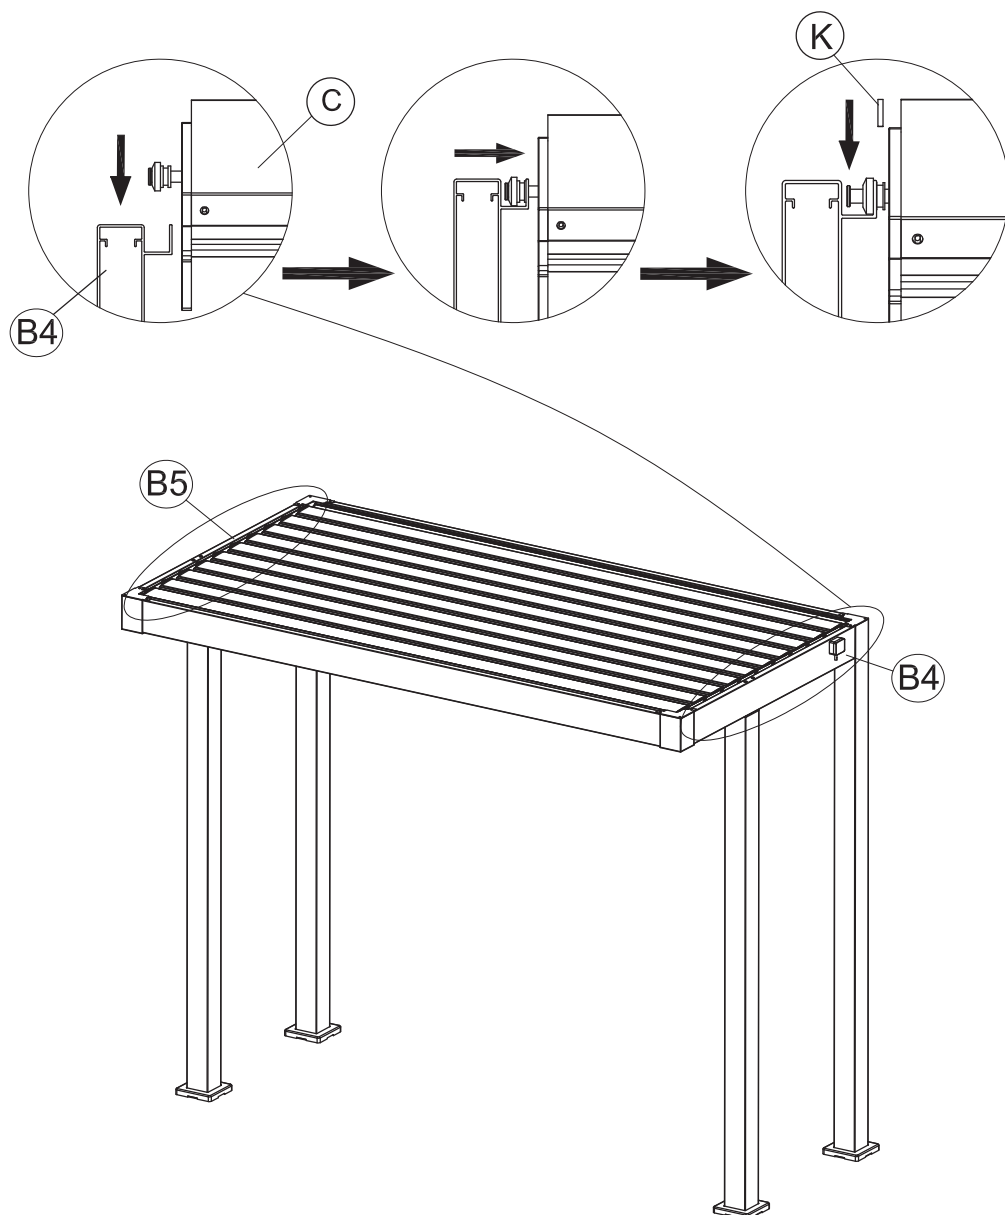

Insert all Louvres (C) between Right Beam Tube (B4) and Left Beam Tube (B5) and secure it as shown.
Attach the Cap (K) on both sides of the louvre.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.



STEP 16

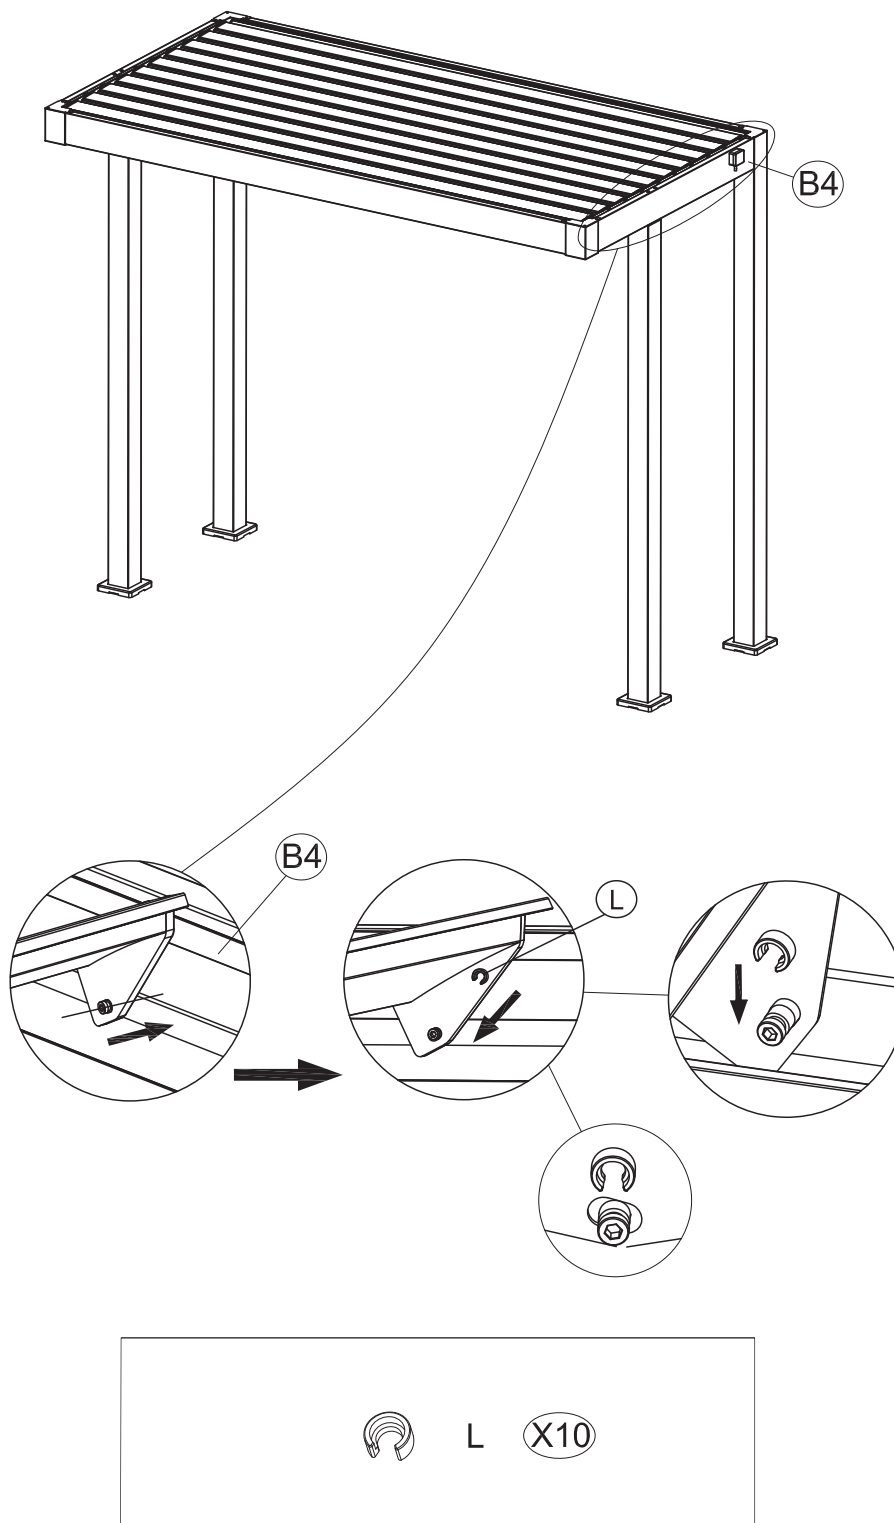

Install the Part L locks on the Right Beam Tube (B4) as indicated in the diagram, making sure the opening direction is correct. Tighten all the components securely.


PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 17

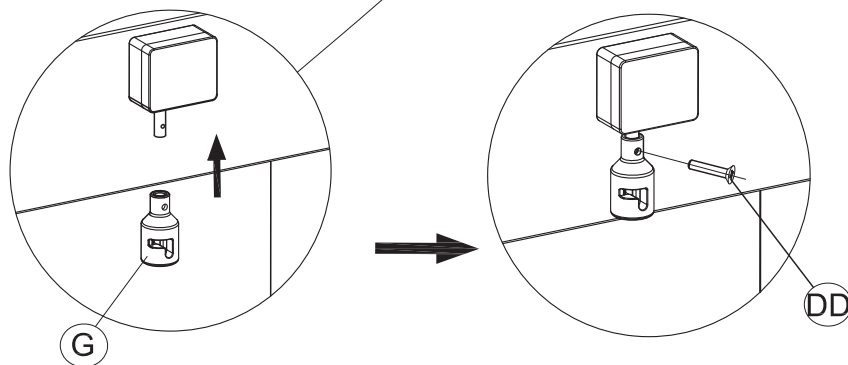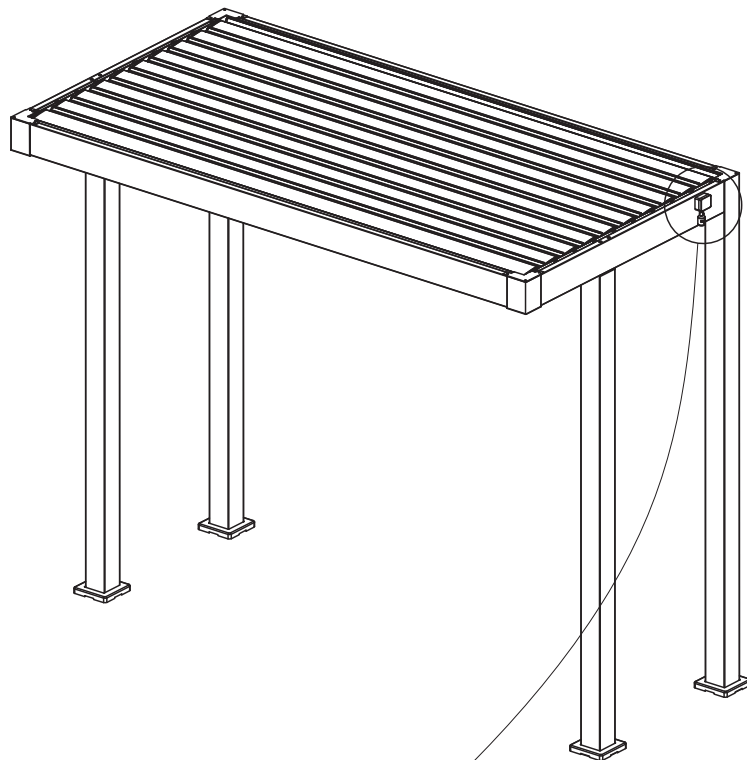

G

(X1)




M5*18 DD

(X1)

Attach Turbo Motor (G) to the designated area on the structure as shown.
Secure the motor using the M5*18 Screw (DD).
Ensure the motor is properly fastened and aligned for smooth operation.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 18

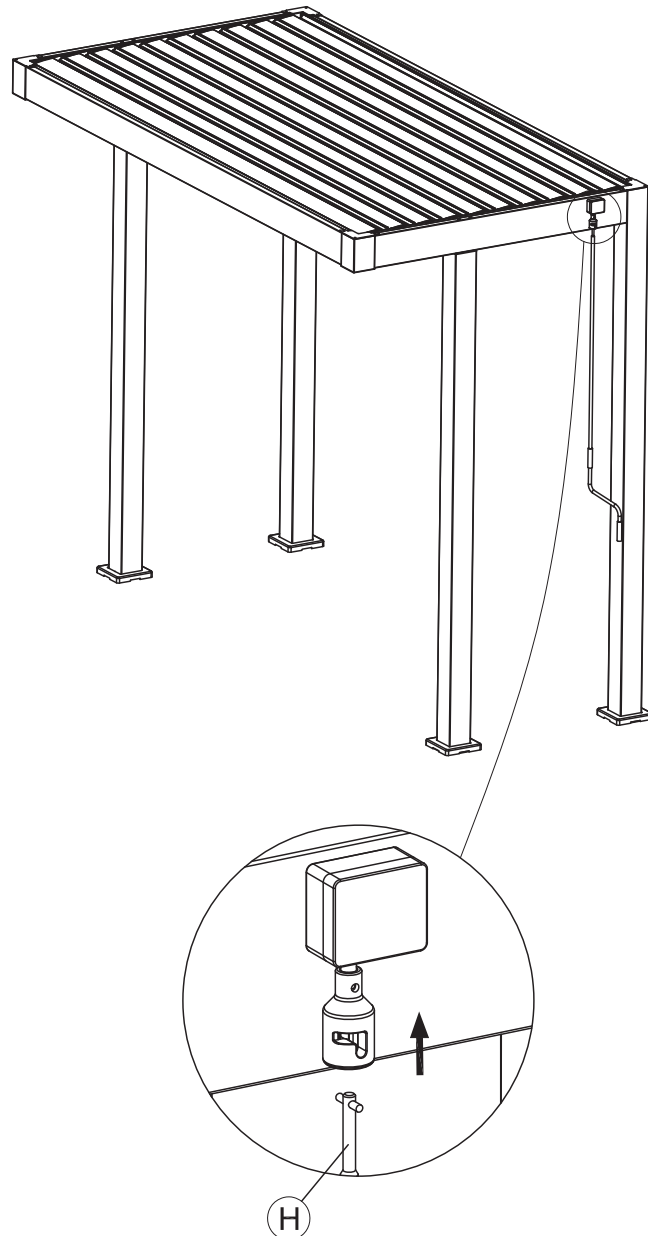

Insert the Rocker Handle (H) into the Turbo Motor as shown.
Ensure the handle is securely in place and properly aligned for smooth manual operation of the louvre system.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 19

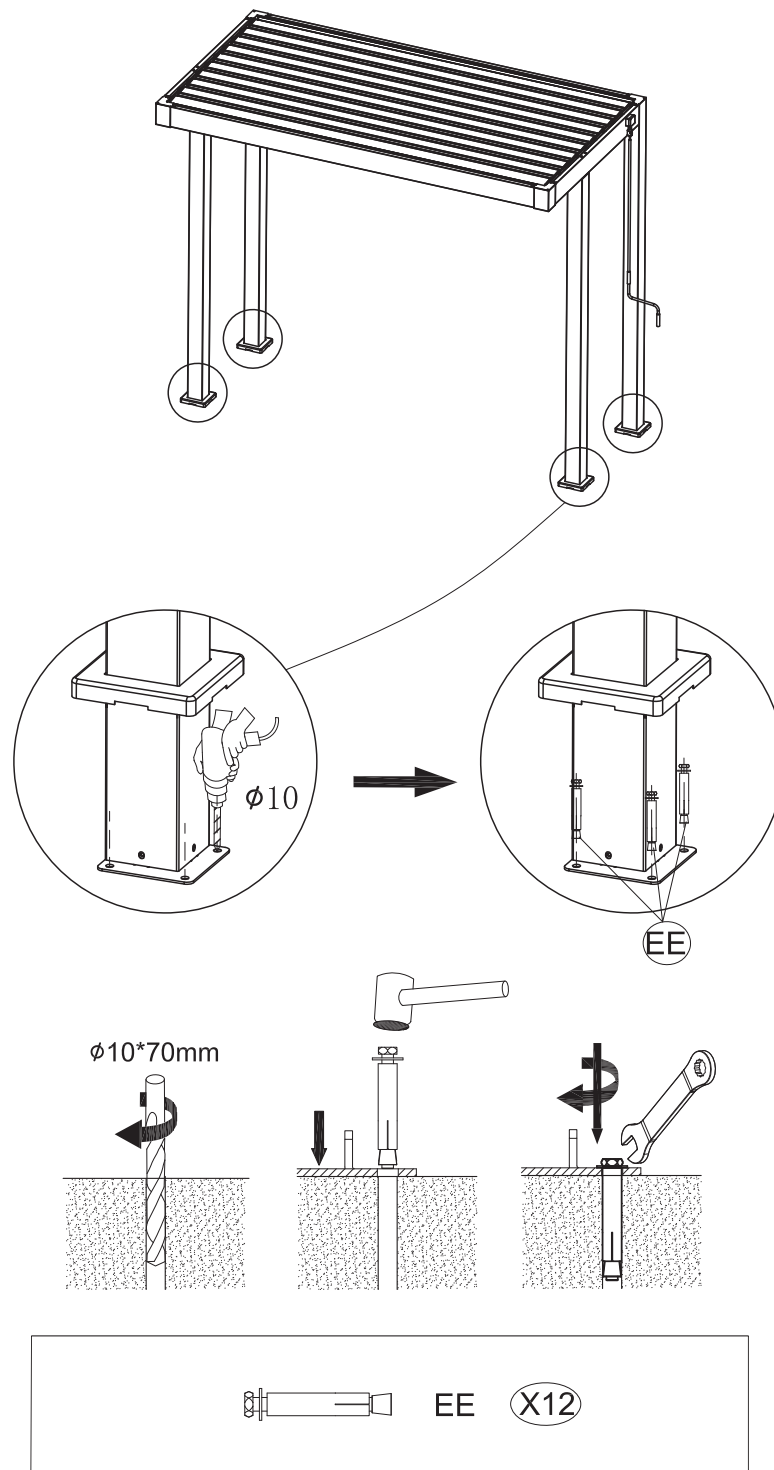

Drill holes into the ground using a 10 mm drill bit to a depth of 70 mm at the locations where the legs will be anchored.

Align the holes in the footplates of the structure's legs with the drilled holes in the ground.



Insert the Expansion Screws (EE) into the drilled holes.

Use a hammer to tap the screws into place, and then tighten the screws with a wrench to securely anchor the structure.


PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

Important Notes

1. During the snowy season or when snow is forecasted, open the louvres to keep them vertical to avoid any damage to the pergola. If there are any debris or leaves on the top shutter, please take care to clear them in time to prevent the shutter from closing poorly or even failing to close.
2. When opening/closing the louvres, please make sure the rocker stays in a vertical position next to the post, and do not move the rocker too far away from the pole.

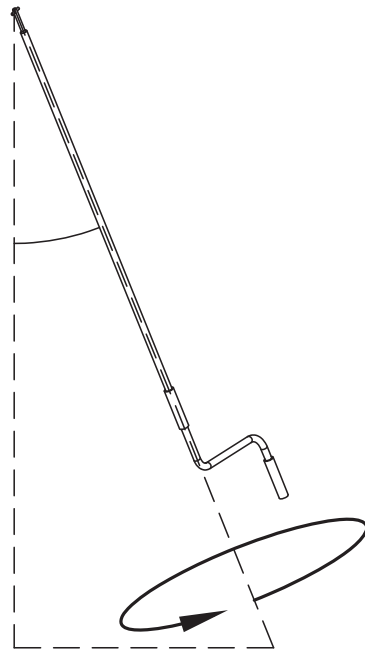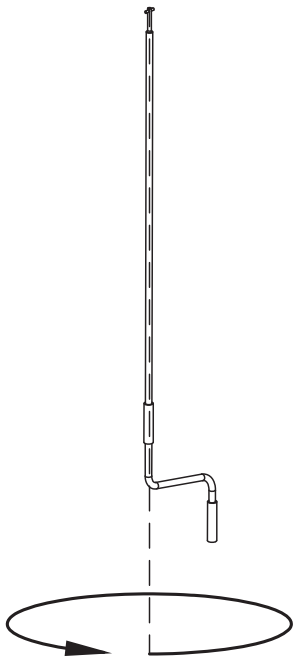


3. To open the louvre, turn the rocker handle clockwise; to close the louvre, turn the rocker handle anti-clockwise.

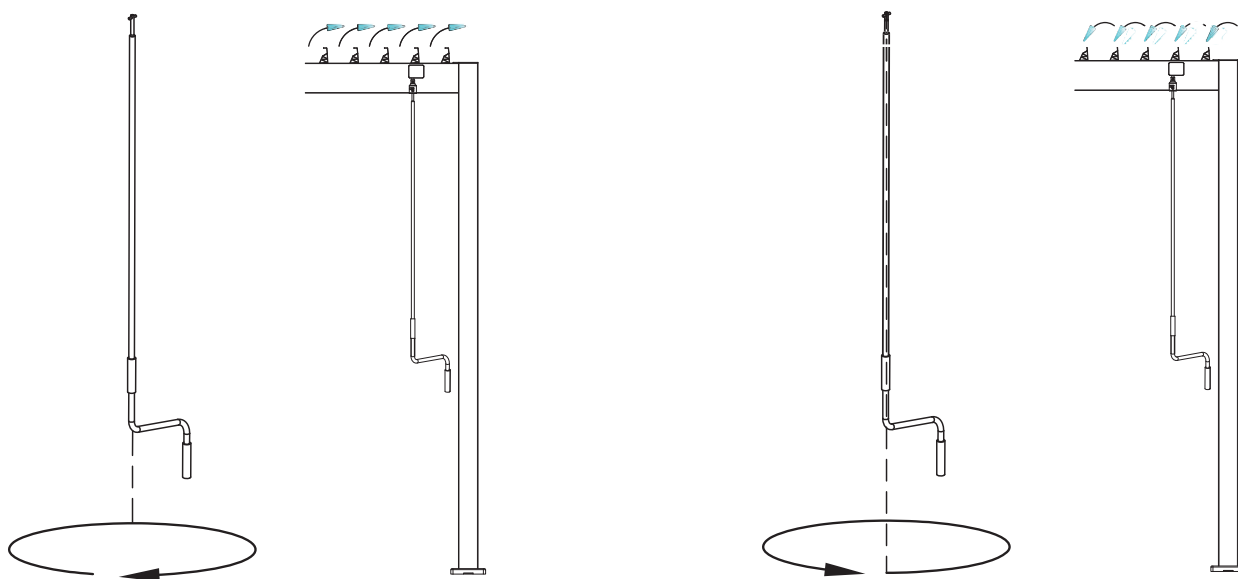

Below are steps to assemble BBQ Gazebo and 3 x 3 m Gazebo together.

STEP 20

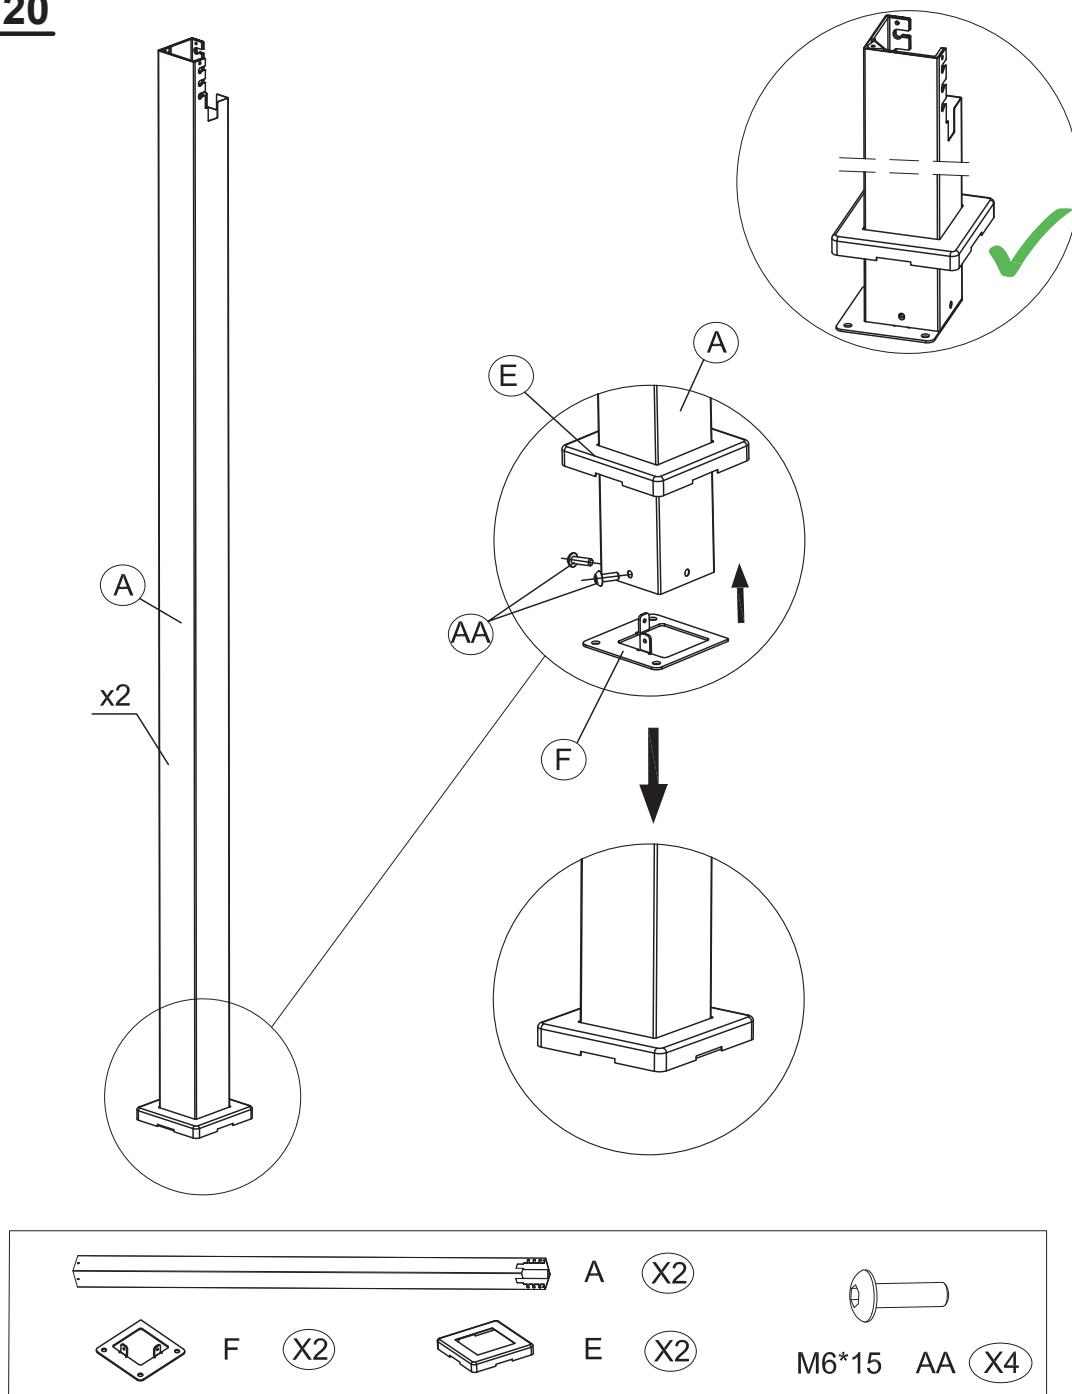

Slide the Footplate Cover 1 (E) over the base of Leg Tube 1 (A).

Place the Footplate (F) right under the Leg Tube 1 (A).

Ensure the directions of the Footplate (F) and the Leg Tube 1 (A) are the same as shown.



Use the M6*15 Screws (AA) to secure the footplate and cover to the leg.

Insert 2 screws into each leg.

Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.



STEP 21

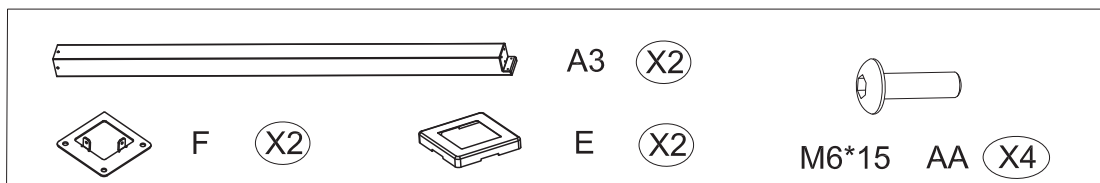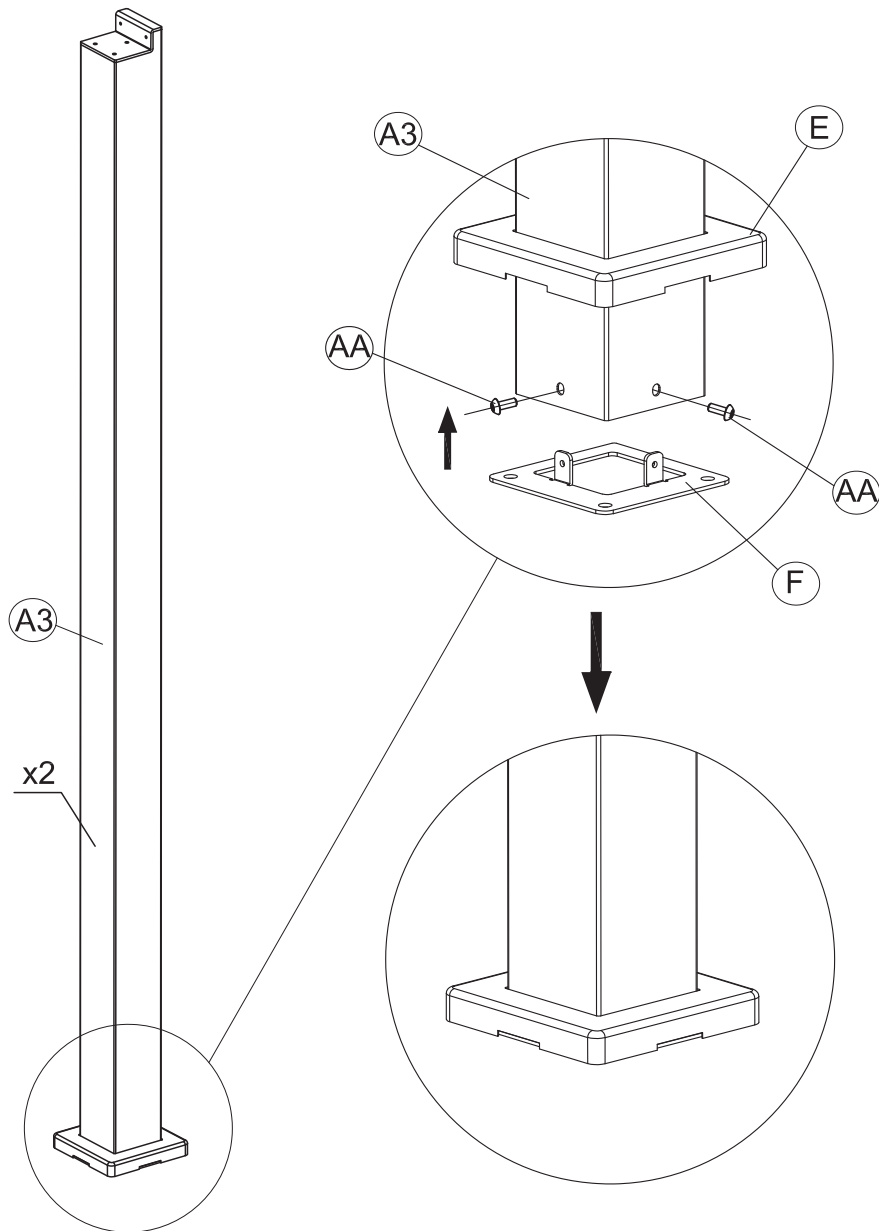

Slide the Footplate Cover 1 (E) over the base of Front Leg Tube (A3).
Place the Footplate (F) right under the Front Leg Tube (A3).
Use the M6*15 Screws (AA) to secure the footplate and cover to the leg.
Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.



STEP 22

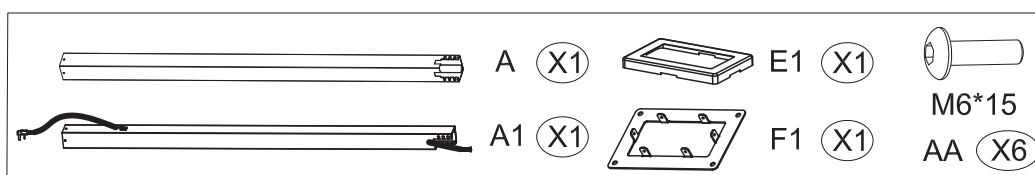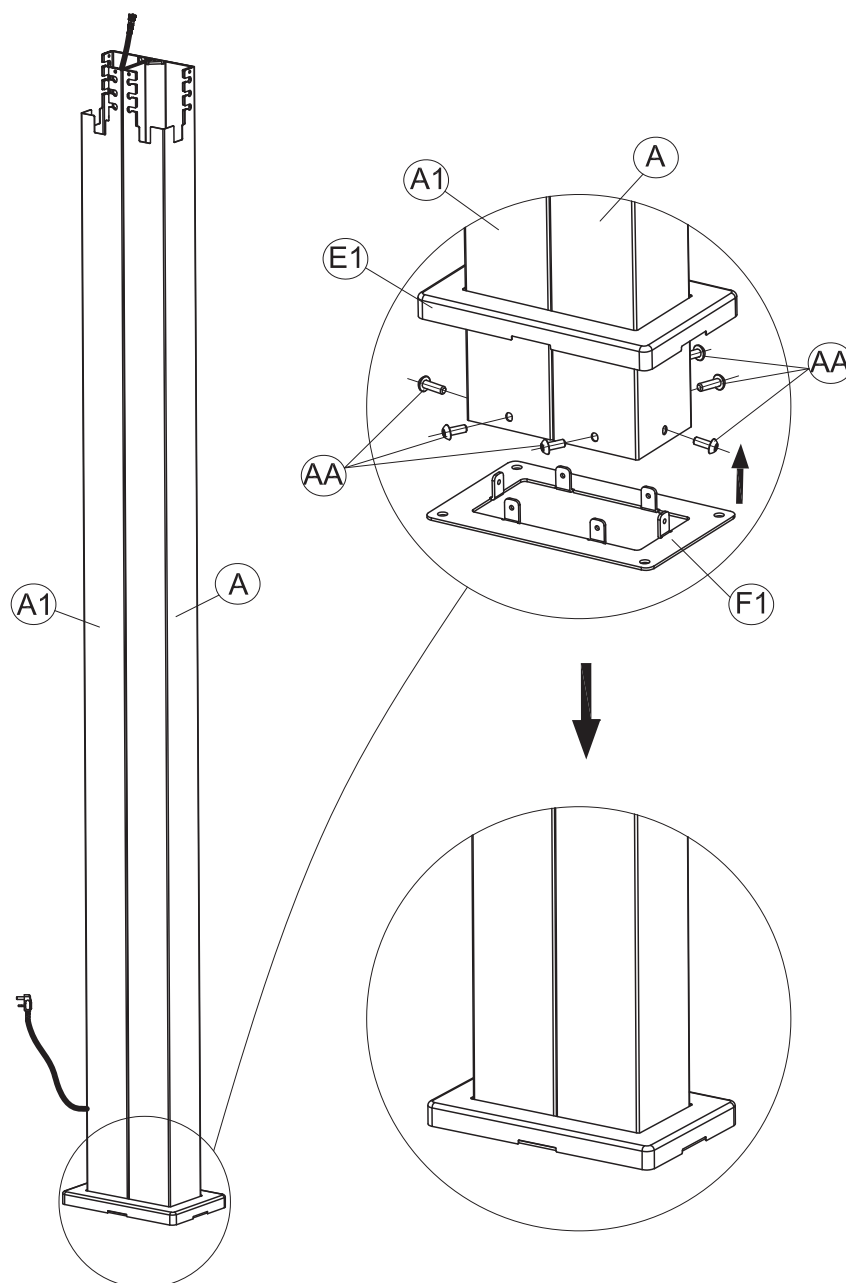

Align the Leg Tube (A) and the Leg Tube 1 (A1) together.
 Slide the Footplate Cover 2 (E1) over the base of two Leg Tubes (A&A1).
 Place the Footplate 2 (F1) right under two Leg Tubes (A&A1).
 Use the M6*15 Screws (AA) to secure the footplate and cover to the leg.
 Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 23

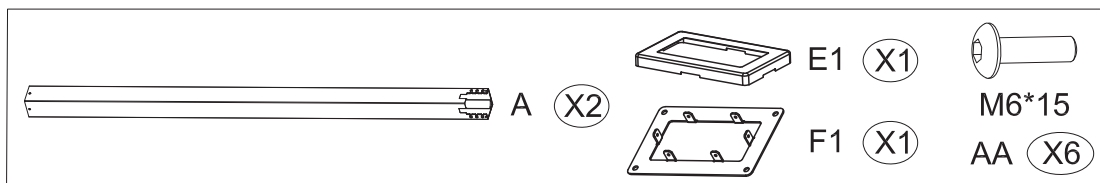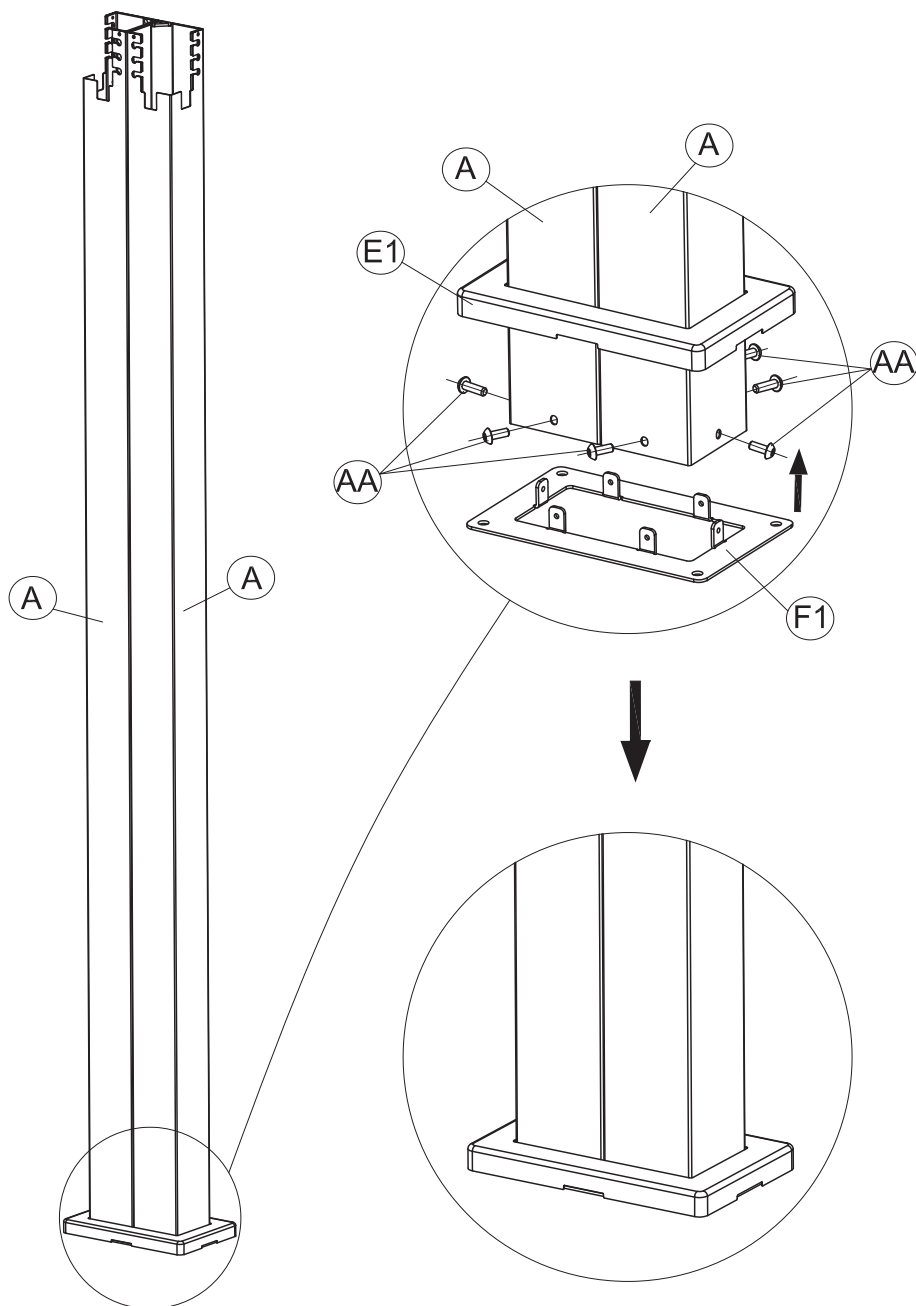

Align two Leg Tubes (A) together.

Slide the Footplate Cover 2 (E1) over the base of two Leg Tubes (A).


Place the Footplate 2 (F1) right under two Leg Tubes (A).

Use the M6*15 Screws (AA) to secure the footplate and cover to the leg.

Leave screws loose for now; tighten later.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 24

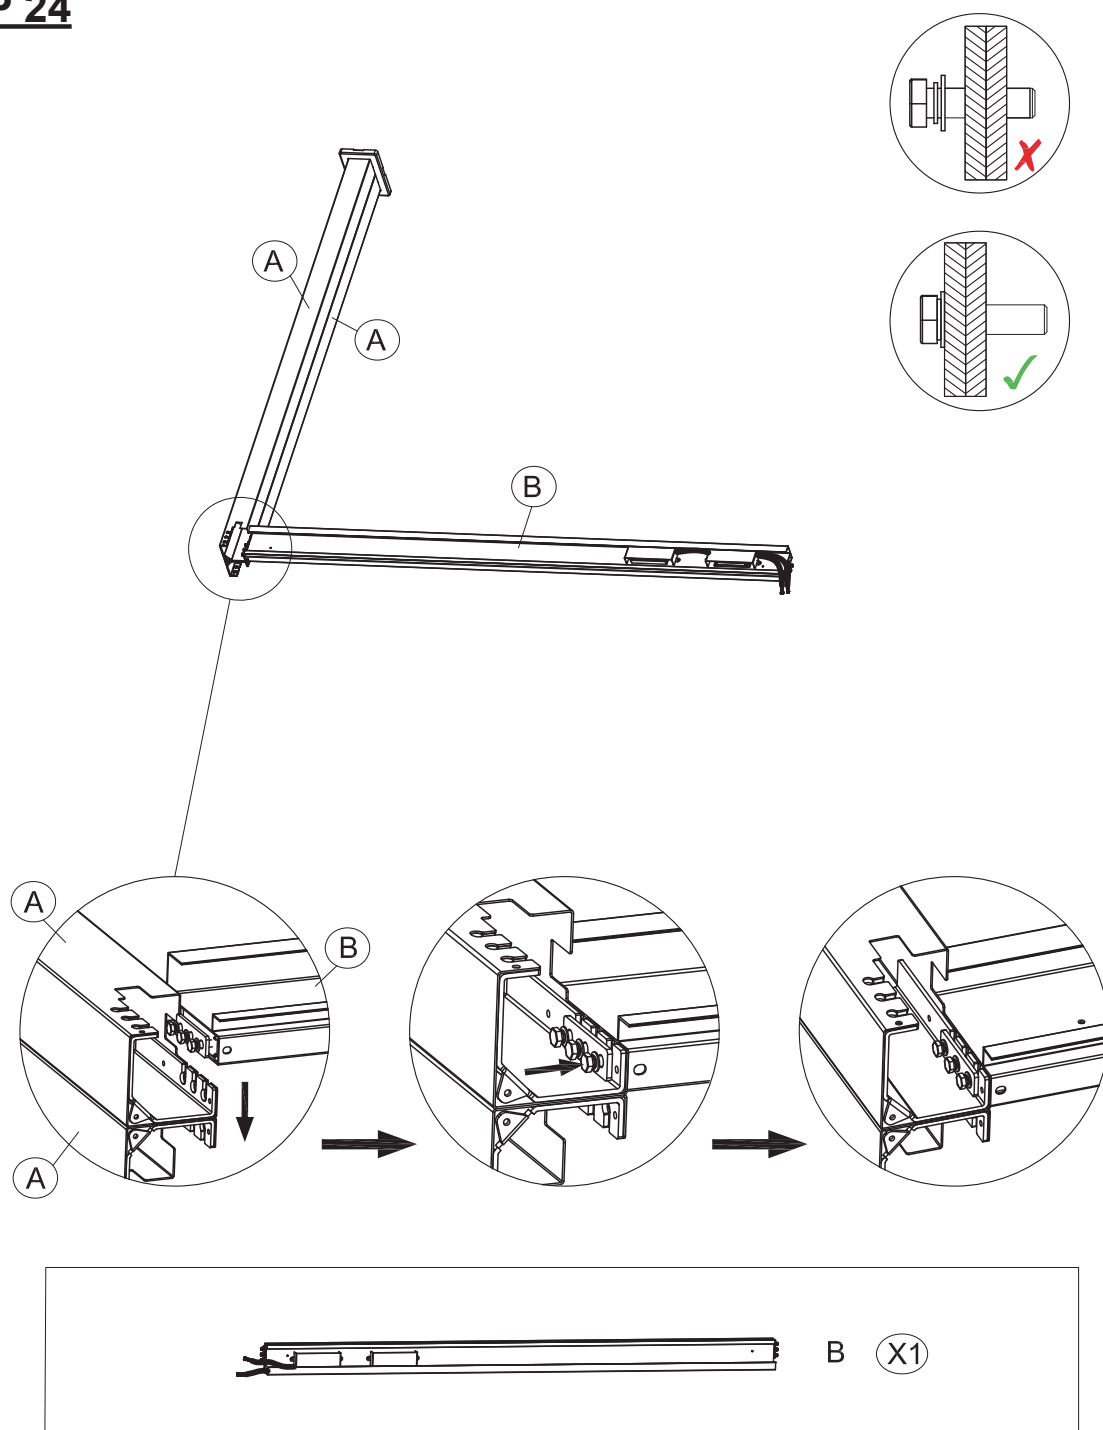

Connect the Front Beam Tube (B) to Leg Tube 1 (A) as shown.
Ensure the beam is properly slotted into the leg, aligning the connectors securely.
Tighten the screws, but leave them slightly loose for adjustments.
Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 25

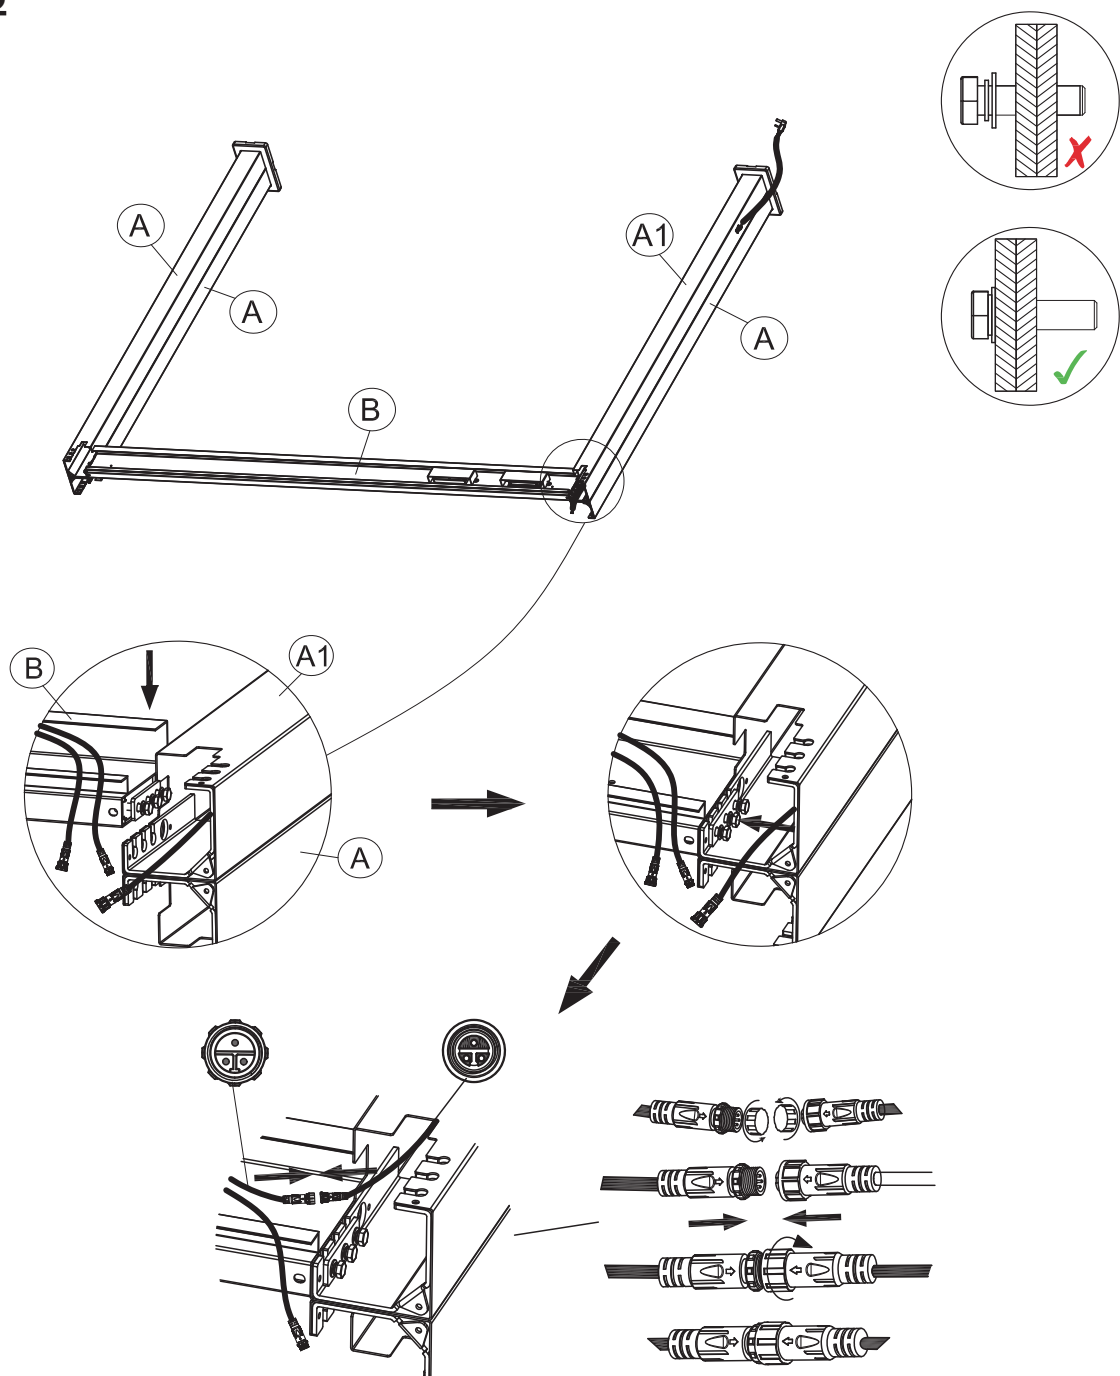

Connect the Front Beam Tube (B) to Leg Tube1 (A) and Leg Tube 2 (A1).


Align the connectors as shown in the diagram, ensuring the wiring from Leg Tube 2 (A1) is properly positioned.

Insert the screws into the beam connection points, but leave them loose for adjustments. Connect the light wiring by following the diagram. Ensure each connector is fully plugged in and secured.

Double-check the screw orientation as shown in the diagram to avoid improper fastening.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 26

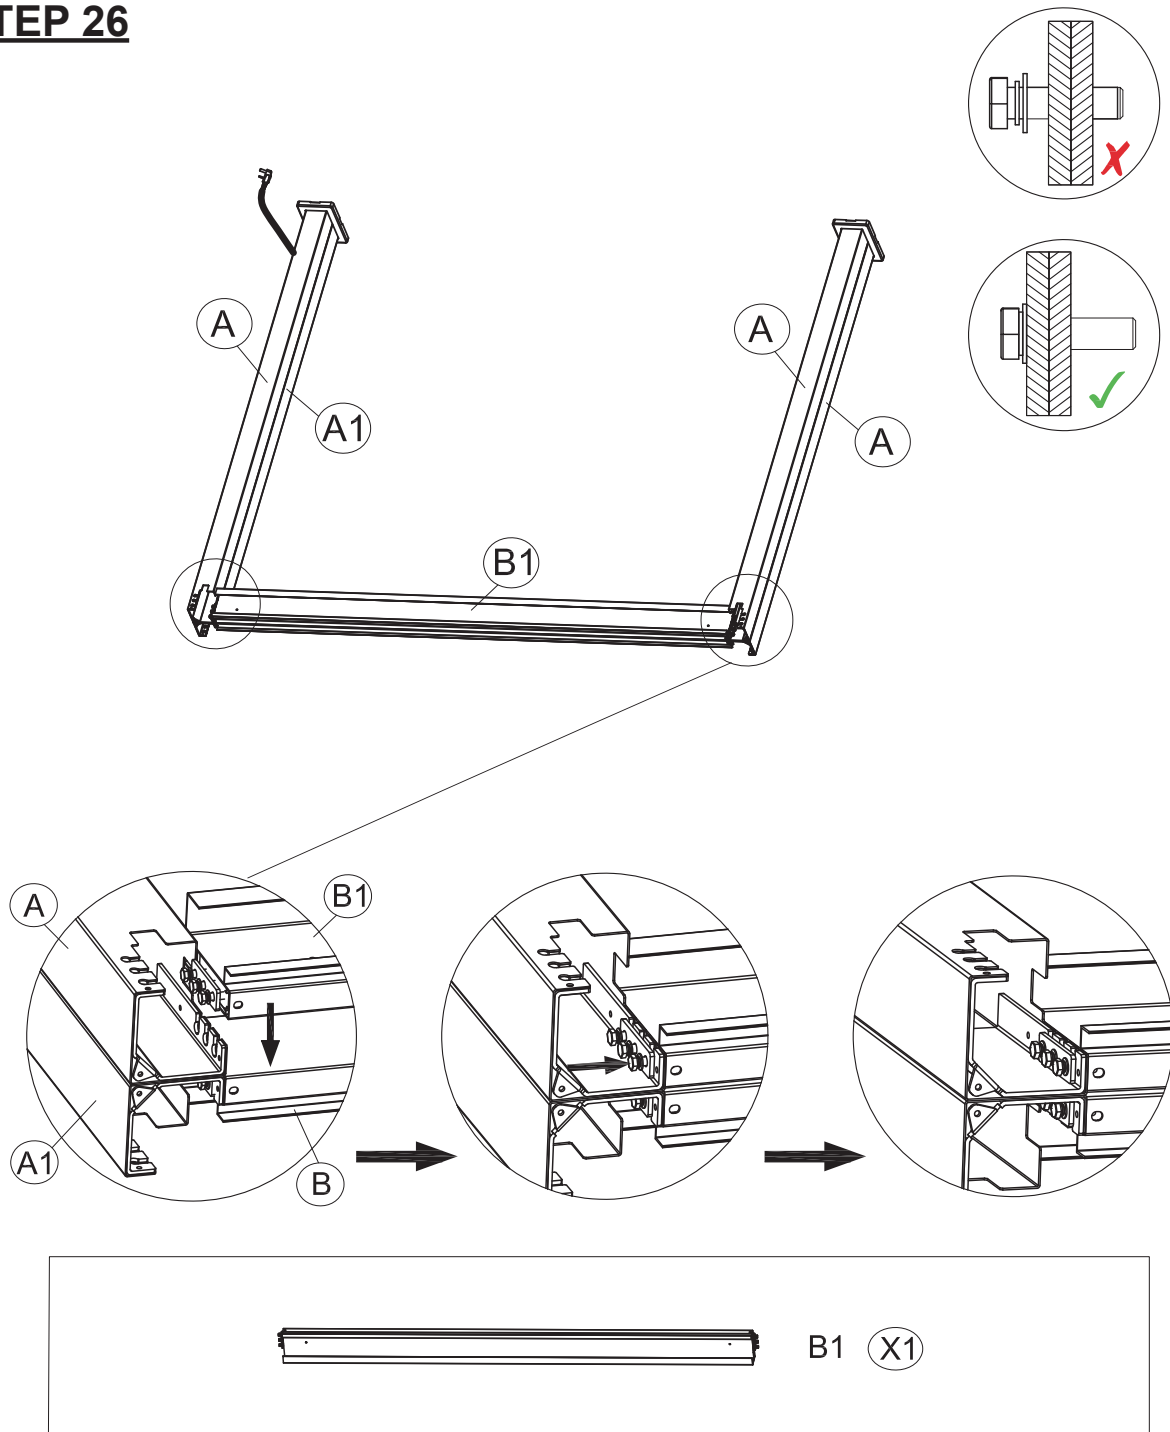

Connect the Front Beam Tube (B1) to Leg Tube1 (A) and Leg Tube 2 (A1).


Align the connectors as shown in the diagram, ensuring the wiring from Leg Tube 2 (A1) is properly positioned.

Insert the screws into the beam connection points, but leave them loose for adjustments. Connect the light wiring by following the diagram. Ensure each connector is fully plugged in and secured.

Double-check the screw orientation as shown in the diagram to avoid improper fastening.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 27

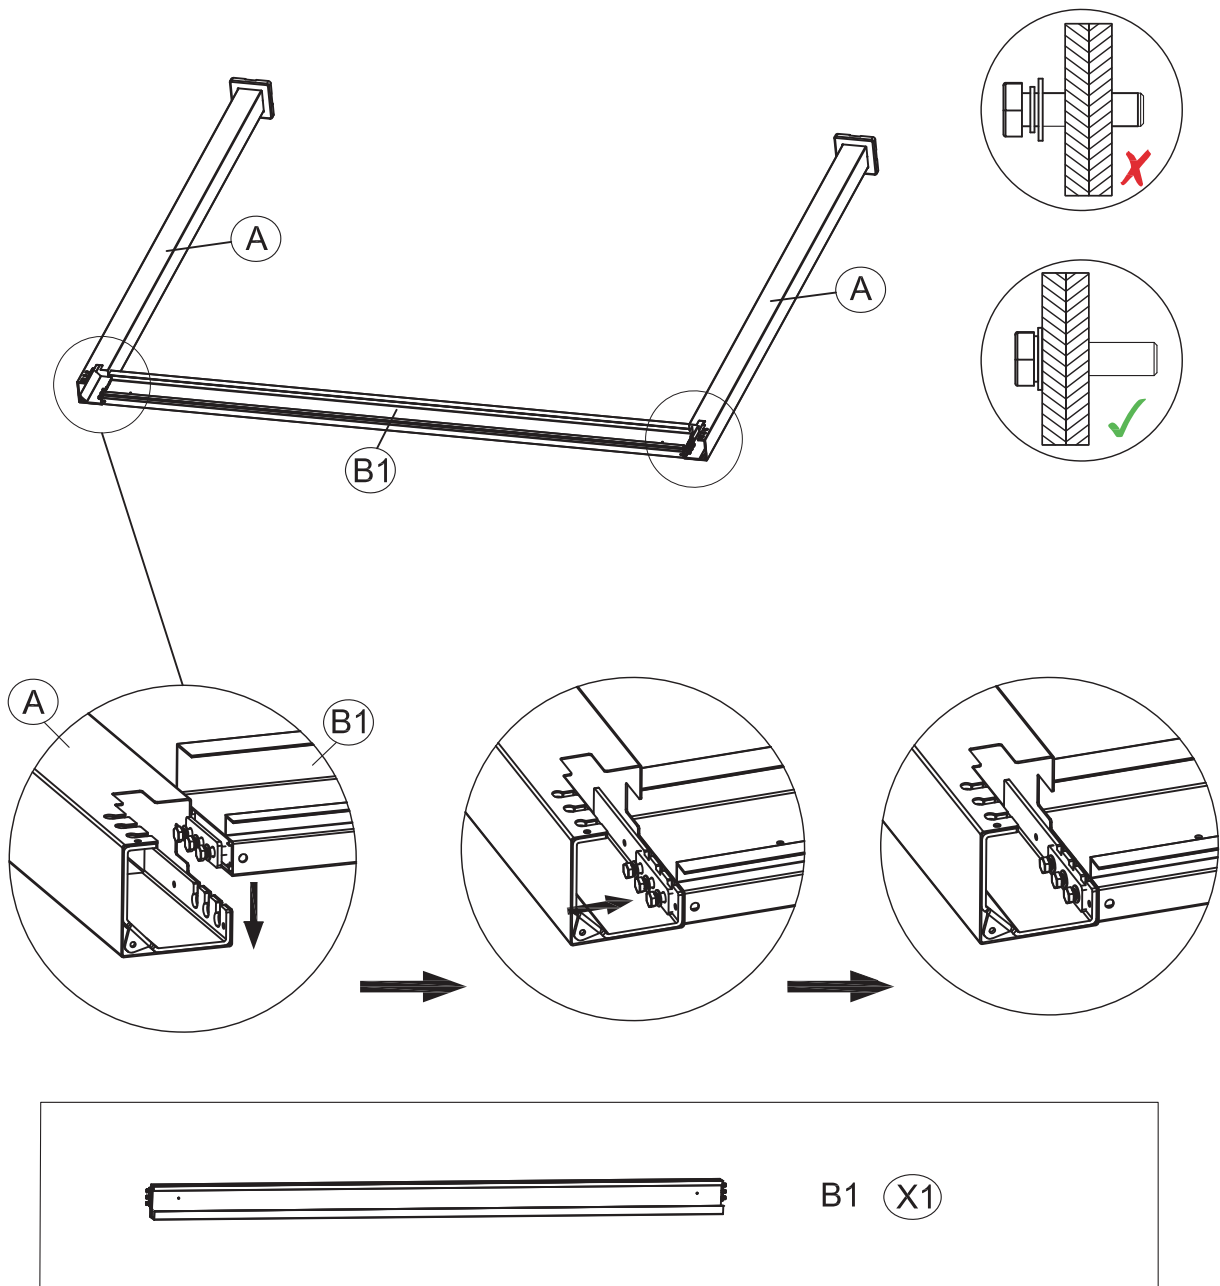

Connect the Front Beam Tube (B1) to Leg Tube 1 (A) as shown. Ensure the beam is properly slotted into the leg, aligning the connectors securely. Tighten the screws, but leave them slightly loose for adjustments. Ensure the correct screw orientation, with the bolt fully inserted, as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 28

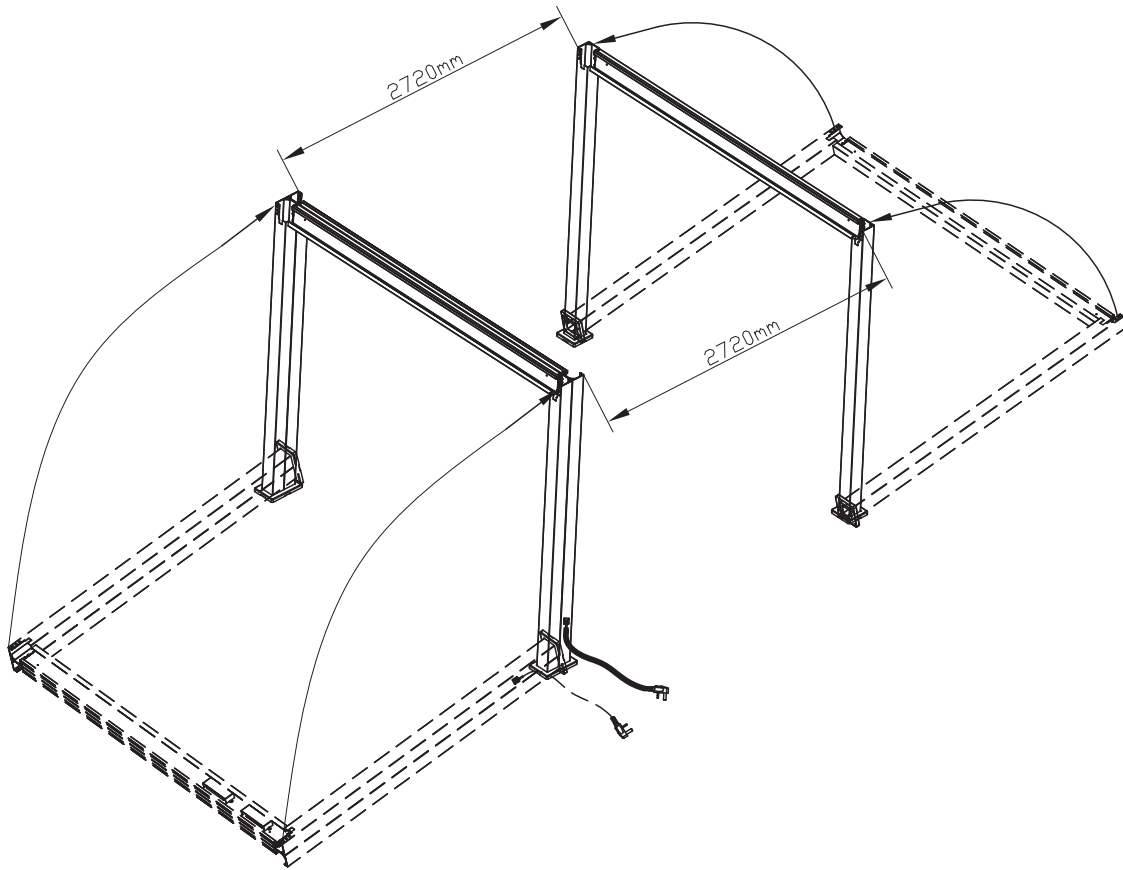

Carefully lift both assembled frame structures upright.


Ensure the distance between the frames is 2720 mm as shown in the diagram.

Adjust the frames to ensure they are properly aligned and level on the ground.

Verify that all connections are still loose and ready for final adjustments before tightening.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 29

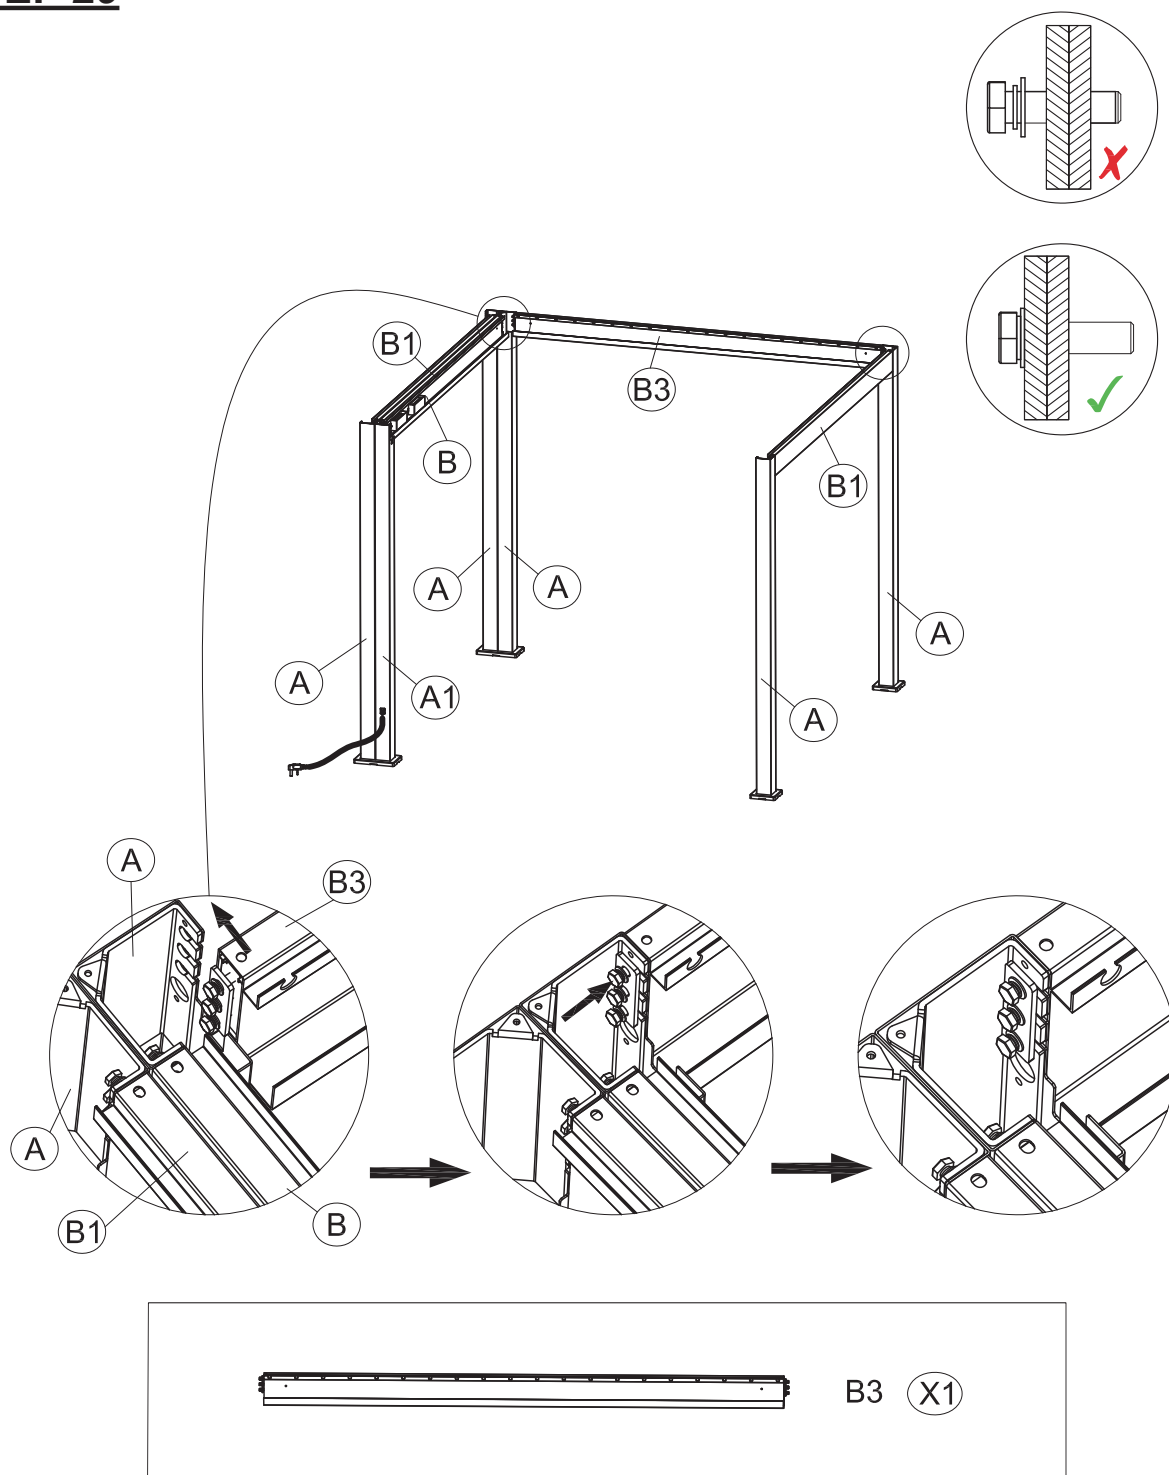

Attach the Left Beam Tube (B3) between the leg tubes (A) as shown. Align the connectors on the beam with the connection points on the leg tubes. Insert the screws into the connection points but leave them loose for adjustments. Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 30

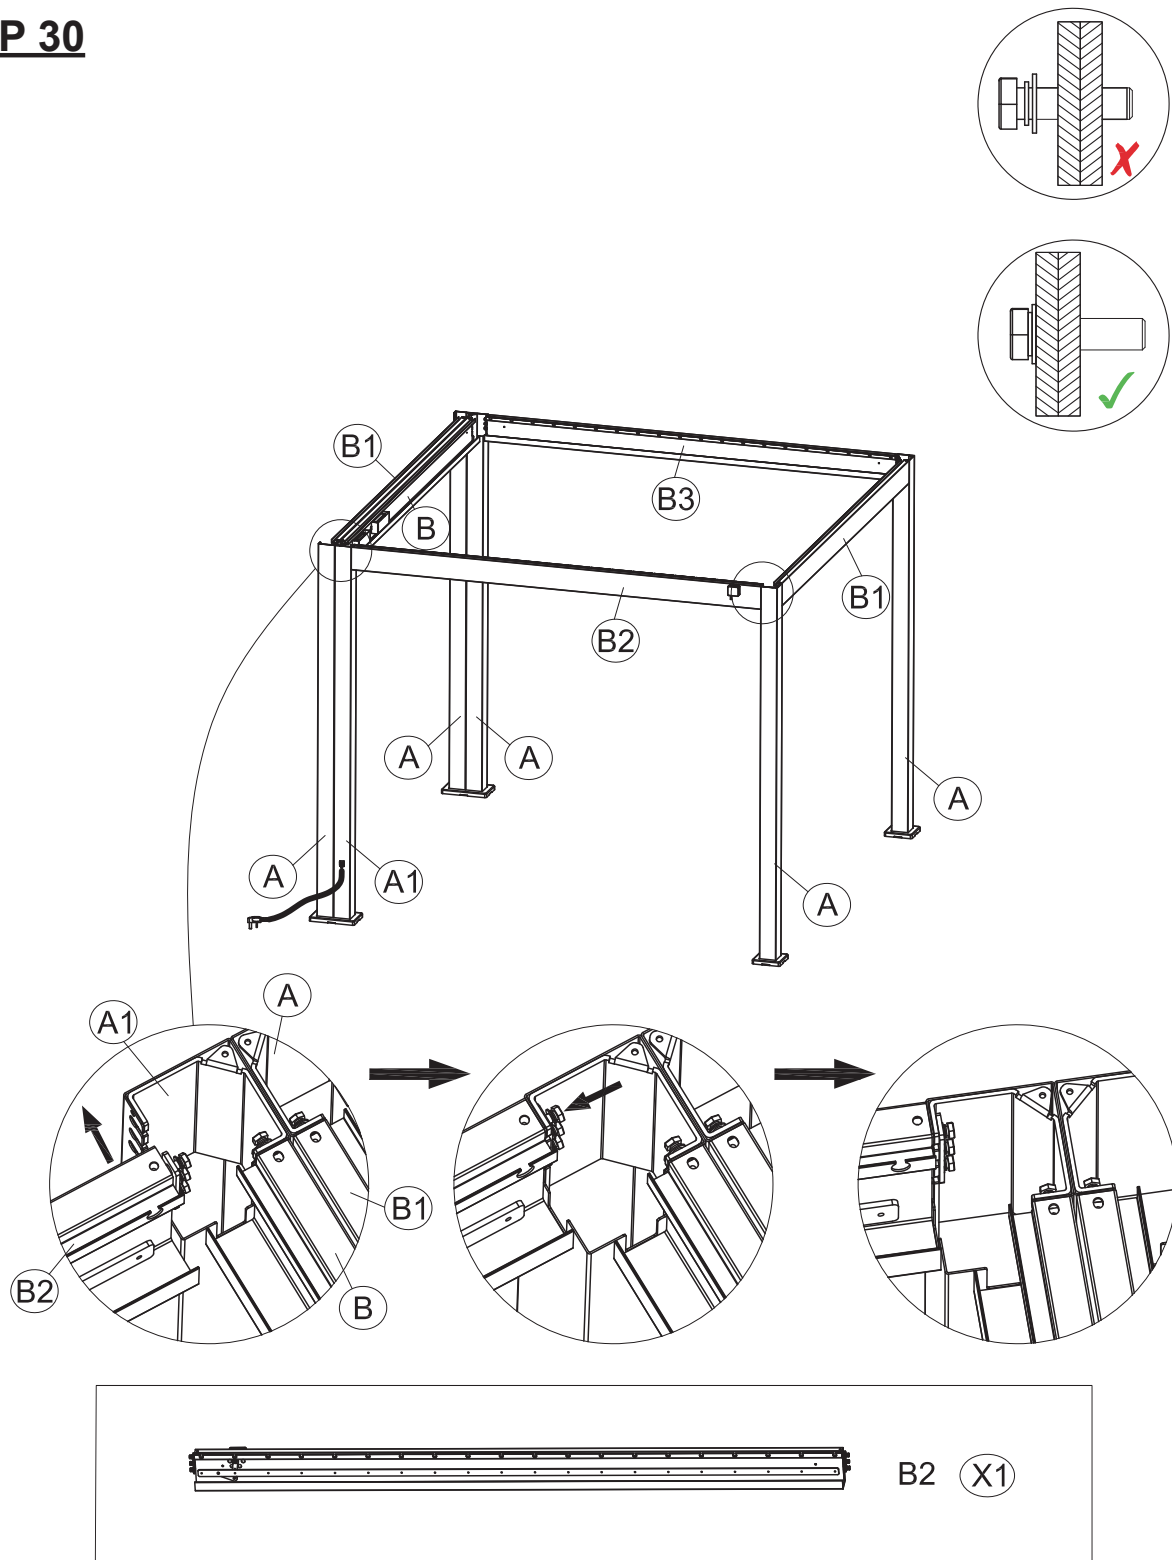

Attach the Right Beam Tube (B2) between the leg tubes (A) as shown. Align the connectors on the beam with the connection points on the leg tubes. Insert the screws into the connection points but leave them loose for adjustments. Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 31

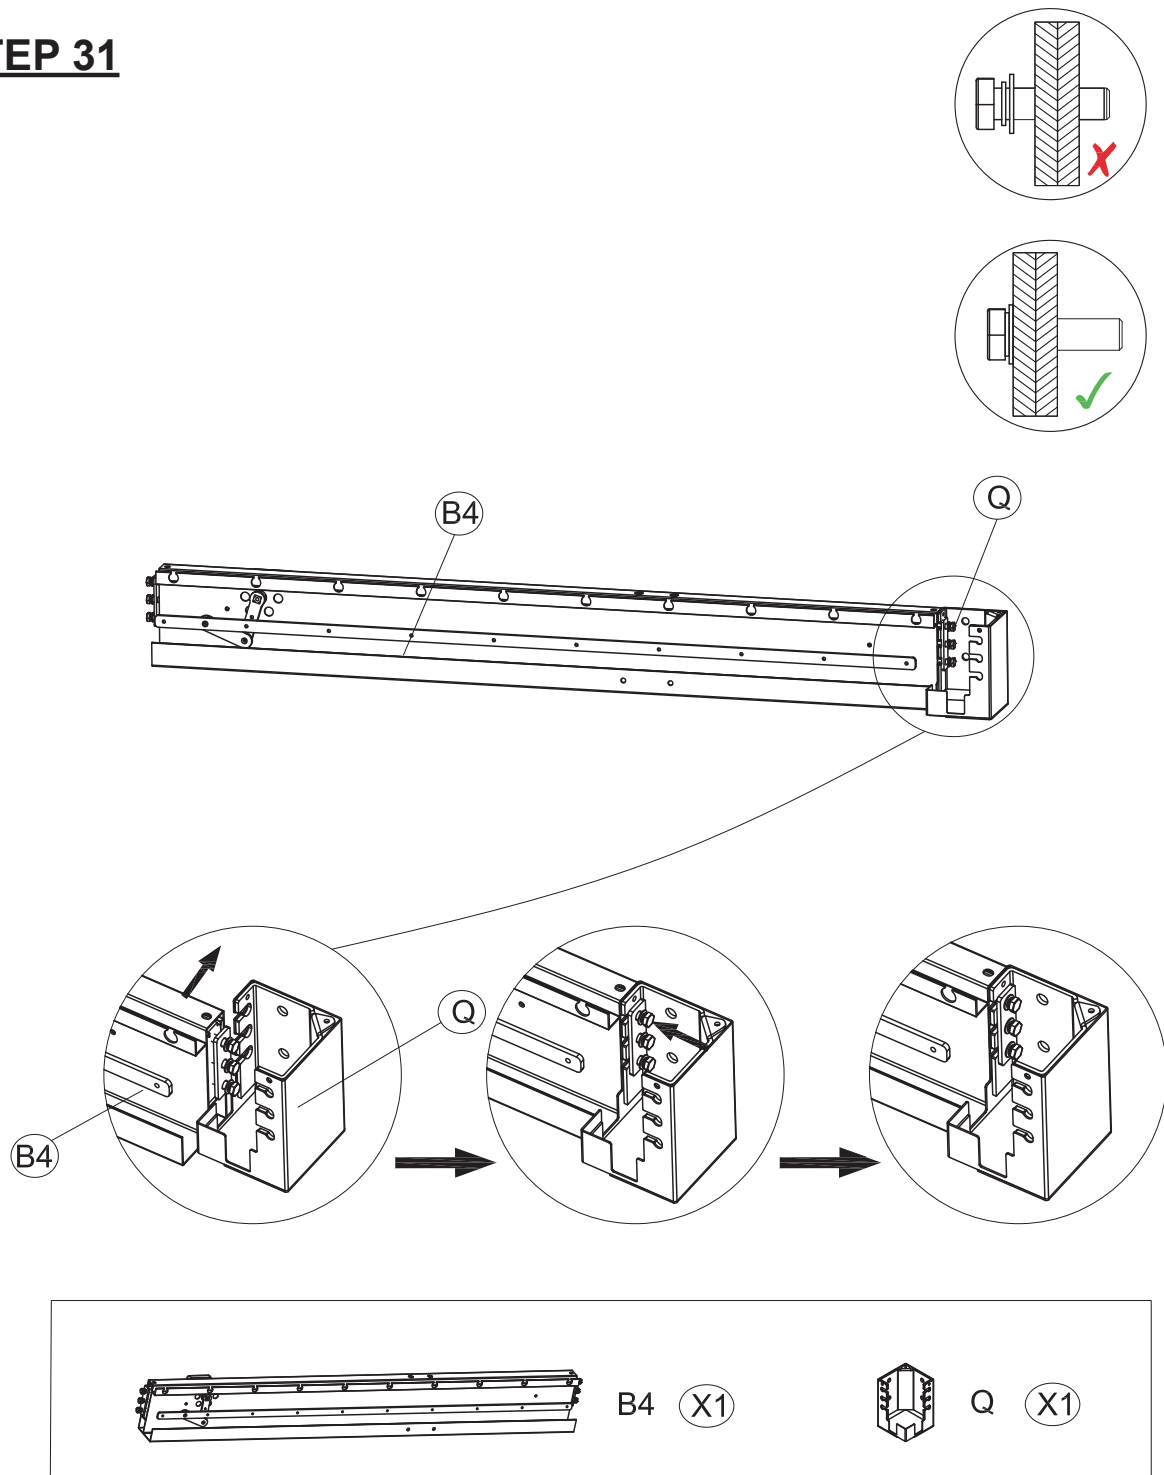

Attach the Beam Connector (Q) to the Right Beam Tube (B4) as shown. Align the connectors on the beam with the connection points on the leg tubes. Insert the screws into the connection points but leave them loose for adjustments. Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 32

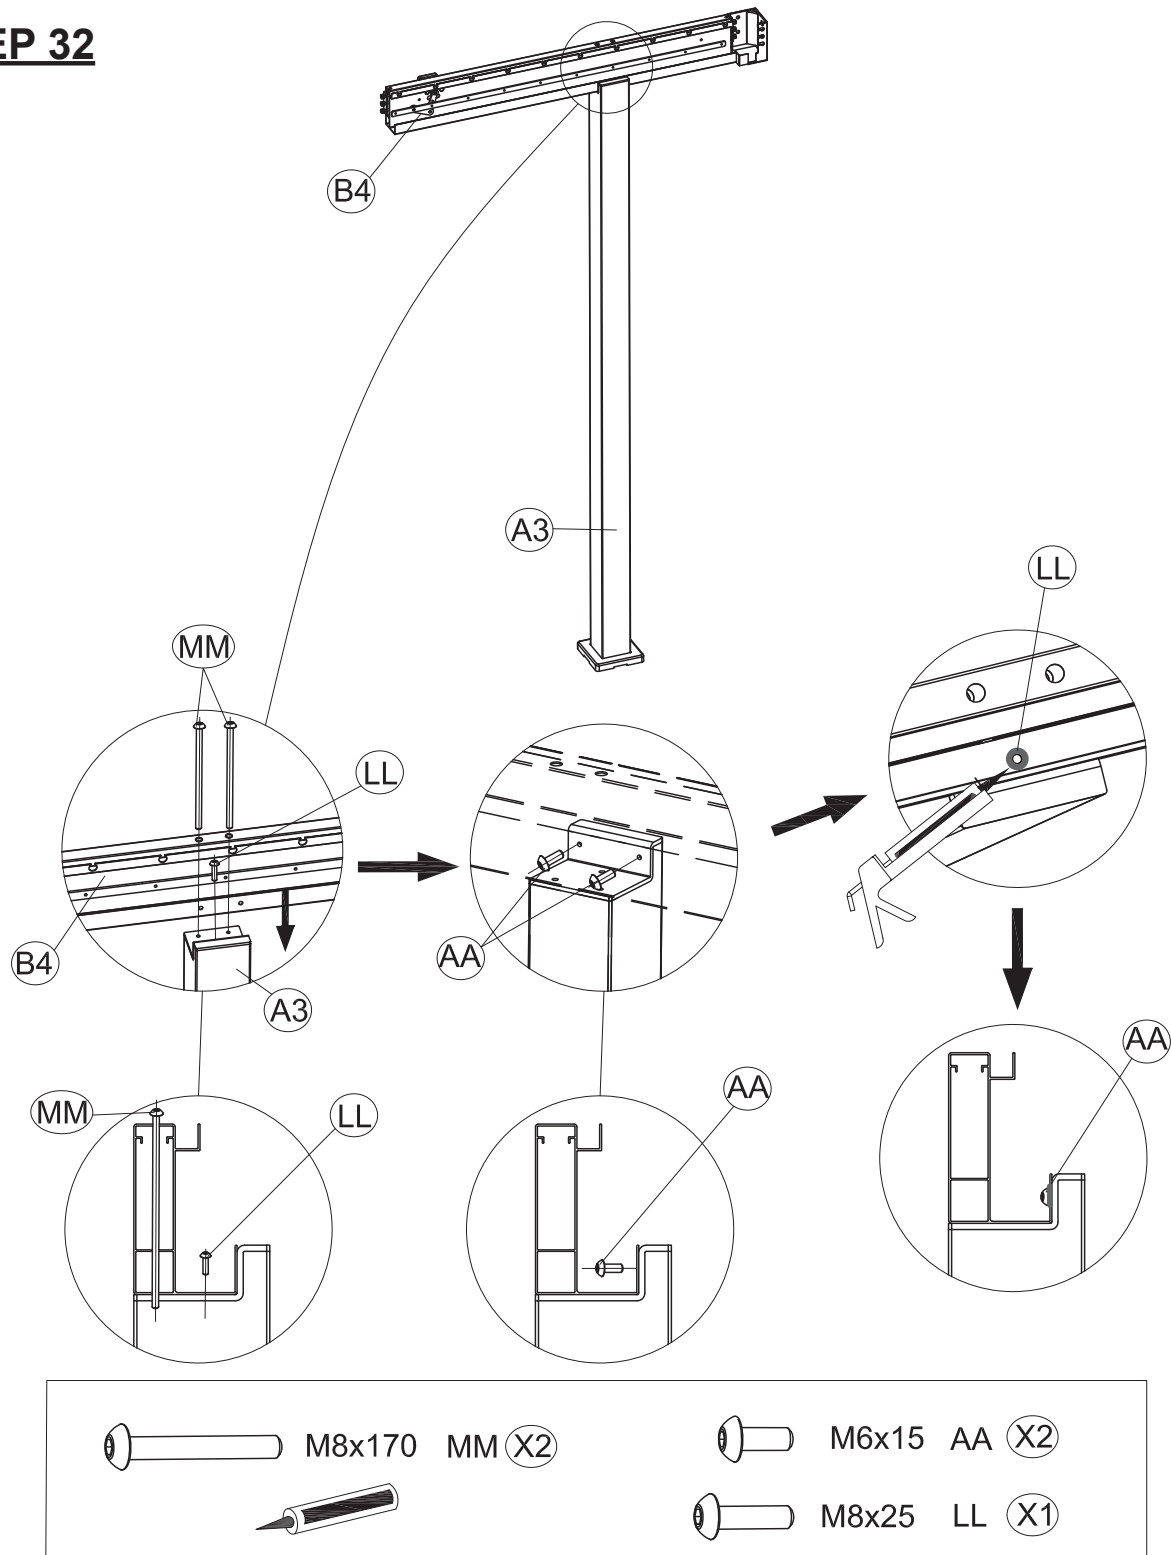

Connect the Right Beam Tube (B4) with Front Leg Tube (A3) as shown. Insert the screws (AA&LL&MM) into different screw holes as shown. Apply silicone neutral glass glue (not provided) along the screw LL as shown in the diagram. Ensure an even application of the glue to prevent any potential leaks. Note: Glue is required here to prevent leaks.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 33

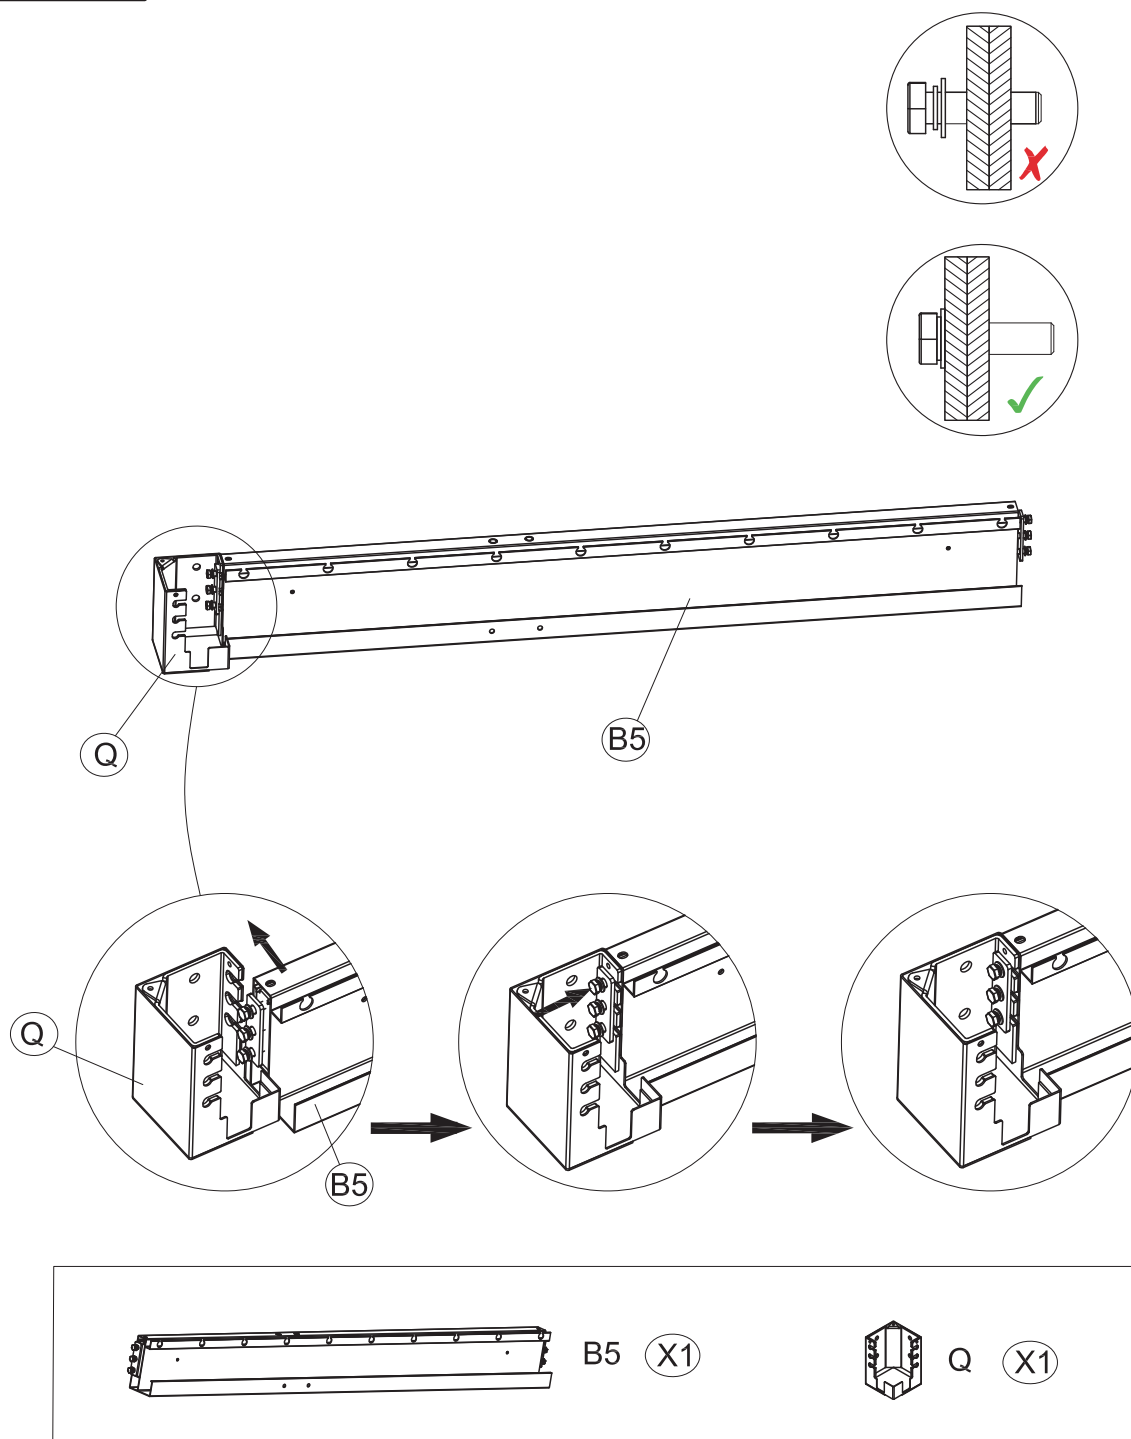

Attach the Beam Connector (Q) to the Left Beam Tube (B5) as shown.
Align the connectors on the beam with the connection points on the leg tubes.
Insert the screws into the connection points but leave them loose for adjustments.
Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 34

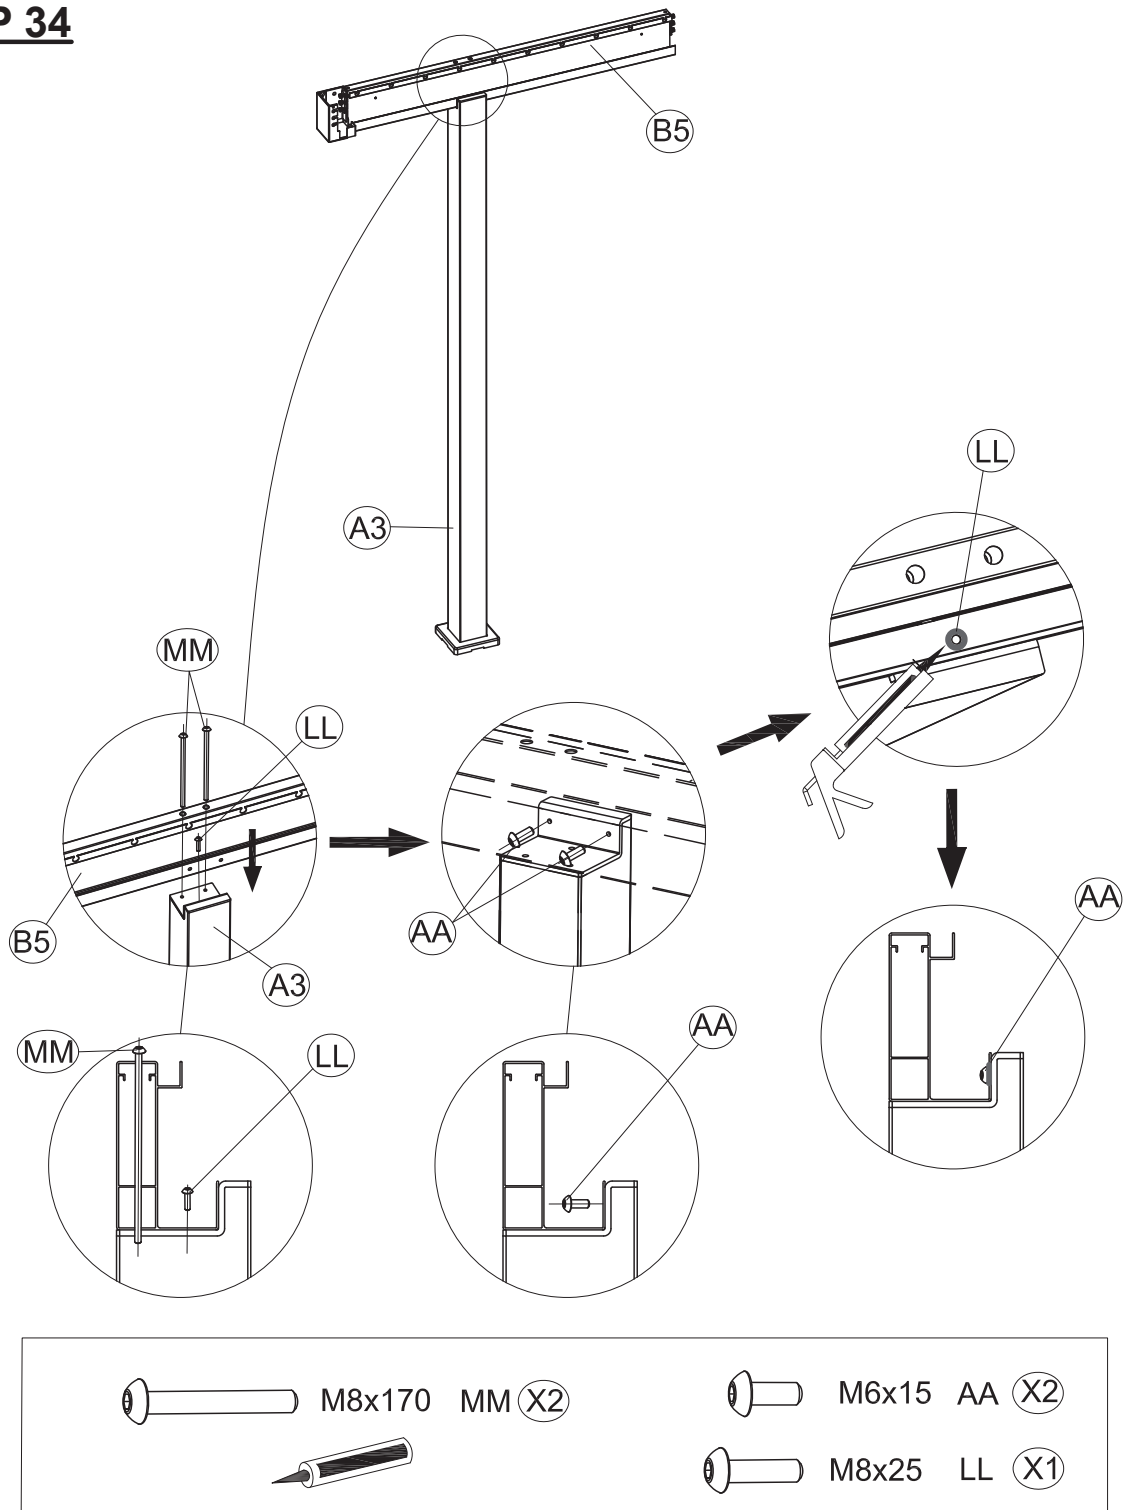

Connect the Left Beam Tube (B5) with Front Leg Tube (A3) as shown.
 Insert the screws (AA&LL&MM) into different screw holes as shown.
 Apply silicone neutral glass glue (not provided) along the screw LL as shown in the diagram.
 Ensure an even application of the glue to prevent any potential leaks.
 Note: Glue is required here to prevent leaks.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 35

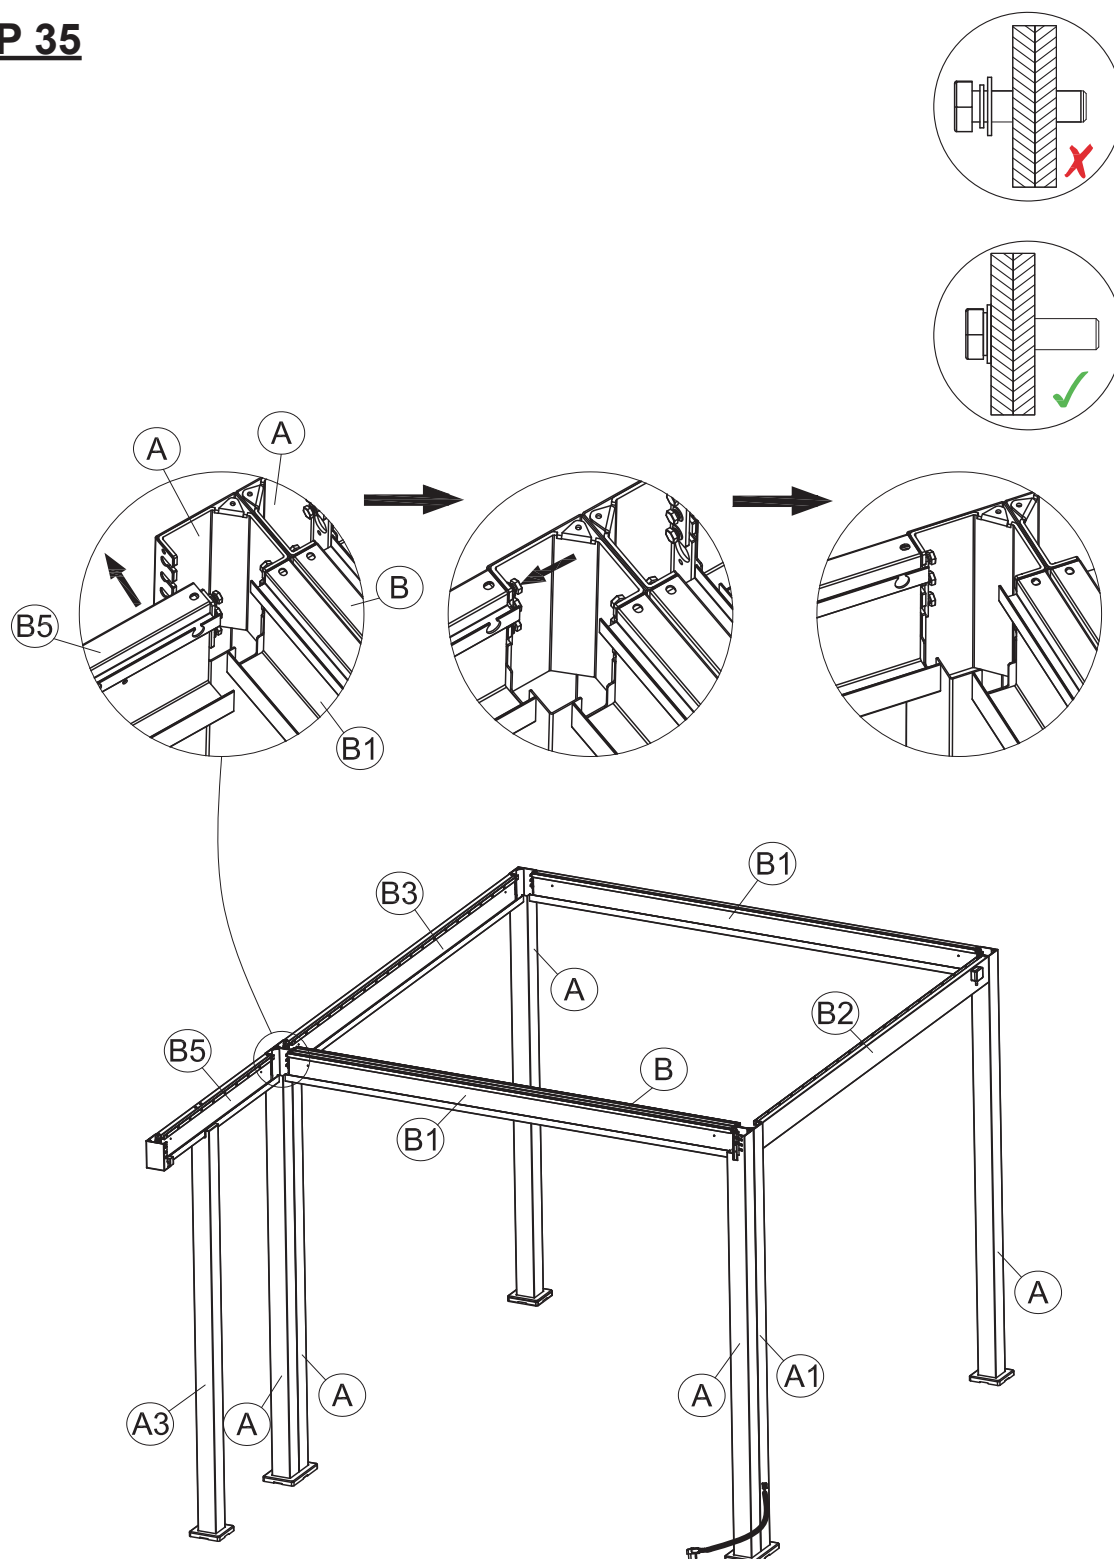

Attach the Left Beam Tube (B5) to the leg tubes (A) as shown. Align the connectors on the beam with the connection points on the leg tubes. Insert the screws into the connection points but leave them loose for adjustments. Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 36

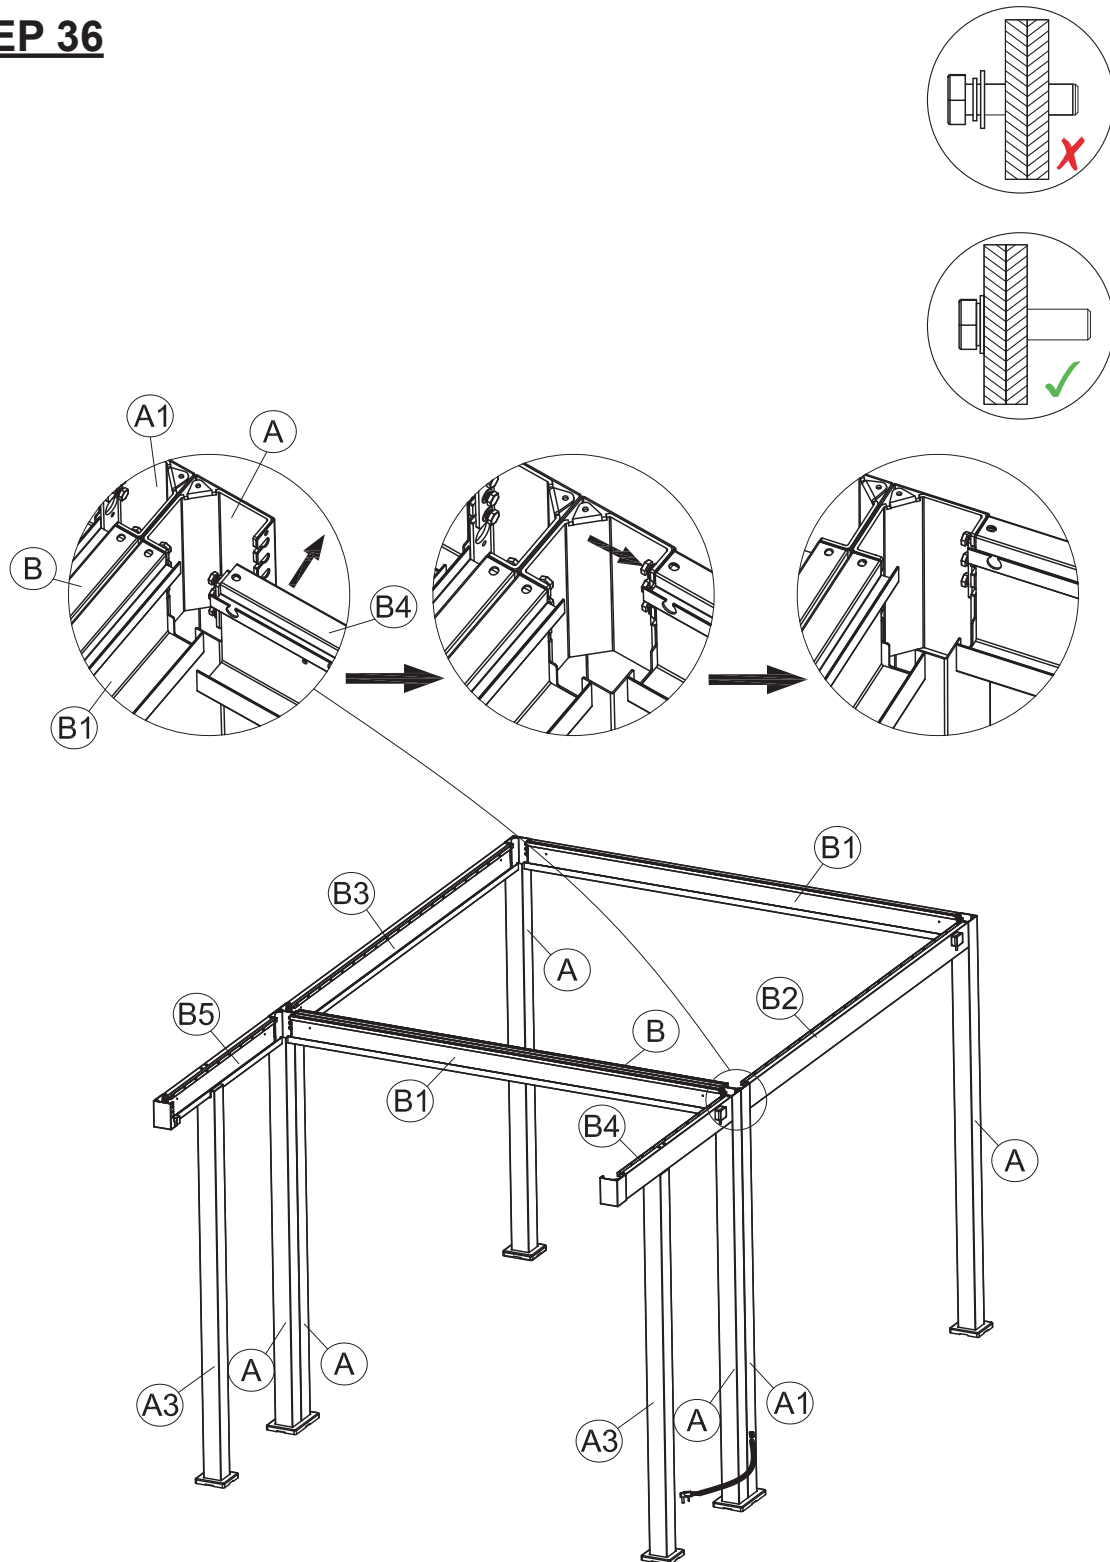

Attach the Right Beam Tube (B4) to the leg tubes (A) as shown.
Align the connectors on the beam with the connection points on the leg tubes.
Insert the screws into the connection points but leave them loose for adjustments.
Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.



STEP 37

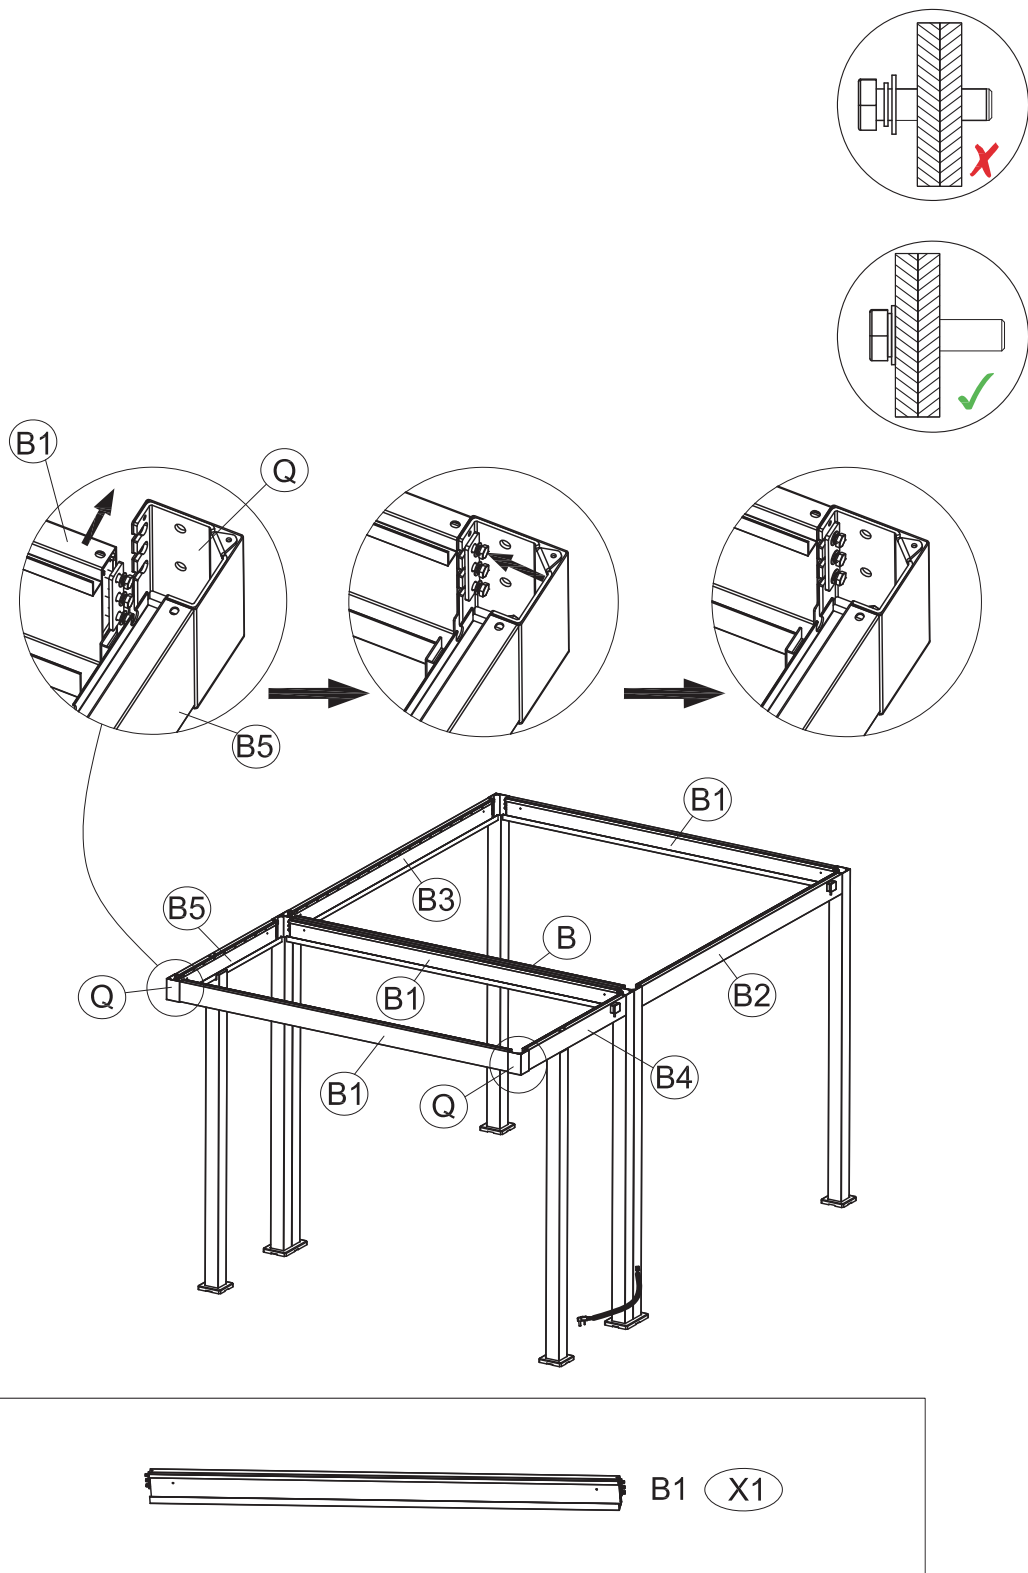

Attach the Back Beam Tube (B1) to two Beam Connectors (Q) as shown. Align the connectors on the beam with the connection points on the leg tubes. Insert the screws into the connection points but leave them loose for adjustments. Ensure the correct screw orientation as indicated in the diagram.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 38

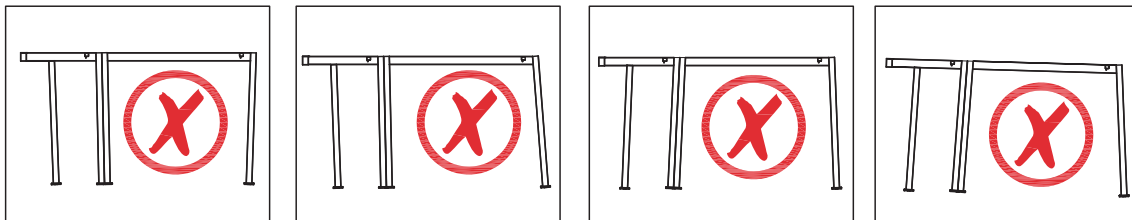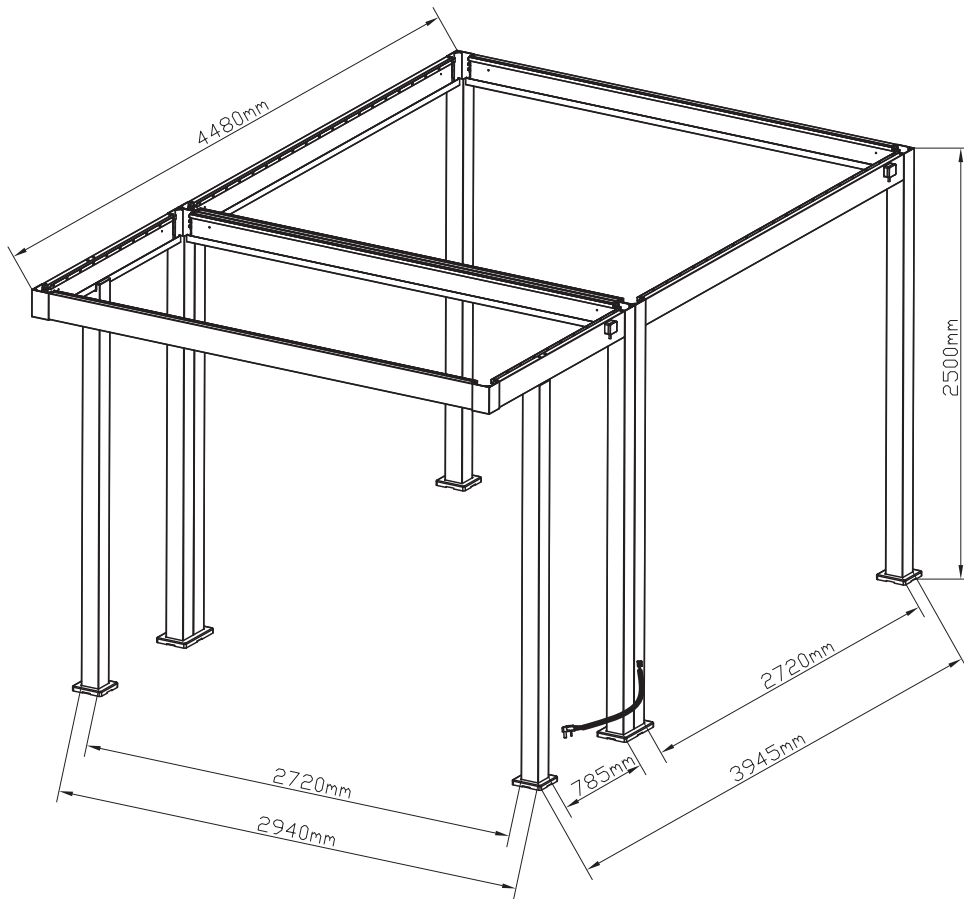

Verify that the structure is correctly positioned and aligned by measuring the distances between the legs:

Ensure the right and left width between the legs is 2720 mm.

Ensure the length is 785 mm between the legs of BBQ gazebo and 2720 mm between the legs of BBQ gazebo and 3x3m gazebo together.

Ensure the length is 4480 mm between the beam tubes of BBQ gazebo and 3x3m gazebo together.

The height should be 2500 mm as indicated.


Make sure the structure is rectangular and the legs are vertical.

Avoid any tilting as shown in the diagrams with red Xs.

Adjust the positioning as necessary to achieve correct measurements and alignment before tightening all screws.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 39

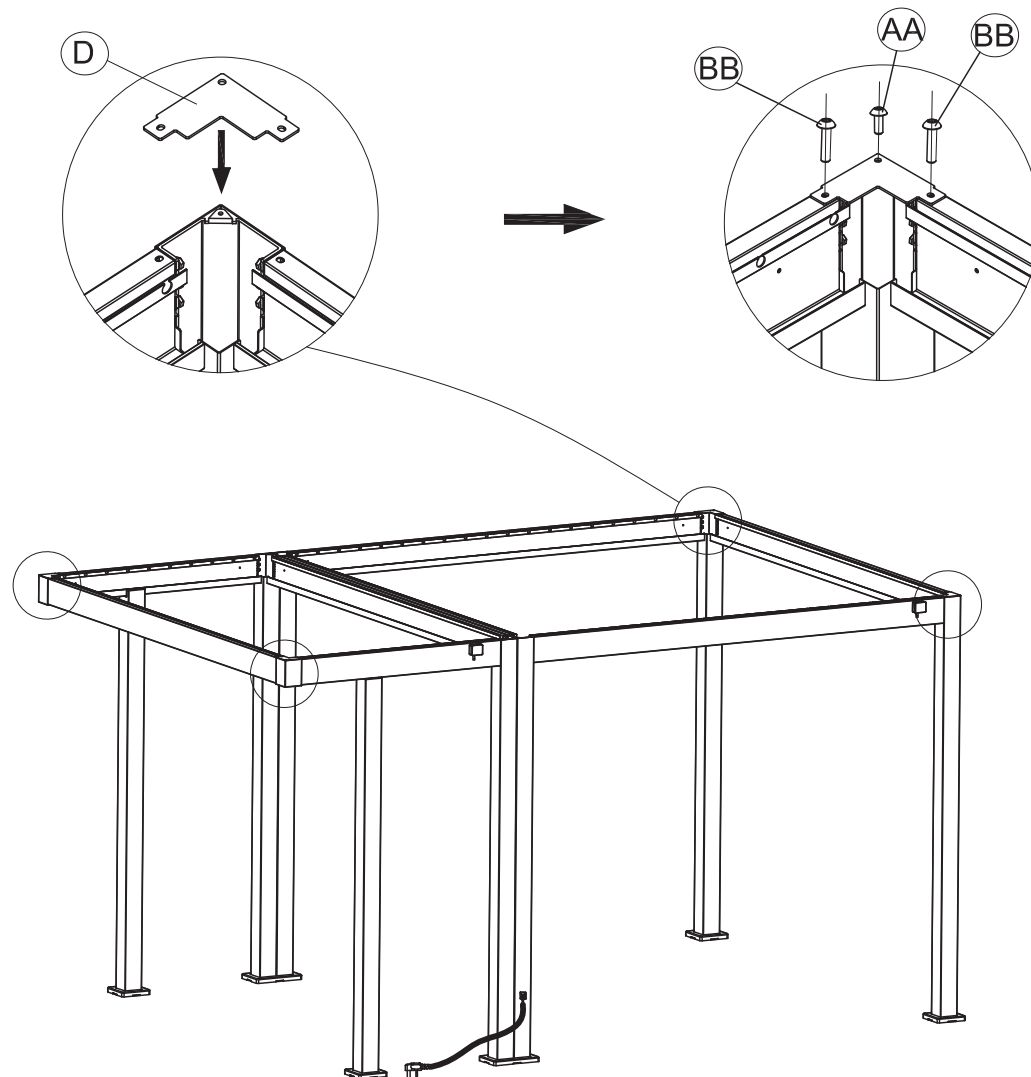

Attach the Cover for Leg Tube (D) to four corners of the structure as shown, placing one cover on each corner.


Use the M6*15 Screws (AA) to secure the cover to the frame.




Then, insert the M6*25 Screws (BB) to further secure the corner covers.

Ensure all screws are tightened securely after installation.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 40

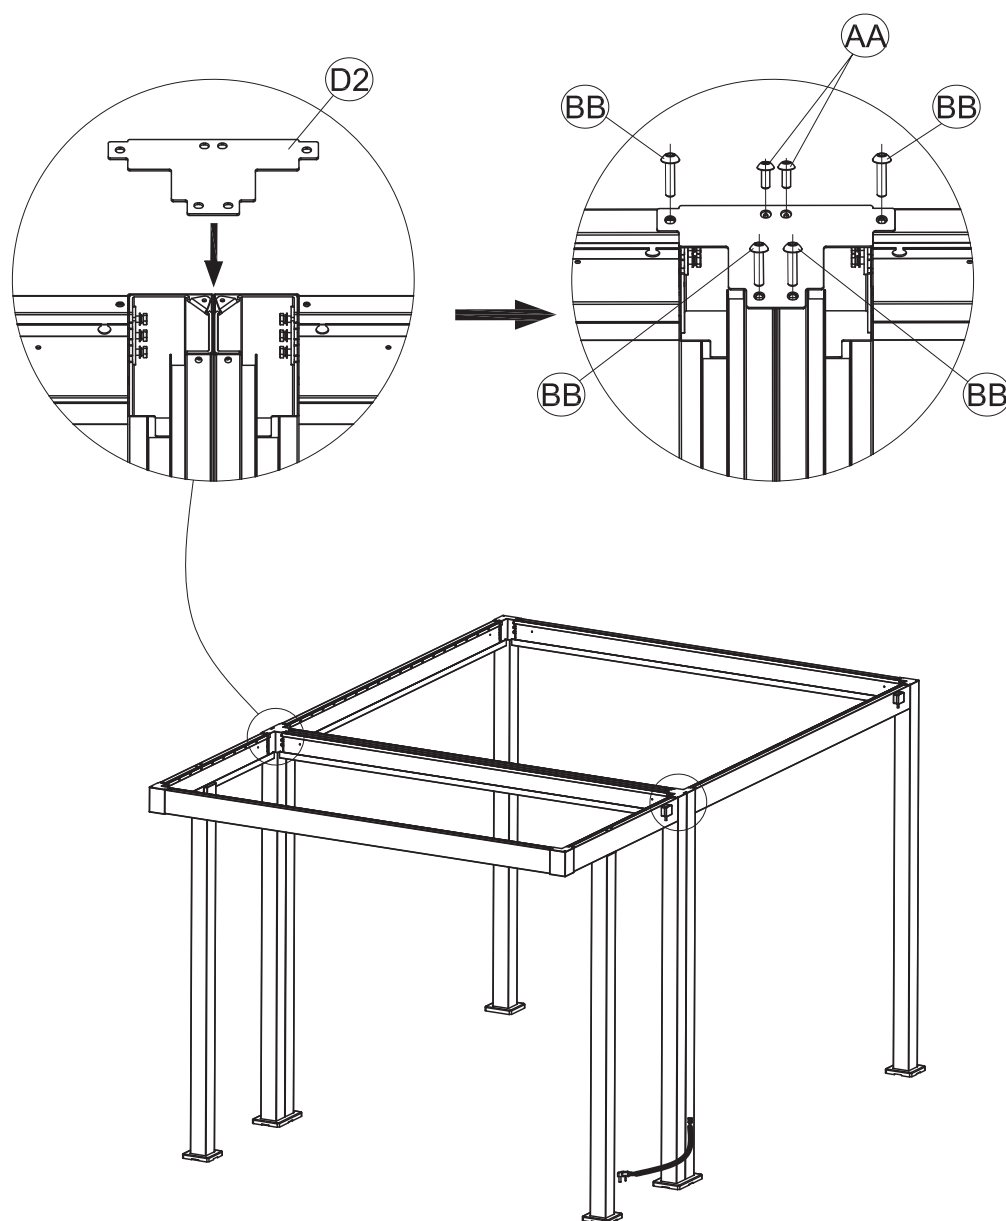

| | | | | | | |
|---|-------|----|------|--|----|------|
|  | M6*15 | AA | (X4) |  | D2 | (X2) |
|  | M6*25 | BB | (X8) | | | |

Attach the Cover for Leg Tube 1 (D2) to two connected corner of the structure as shown, placing one cover on each corner.


Use the M6*15 Screws (AA) to secure the cover to the frame.

Then, insert the M6*25 Screws (BB) to further secure the corner covers.

Ensure all screws are tightened securely after installation.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 41

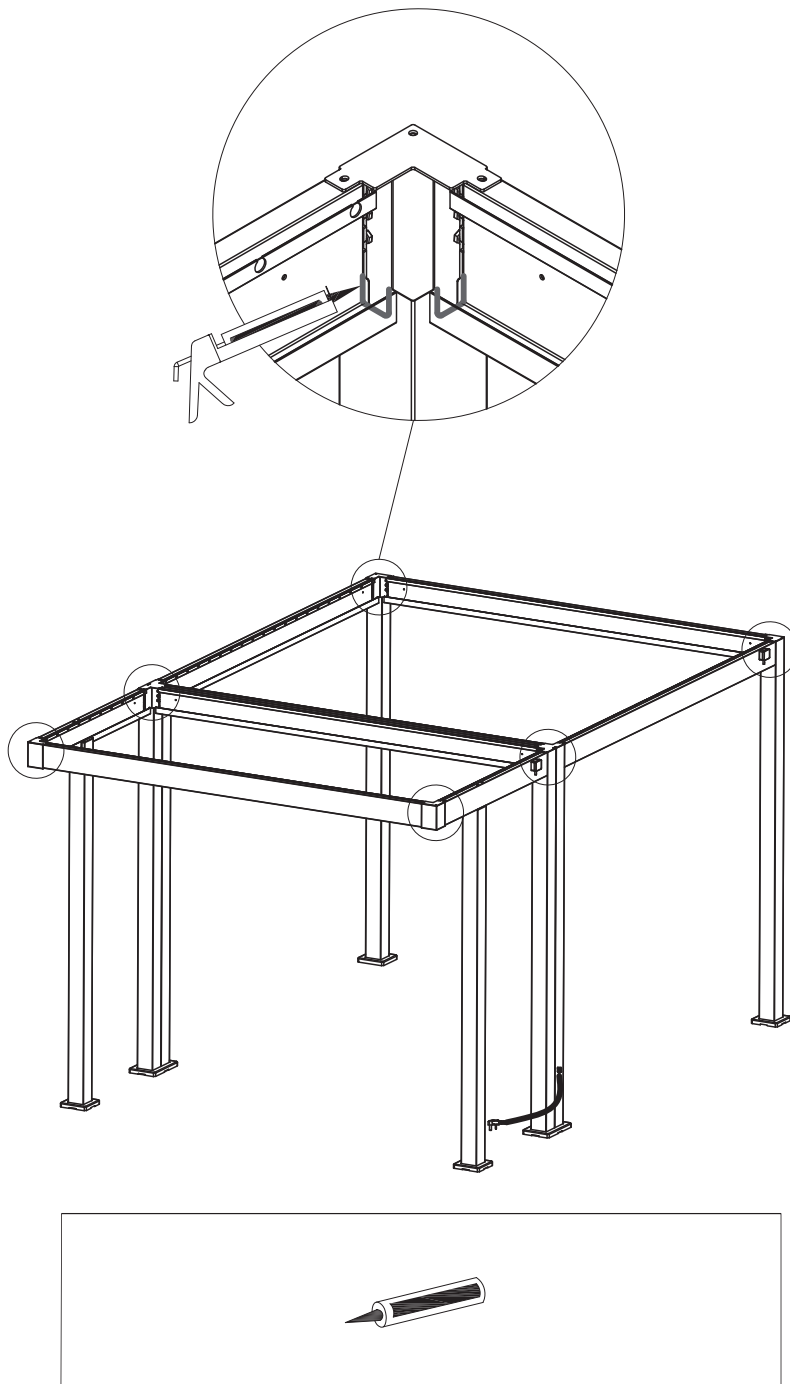


Apply silicone neutral glass glue (not provided) along the indicated seams in the corner joints as shown in the diagram.

Ensure an even application of the glue to prevent any potential leaks at the joint points.

Note: Glue is required here to prevent leaks.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 42

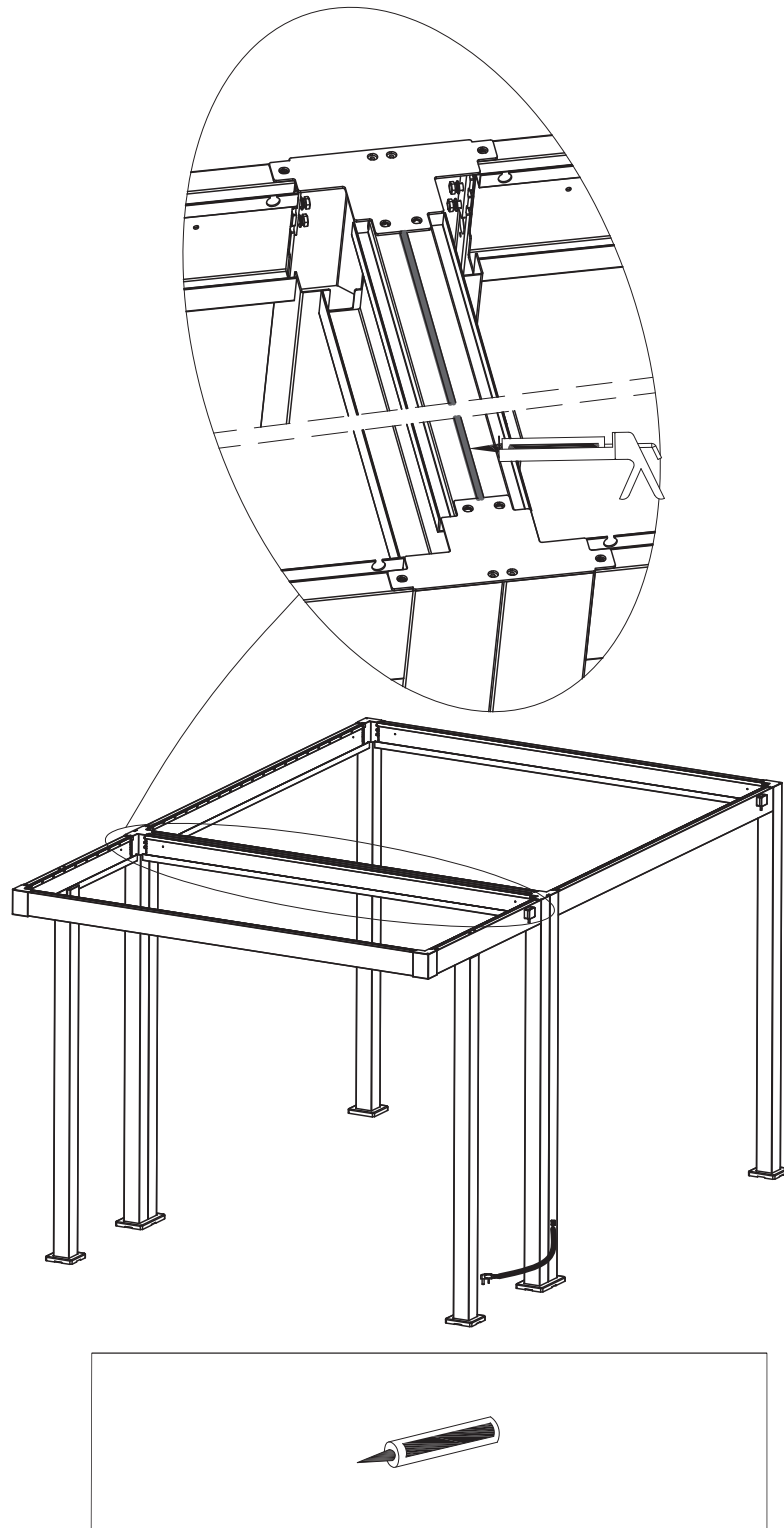


Apply silicone neutral glass glue (not provided) along the indicated seams in the corner joints as shown in the diagram.

Ensure an even application of the glue to prevent any potential leaks at the joint points.

Note: Glue is required here to prevent leaks.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 43

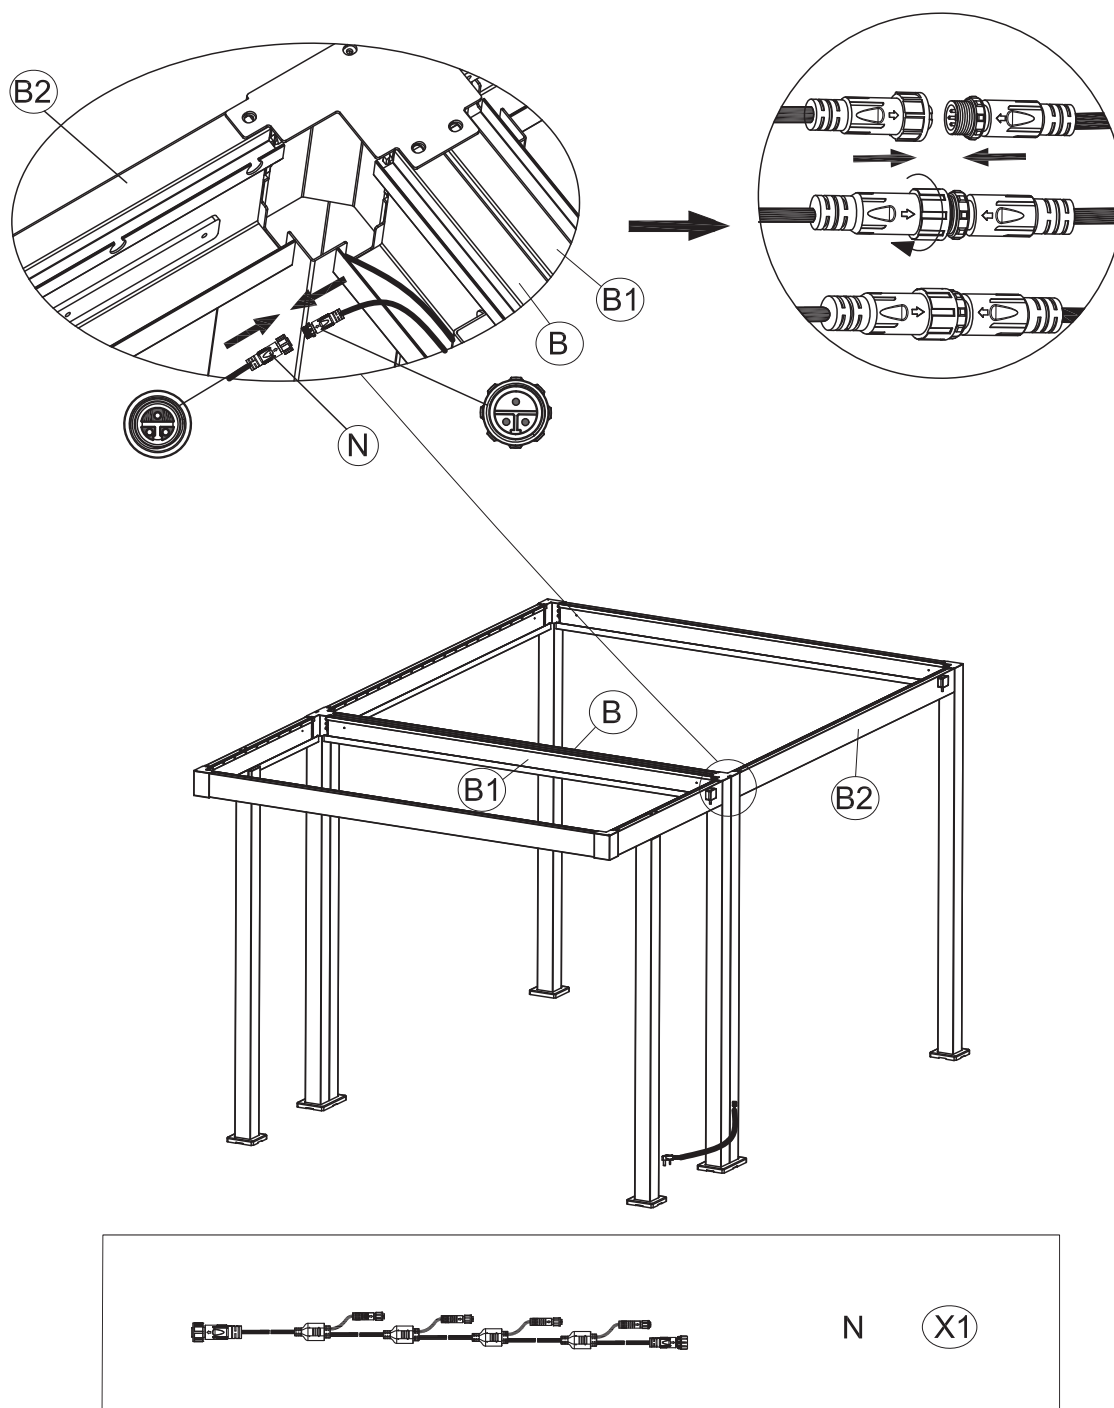


Insert Part N (wiring) into the designated connection points located at Front Beam Tube (B) as shown in the diagram.

Ensure all connections are securely fastened and the wire connectors are correctly aligned as indicated in the close-up diagram.

Verify that the wiring is properly connected between the beams and other components.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 44

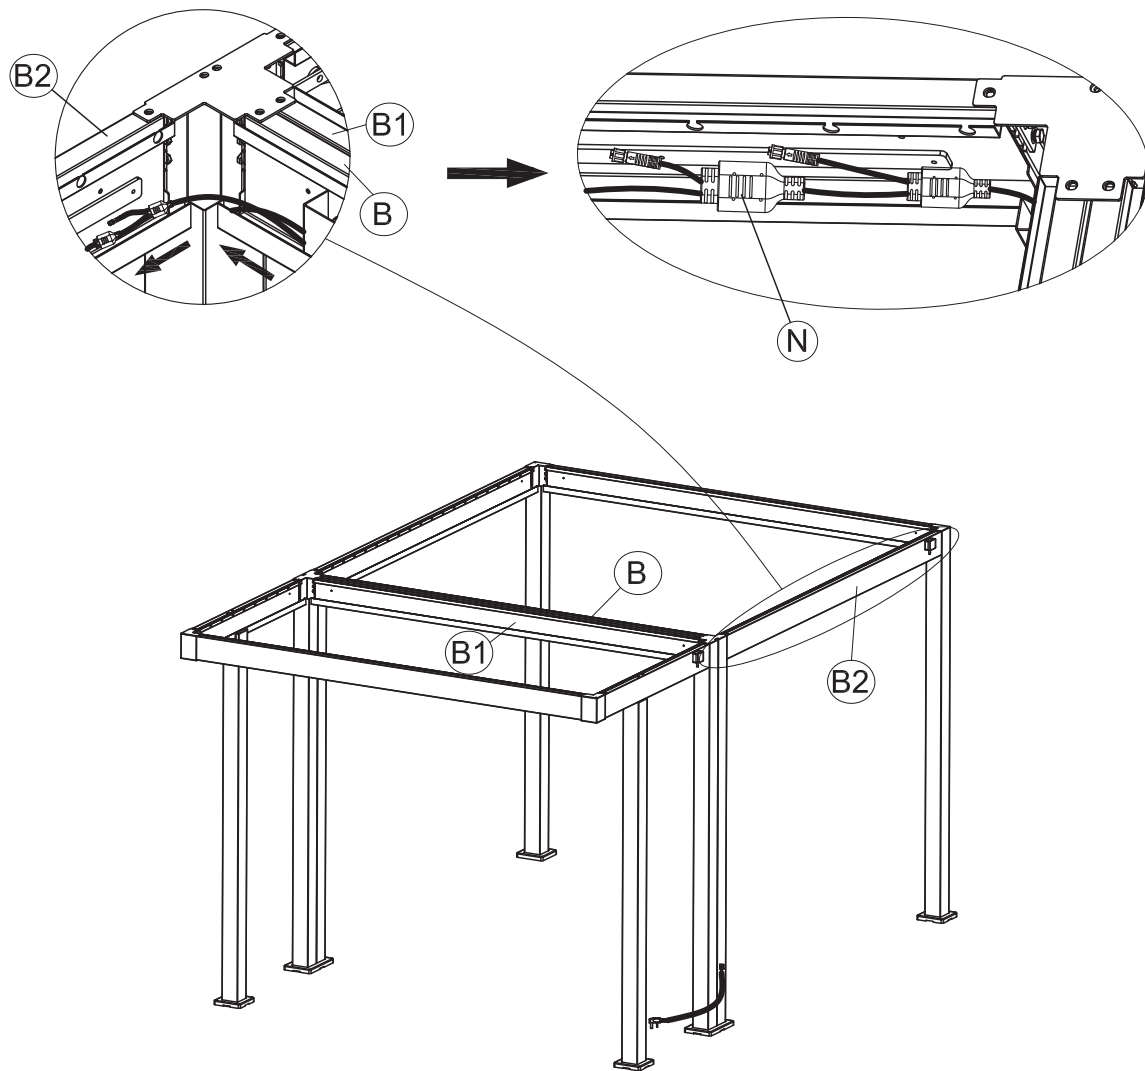

Straighten Part N (the wiring) to ensure it is properly aligned.
Place Part N into the drain slot located on Right Beam Tube (B2) as shown in the diagram.
Ensure the wire is securely positioned and that the wiring runs neatly along the beam.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 45

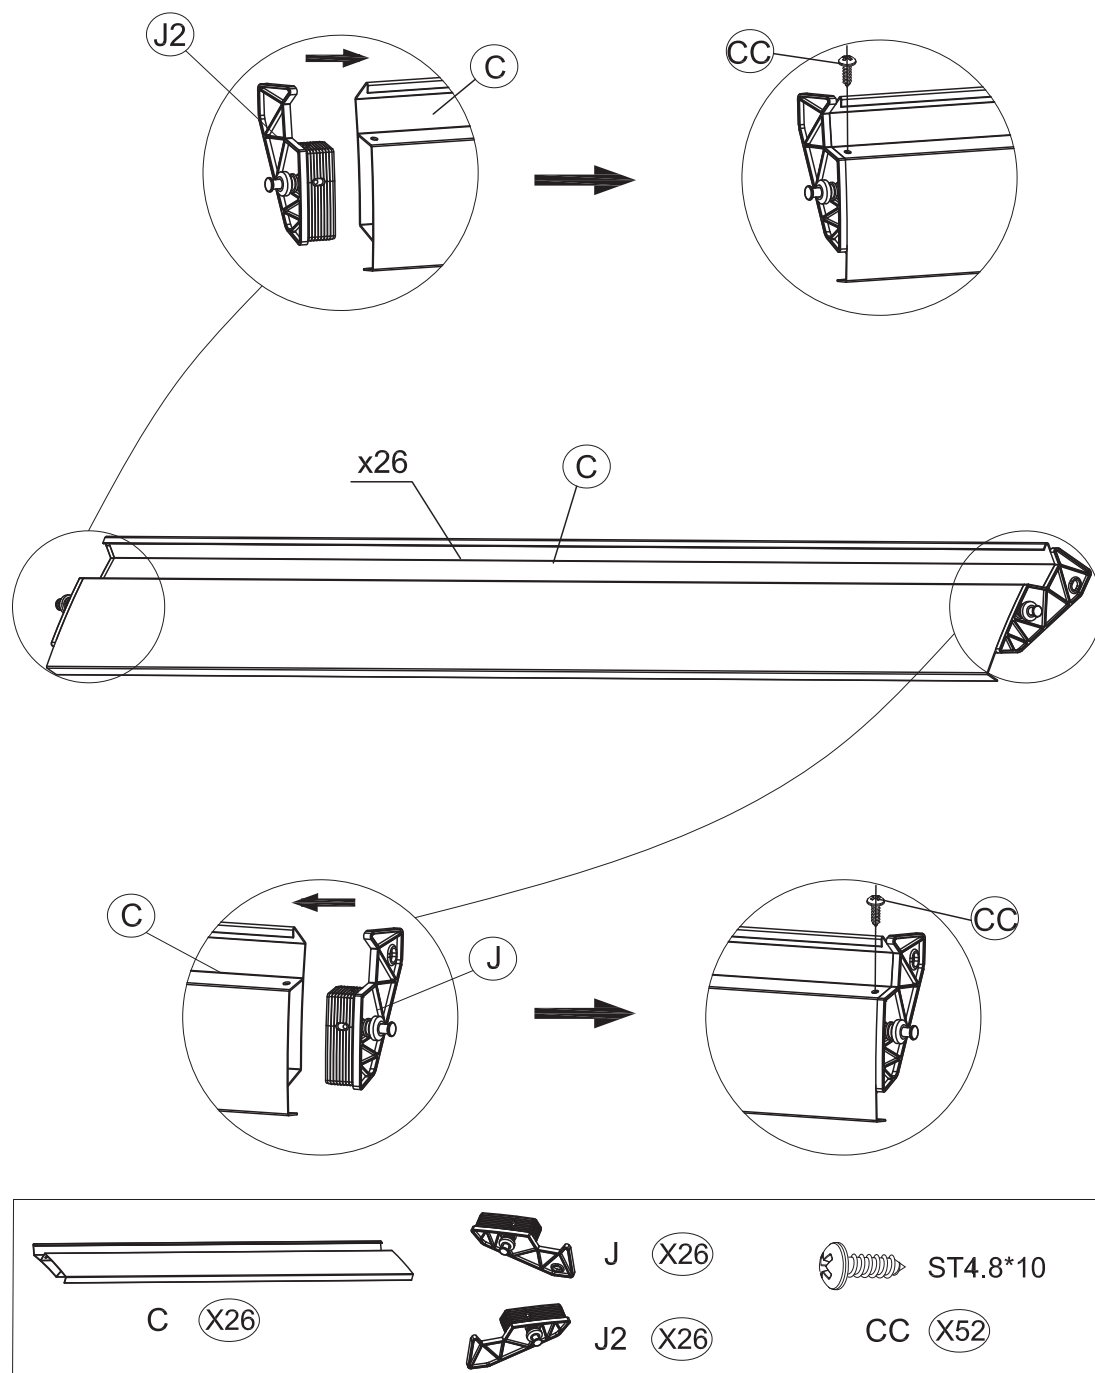

Attach the Louvre (C) to the brackets (J2) and (J) on both sides of the frame as shown in the diagram.

Insert the Louvre Cap without Hole (J2) into one side and the Louvre Cap with Hole (J) into the other side for each louvre.


Use the ST4.8*10 Screws (CC) to secure the louvres in place, with 2 screws per louvre.

Repeat the process for all 26 louvres (C).

Ensure the ends of louvres with Right Louvre Cap (J) are placed in the same direction, different from the ends of louvres with Left Louvre Cap (J2), to prepare for the subsequent steps.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 46

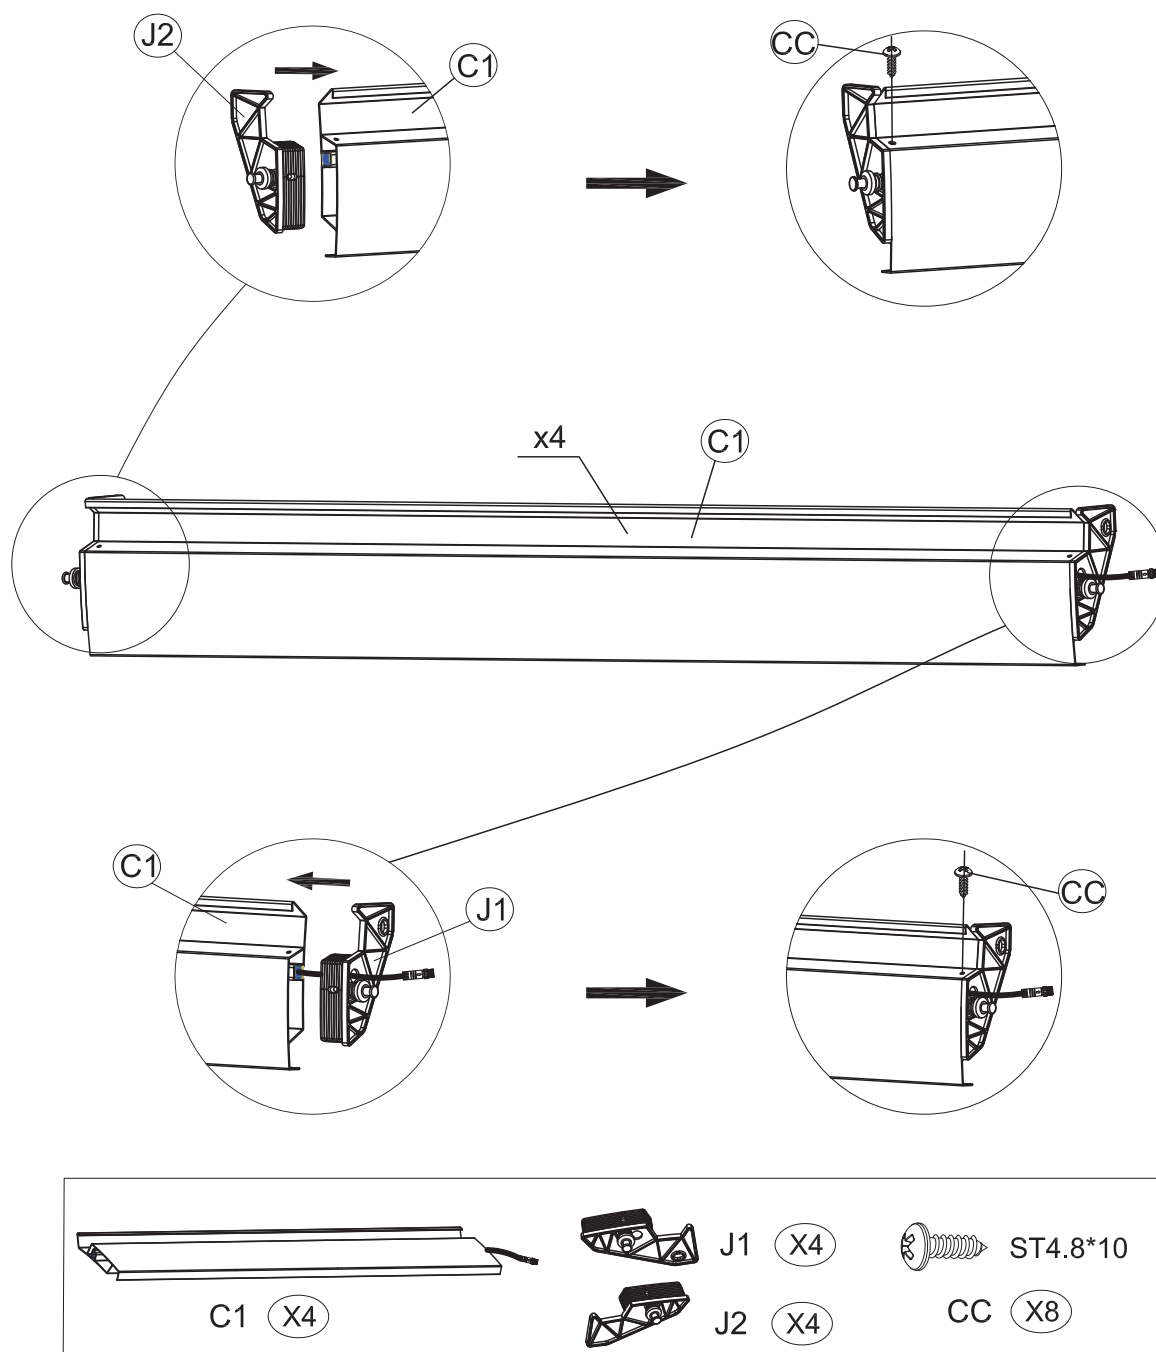

Attach the Light Louvre (C1) to the brackets (J2) and (J1) on both sides of the frame as shown. Insert the Louvre Cap without Hole (J2) into one side and the Louvre Cap with Hole (J1) into the other side for each light louvre. Use the ST4.8*10 Screws(CC) to secure the light louvres in place, with 2 screws per louvre. Repeat the process for all 4 light louvres (C1). Ensure the ends of louvres with Right Louvre Cap (J1) are placed in the same direction, different from the ends of louvres with Left Louvre Cap (J2), to prepare for the subsequent steps.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 47

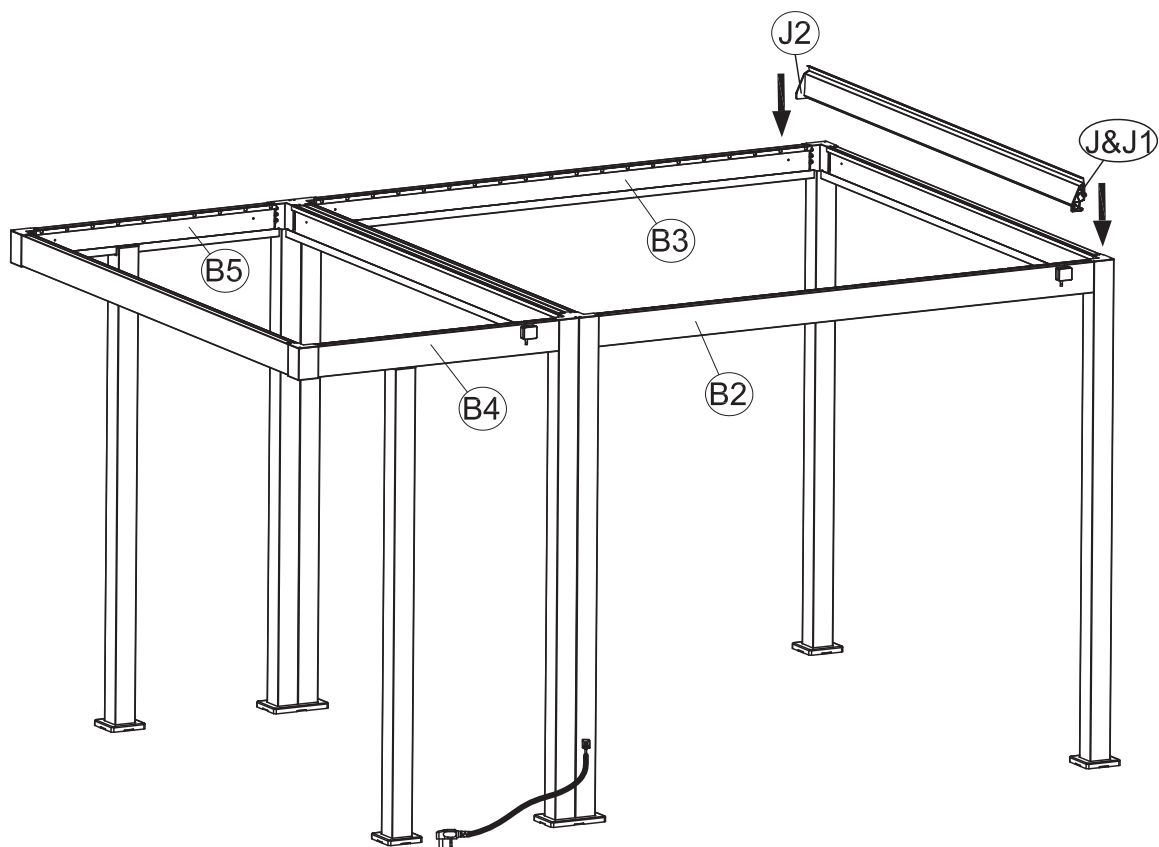

Position the Louvres (C) including the Light Louvres (C1) above the Beam Tubes (B2&B3, B4&B5) as shown.



Ensure the ends of louvres with Right Louvre Cap (J&J1) are position on the Right Beam Tube (B2&B4), the ends of louvres with Left Louvre Cap (J2) are position on the Left Beam Tube (B3&B5).

Ensure the louvres are correctly aligned with the frame.

Gently lower the louvres into place, securing them on both sides using the designated slots on the beams.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


STEP 48

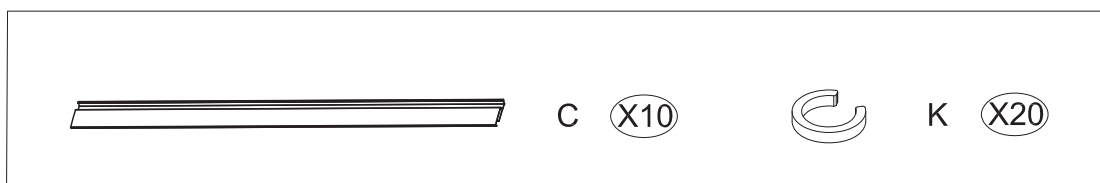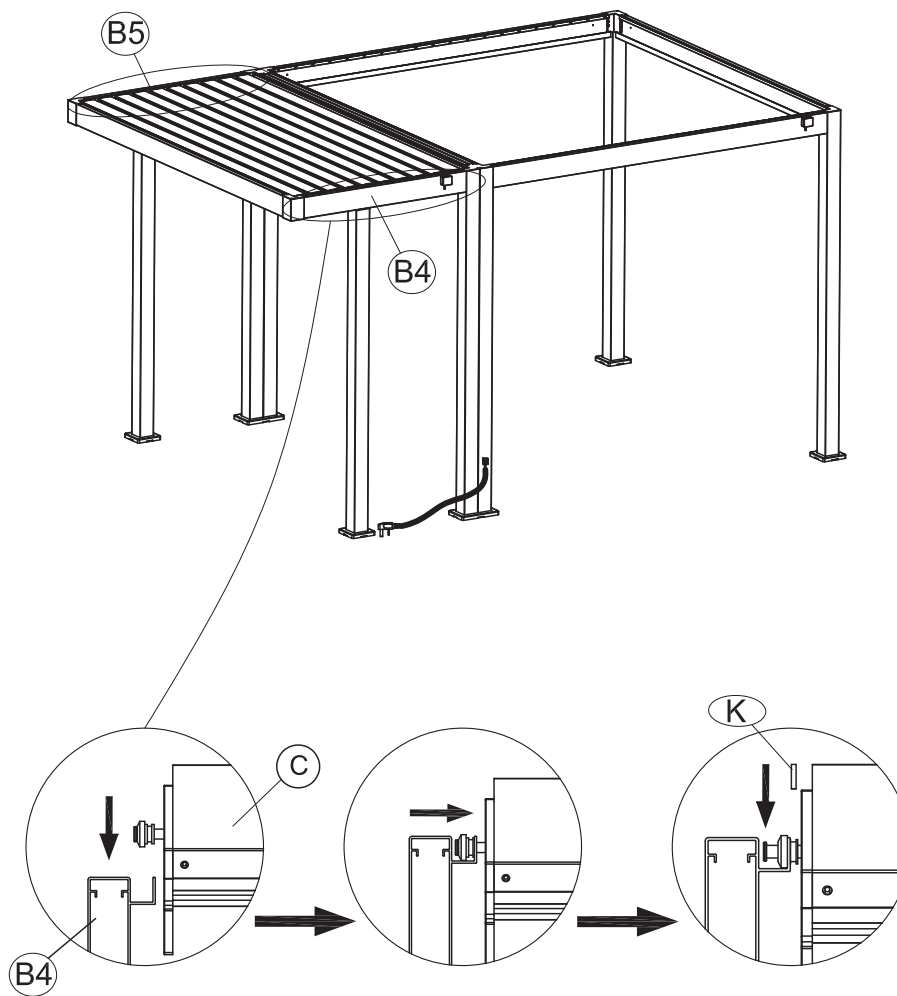

Insert 10 Louvres (C) between the Right Beam Tube (B4) and Left Beam Tube (B5) and secure it as shown.
Attach the Cap (K) on both sides of the louvre.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 49

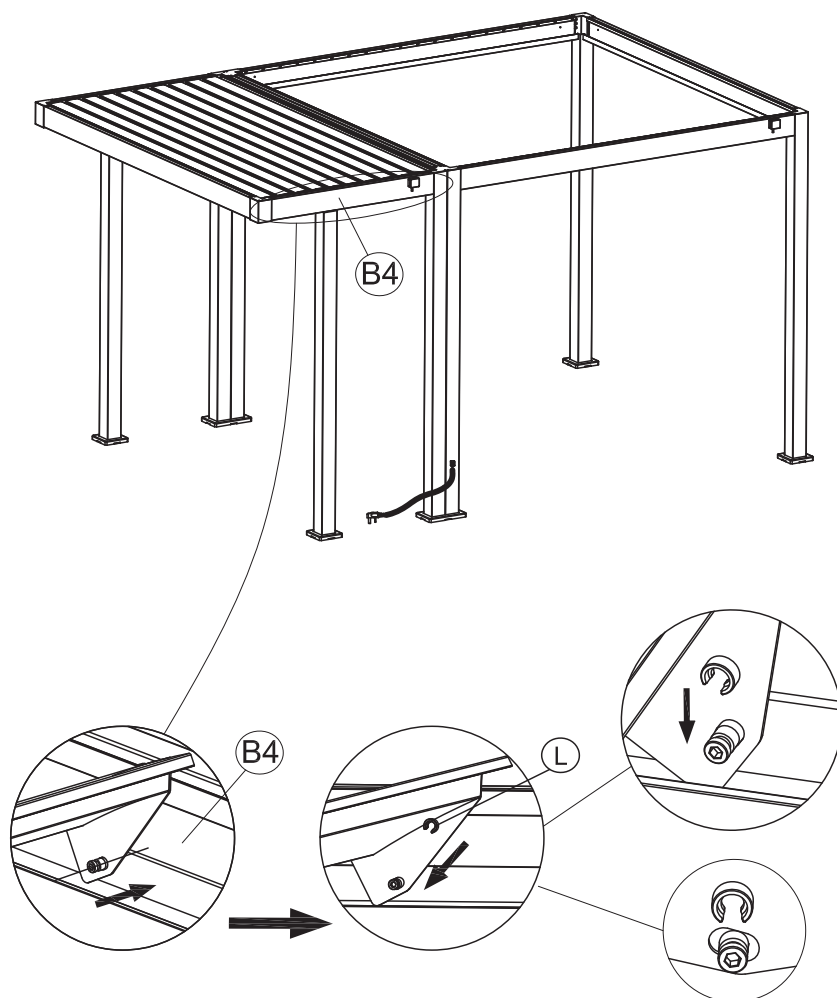



Note: Opening direction of part L



Install the Part L locks on the Right Beam Tube (B4) as indicated in the diagram, making sure the opening direction is correct.
Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 50

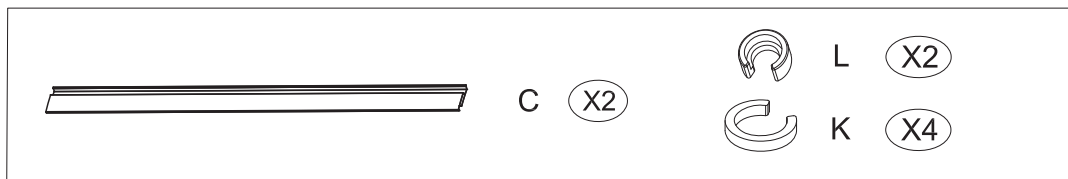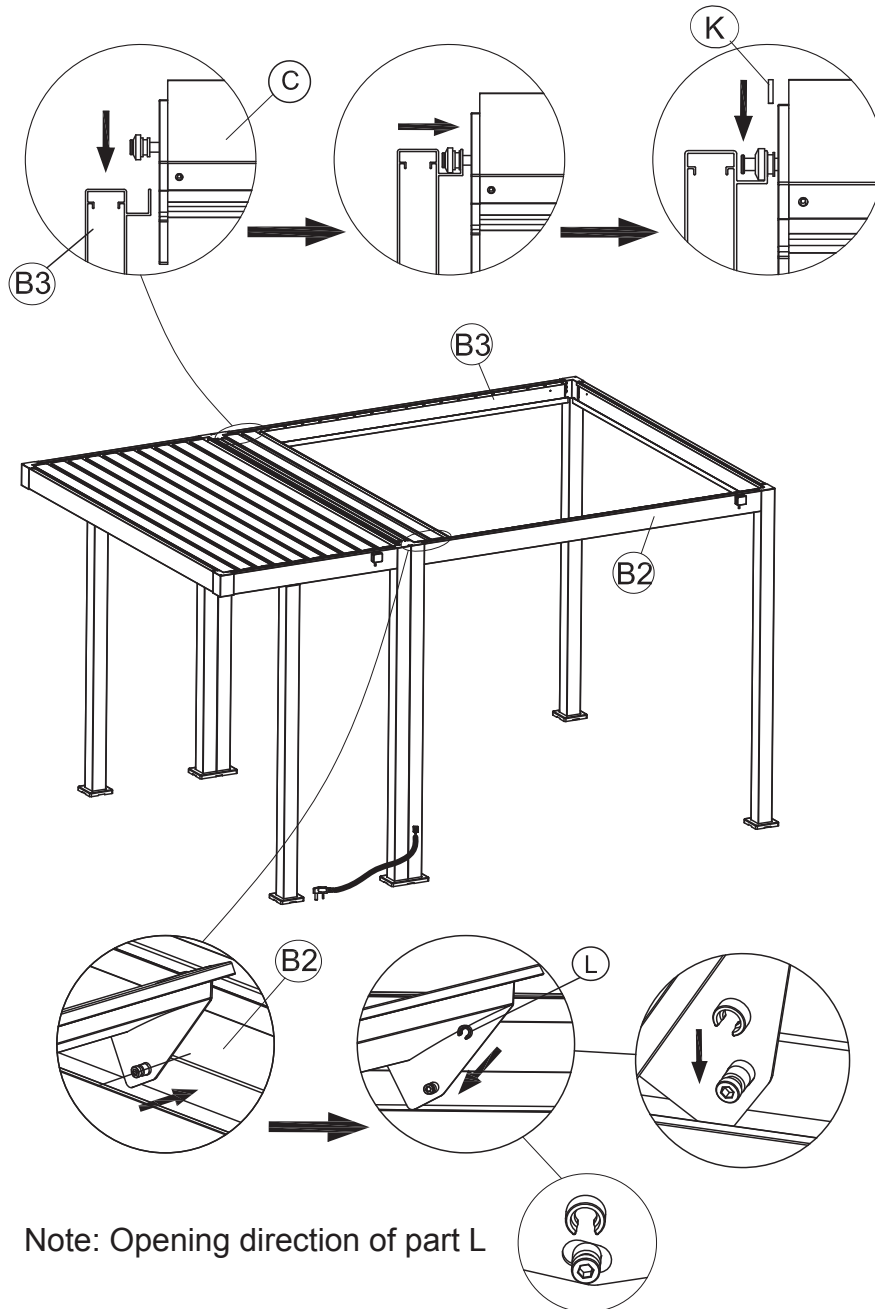

Insert 2 Louvres (C) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 51

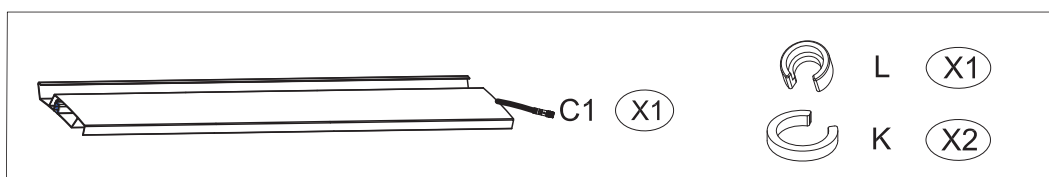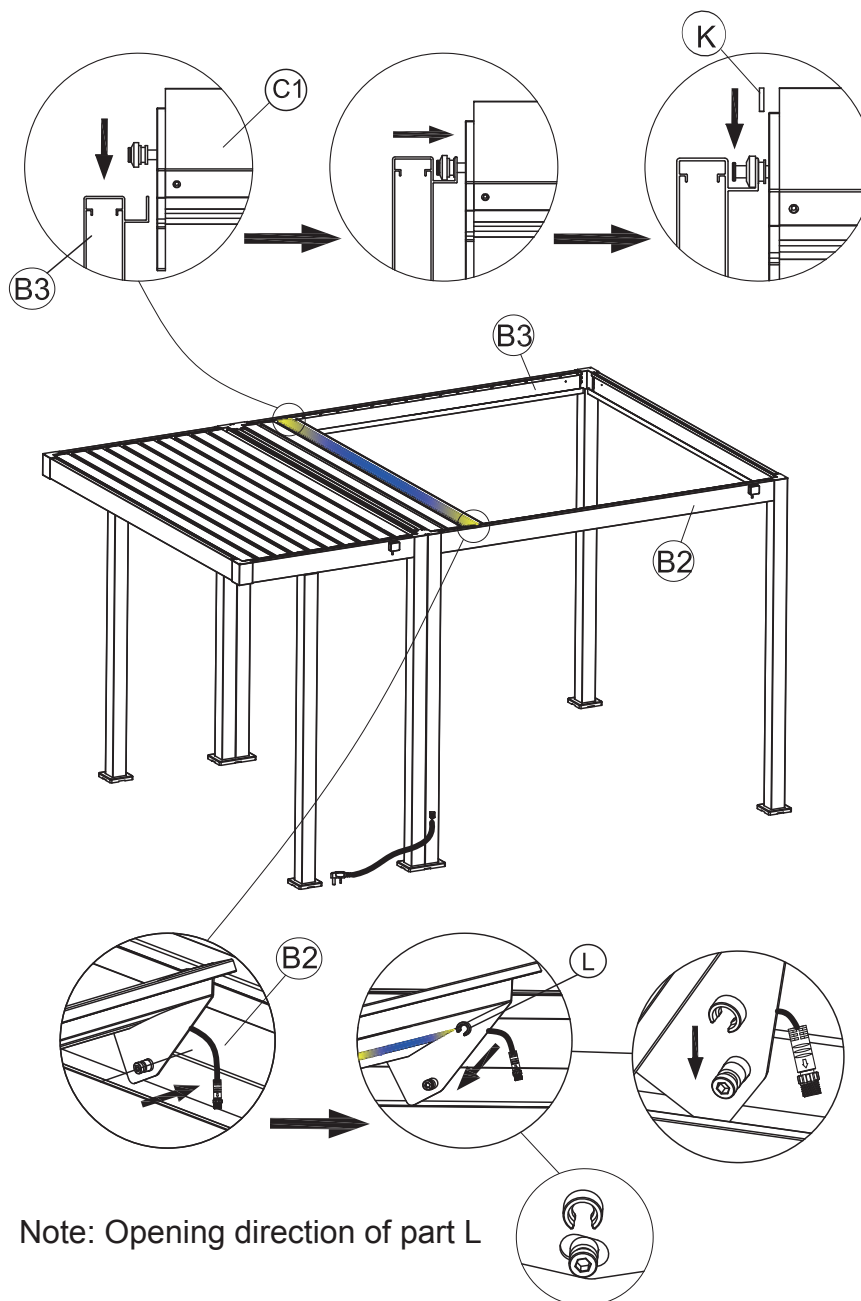

Insert a Light Louvre (C1) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 52

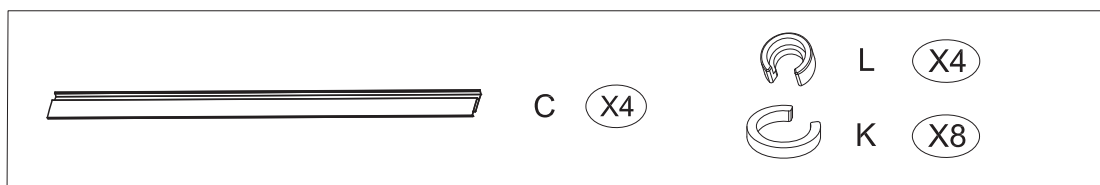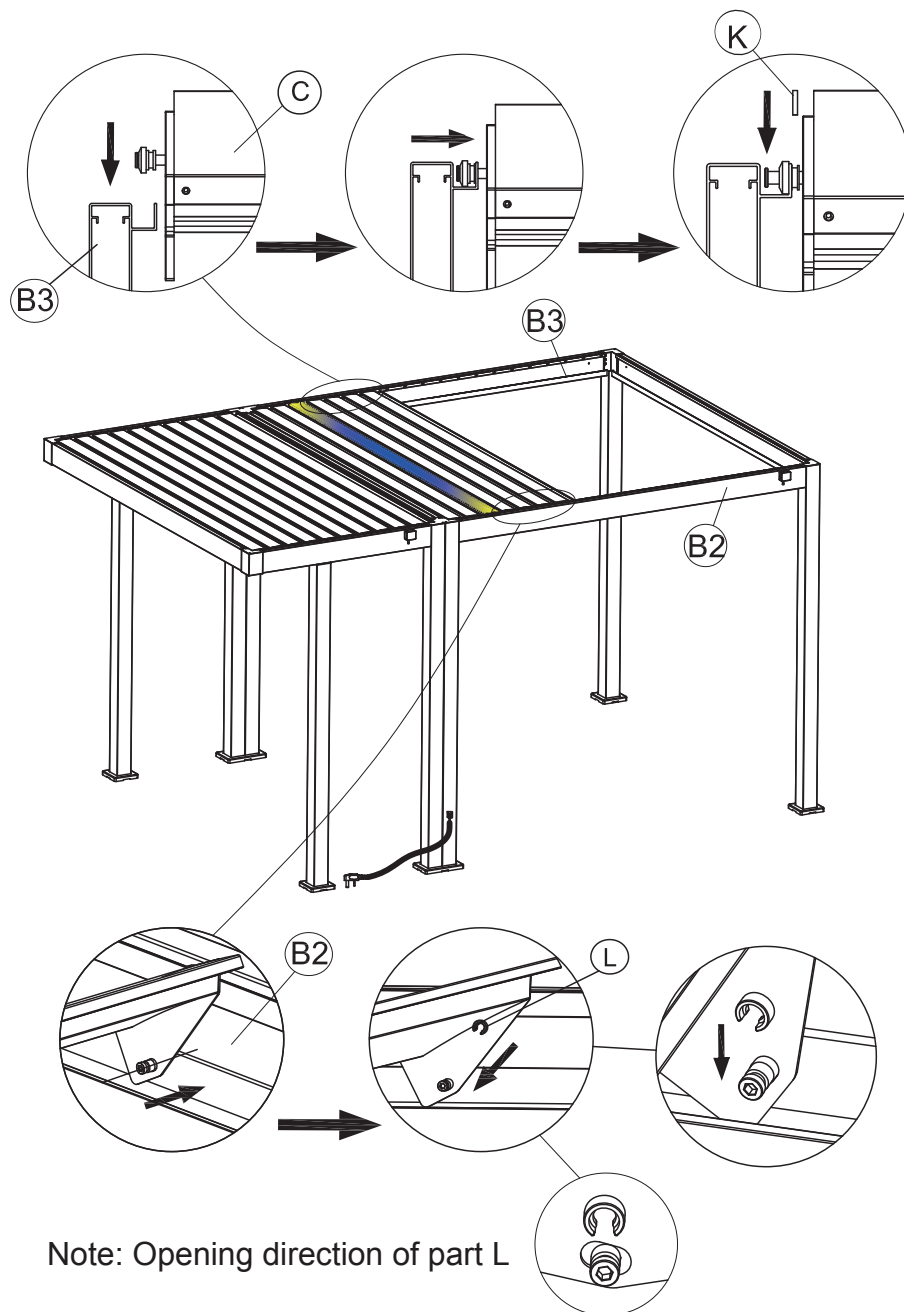

Insert 4 Louvres (C) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louver.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 53

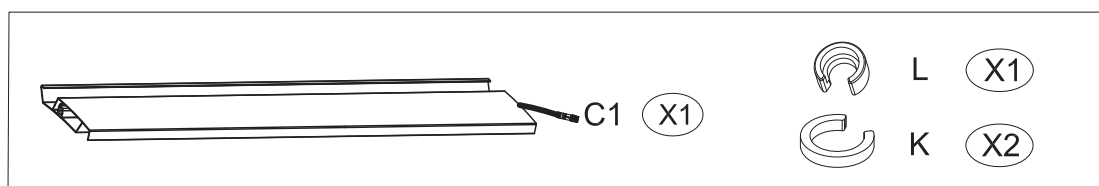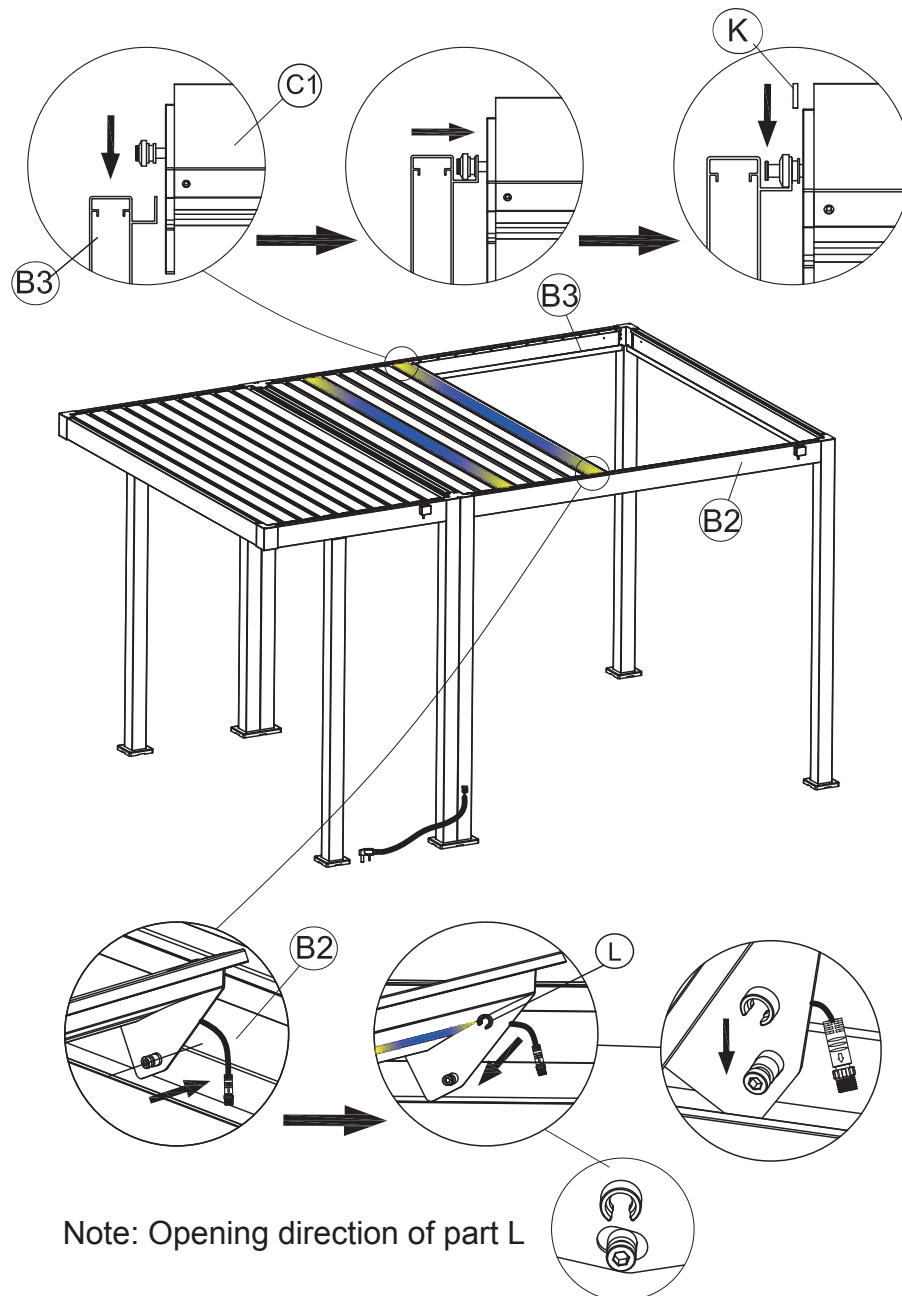

Insert a Light Louvre (C1) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 54

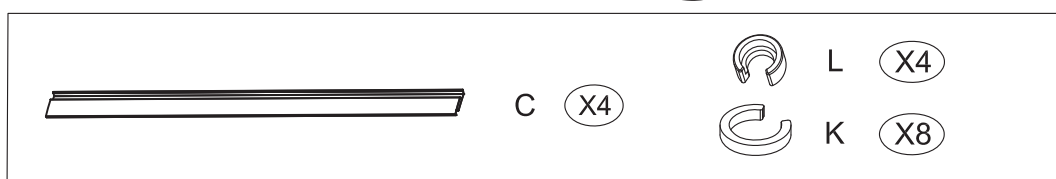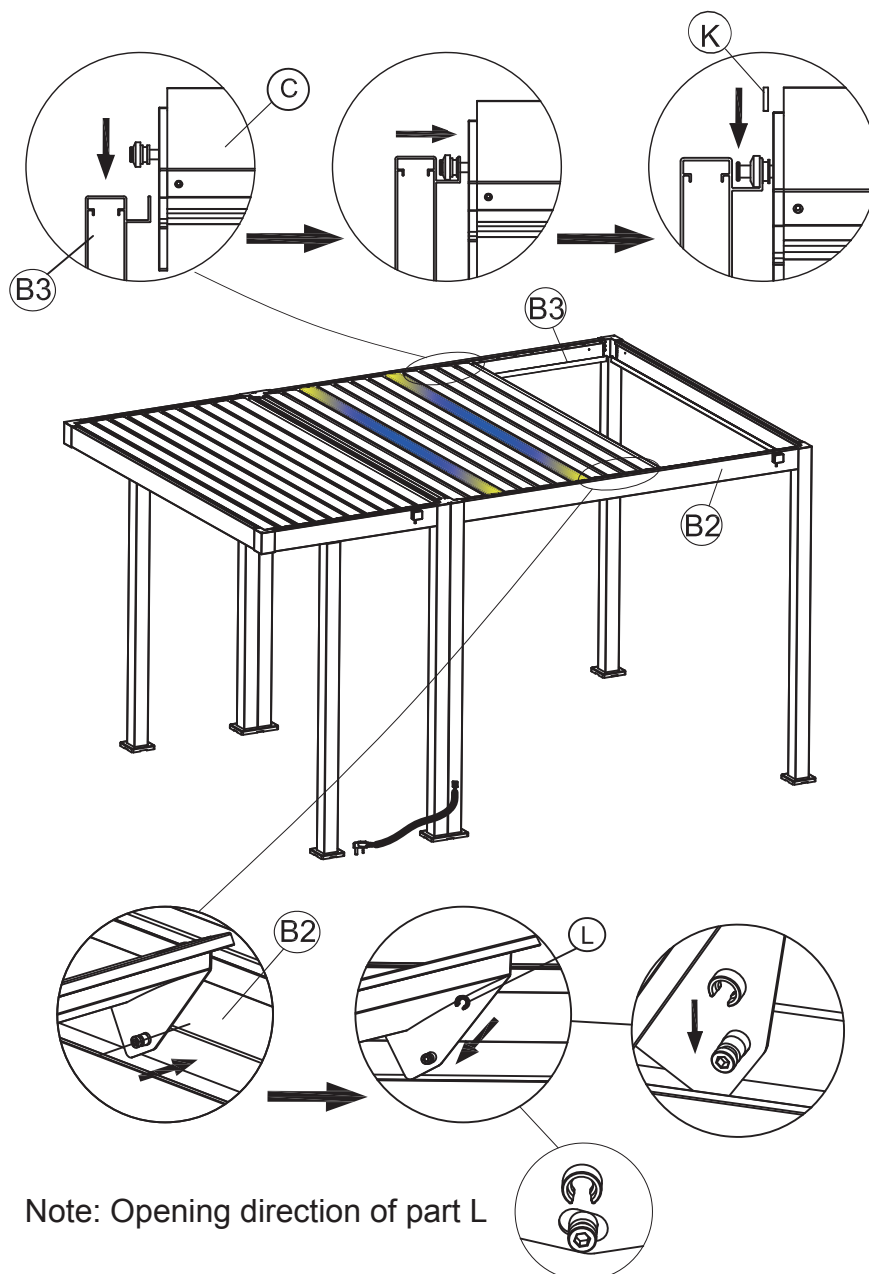

Insert 4 Louvres (C) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.


Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.


Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 55

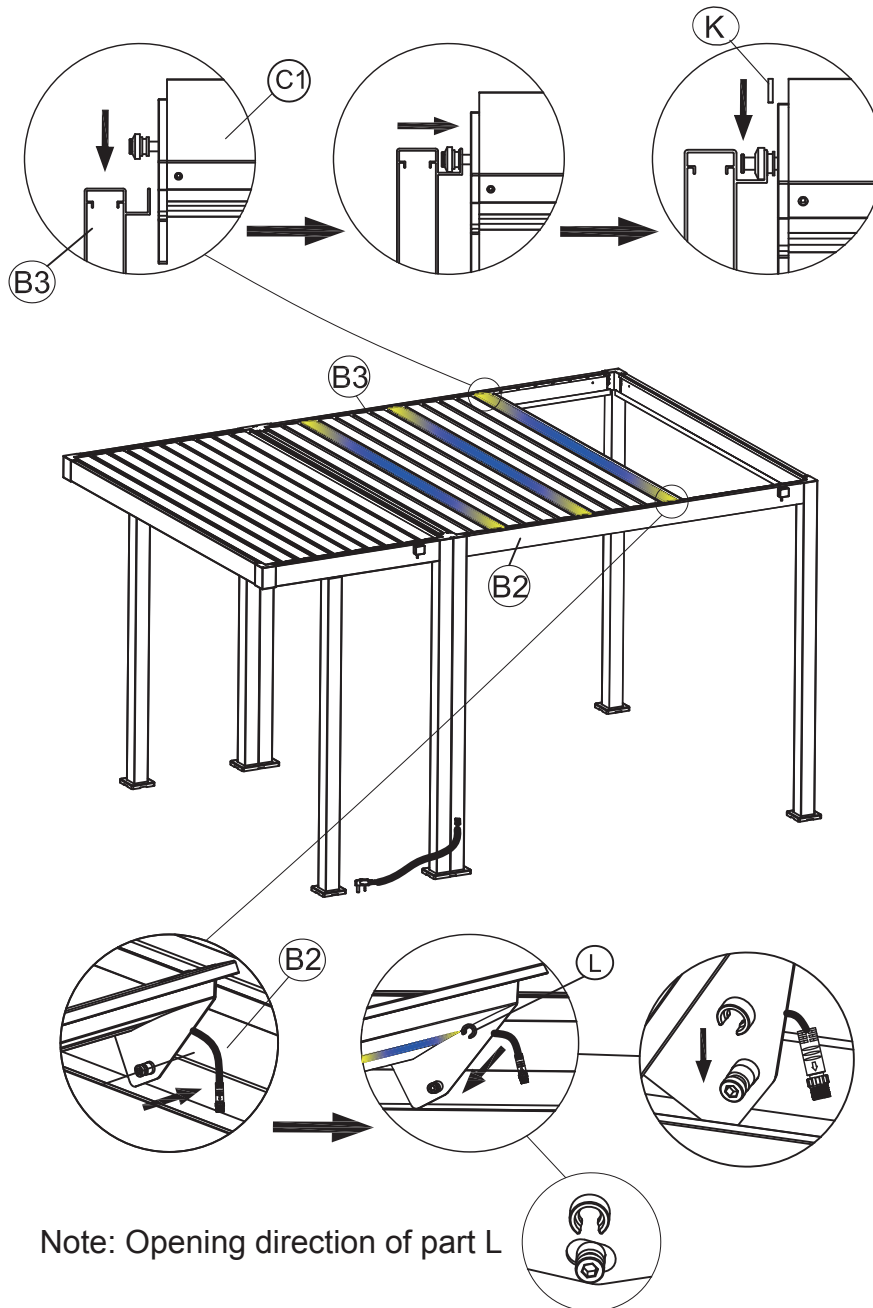

Note: Opening direction of part L

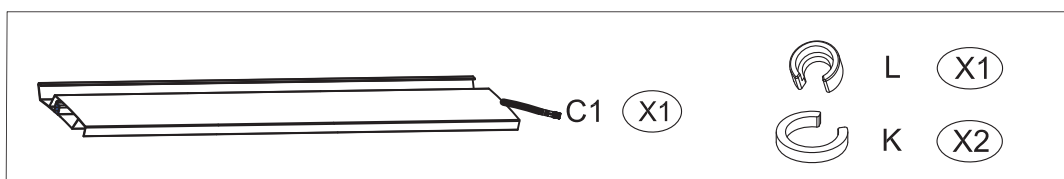

Insert a Light Louvre (C1) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 56

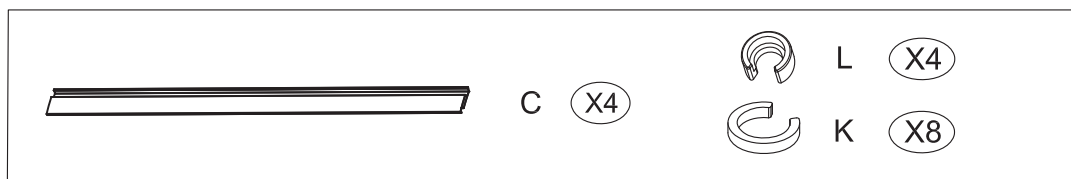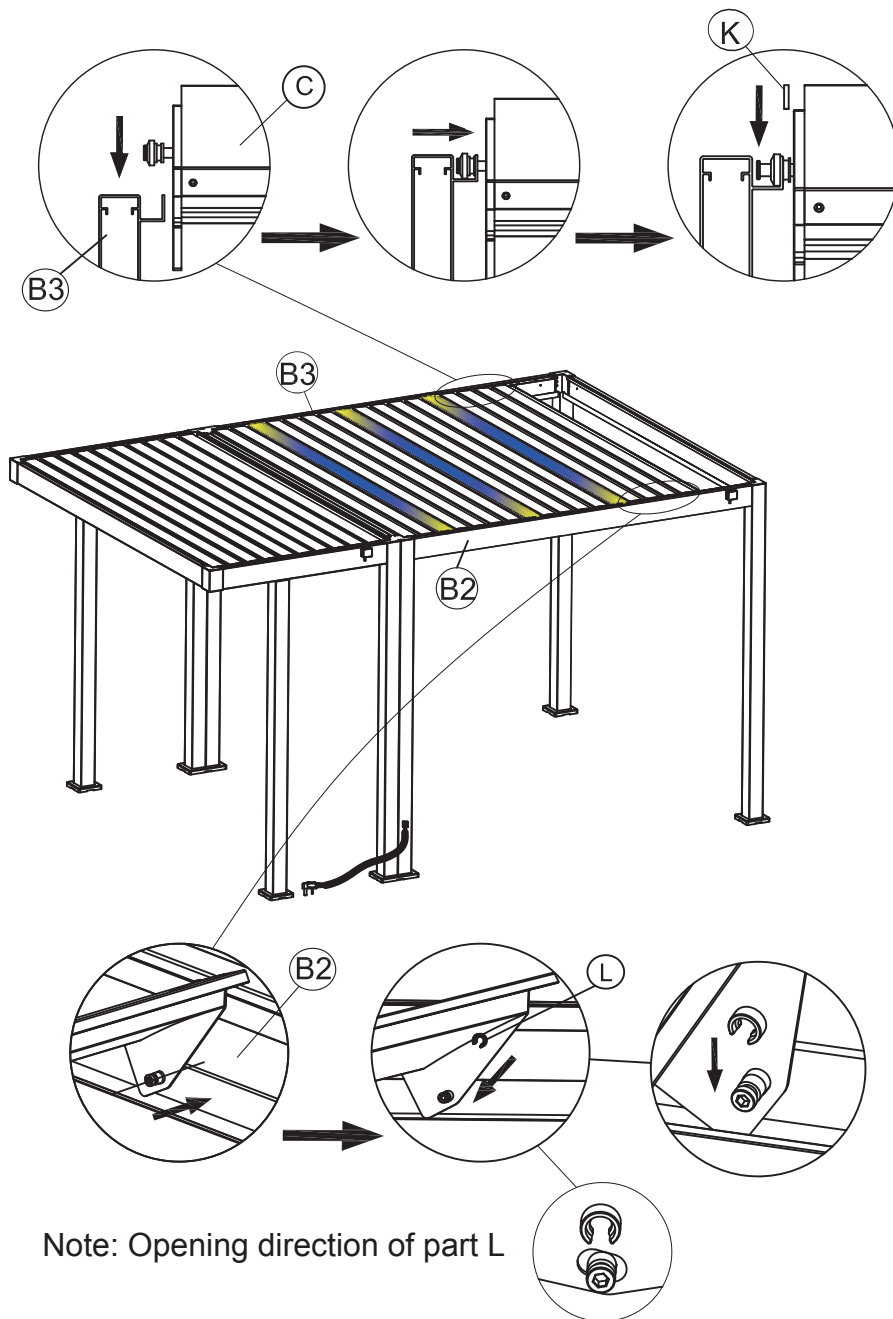

Insert 4 Louvres (C) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.



Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 57

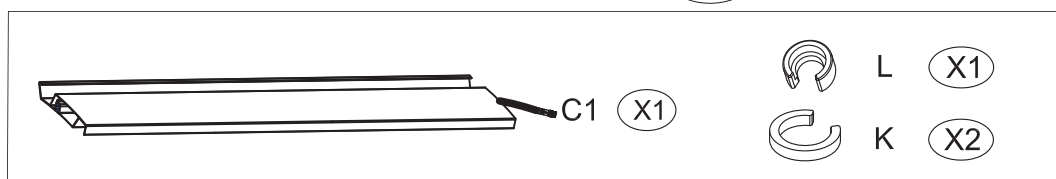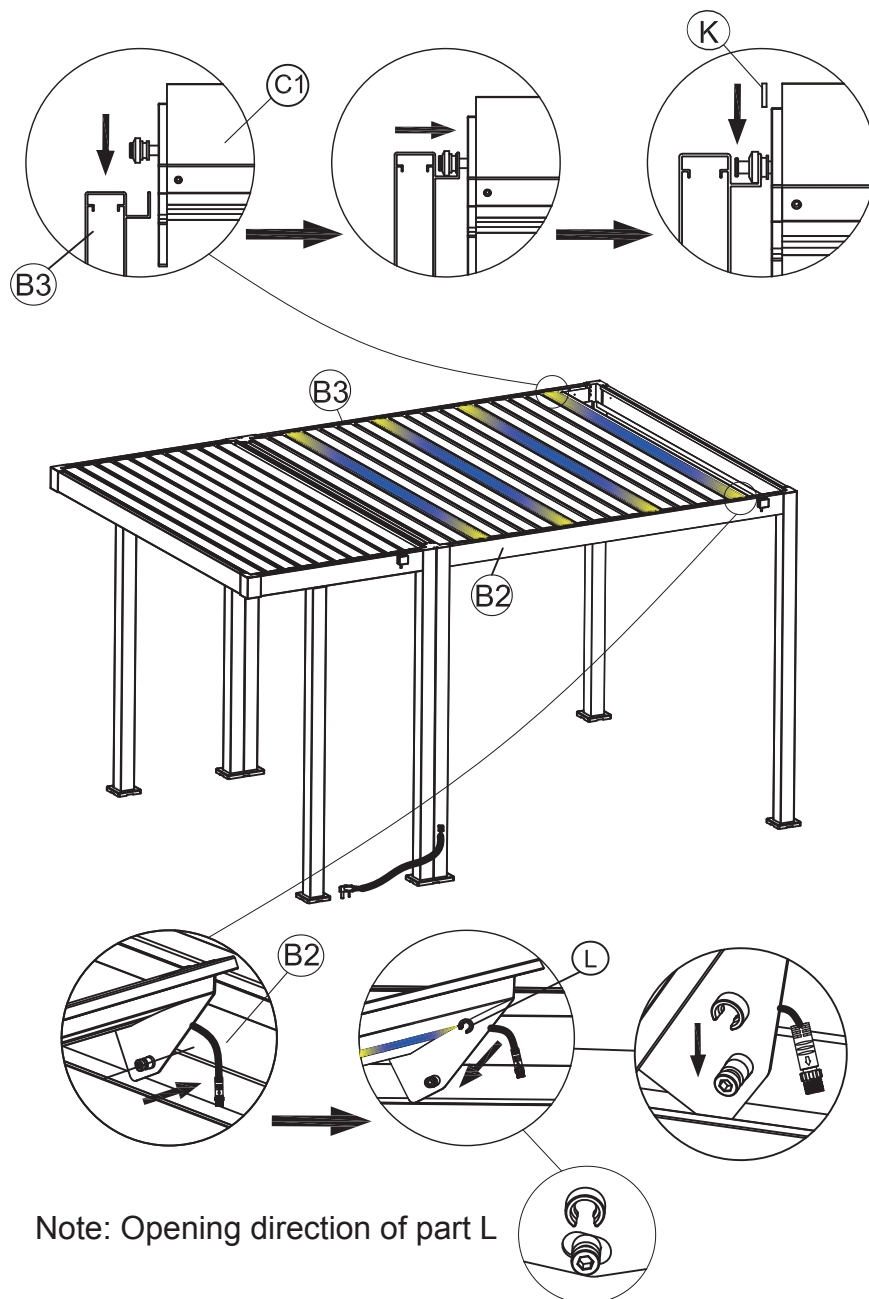

Insert a Light Louvre (C1) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.


Attach the Cap (K) on both sides of the louvre.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.


Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 58

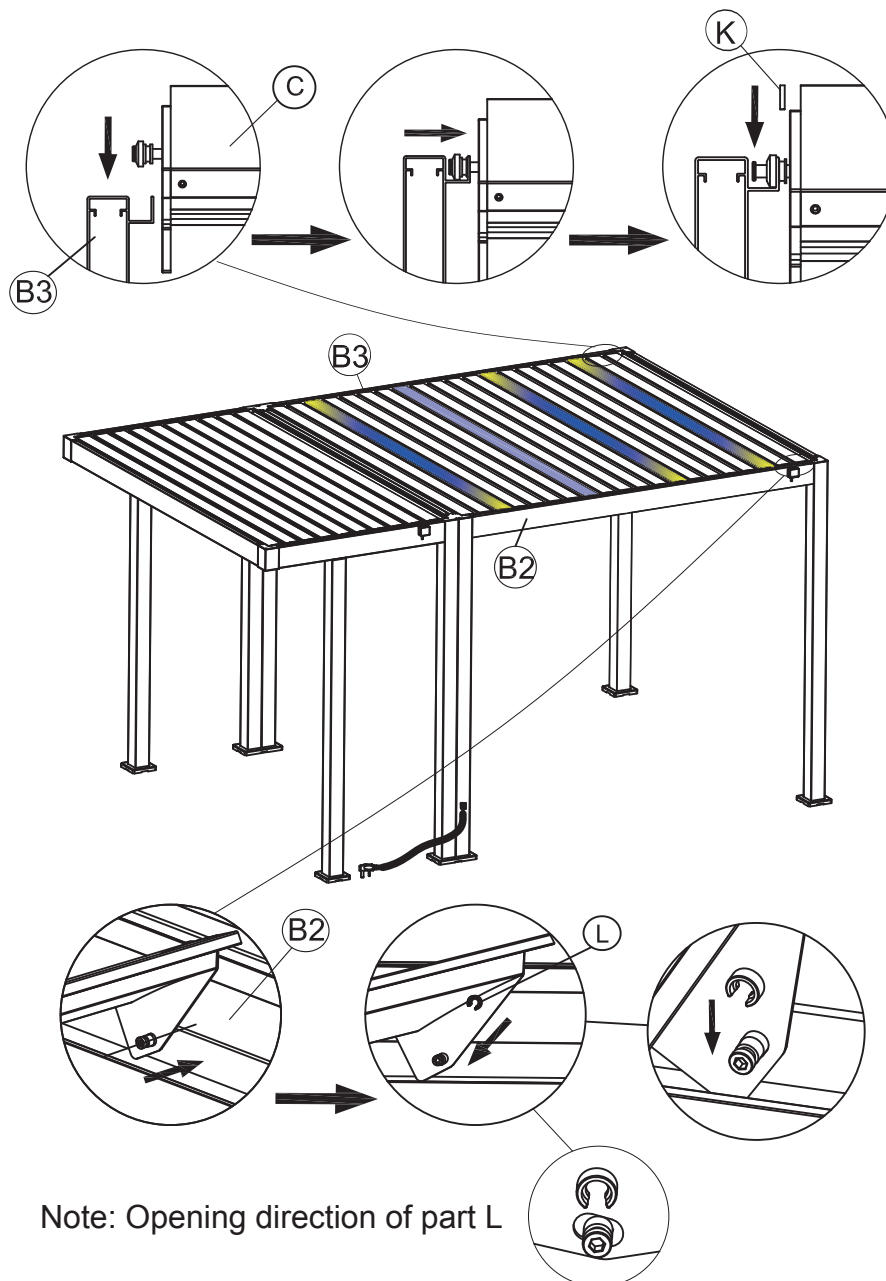

Note: Opening direction of part L

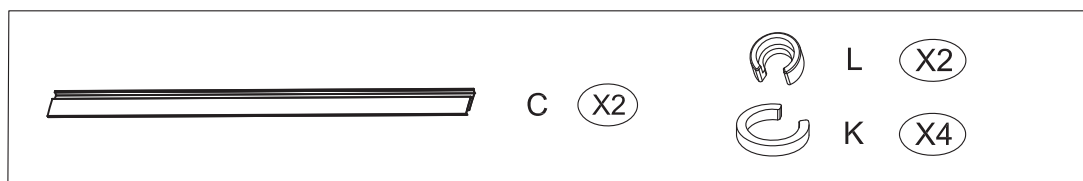

Insert 2 Louvres (C) between the Right Beam Tube (B2) and Left Beam Tube (B3) and secure it as shown.


Attach the Cap (K) on both sides of the louver.

Install the Part L locks on the Right Beam Tube (B6) as indicated in the diagram, making sure the opening direction is correct.

Tighten all the components securely.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 59

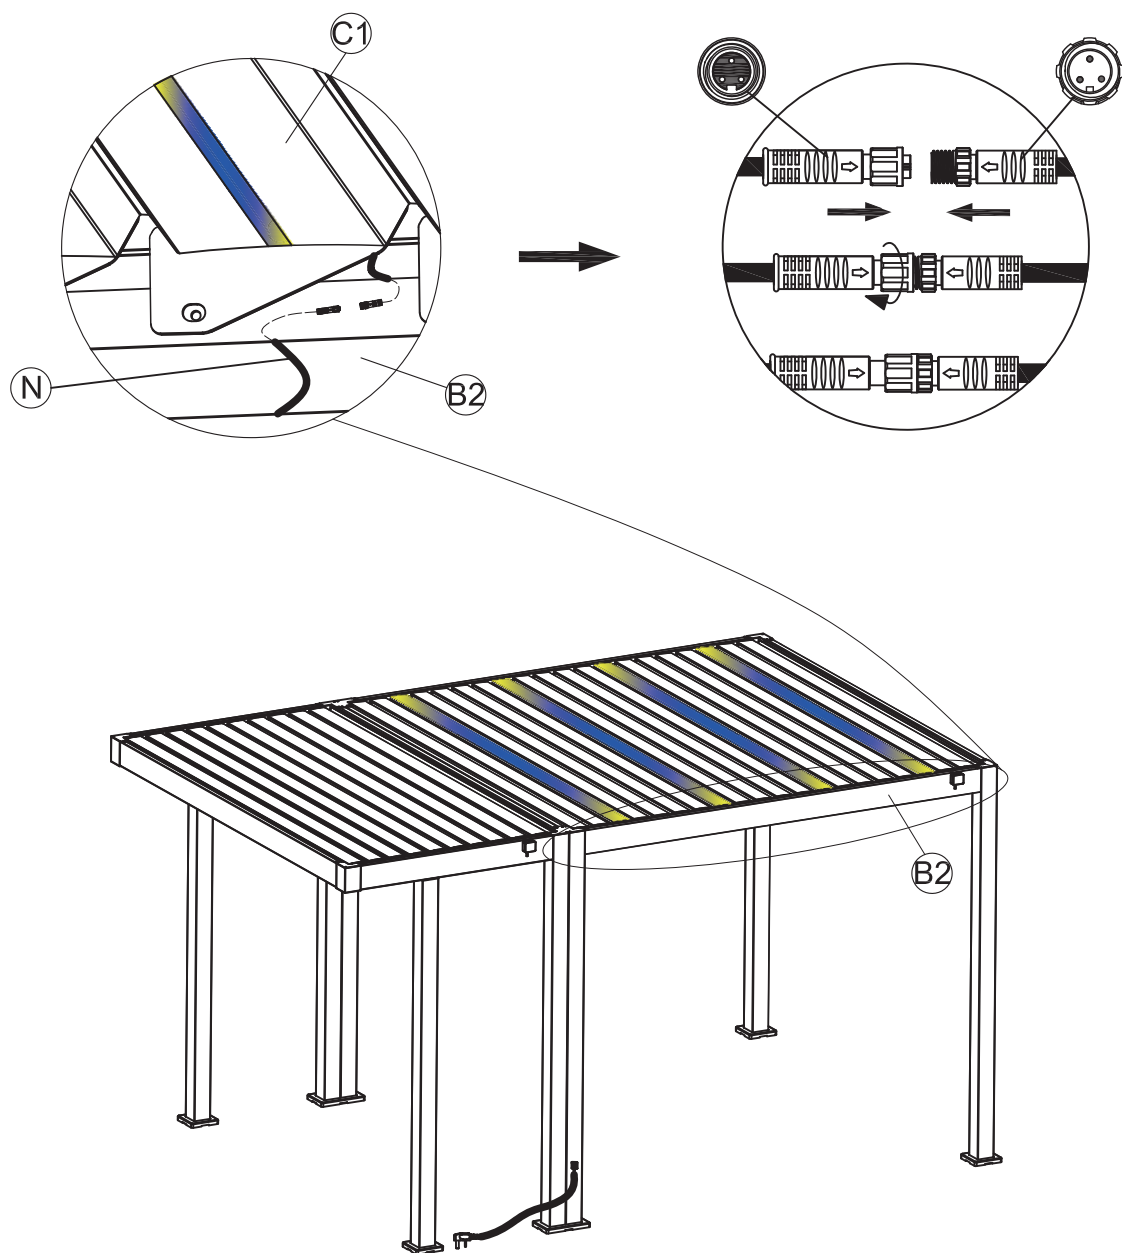


Locate the wiring Part N and ensure it is properly aligned with the connectors inside the Right Beam Tube (B2).

Insert the wiring into the appropriate connectors, as shown in the detailed view. Ensure all connections are secure and the wiring is properly fastened.


PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 60

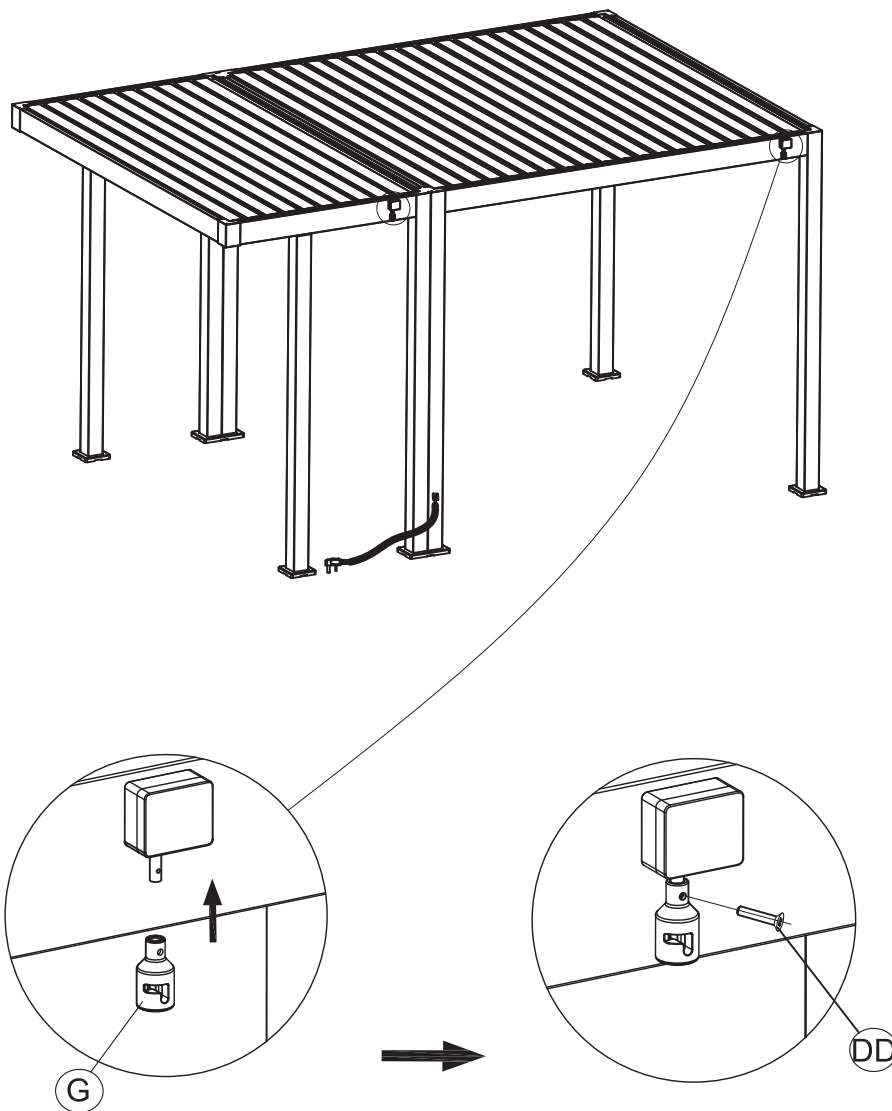

G

X2



M5*18


DD

X2

Attach Turbo Motor (G) to the designated area on the structure as shown.
Secure the motor using the M5*18 Screw (DD).
Ensure the motor is properly fastened and aligned for smooth operation.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT
ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 61

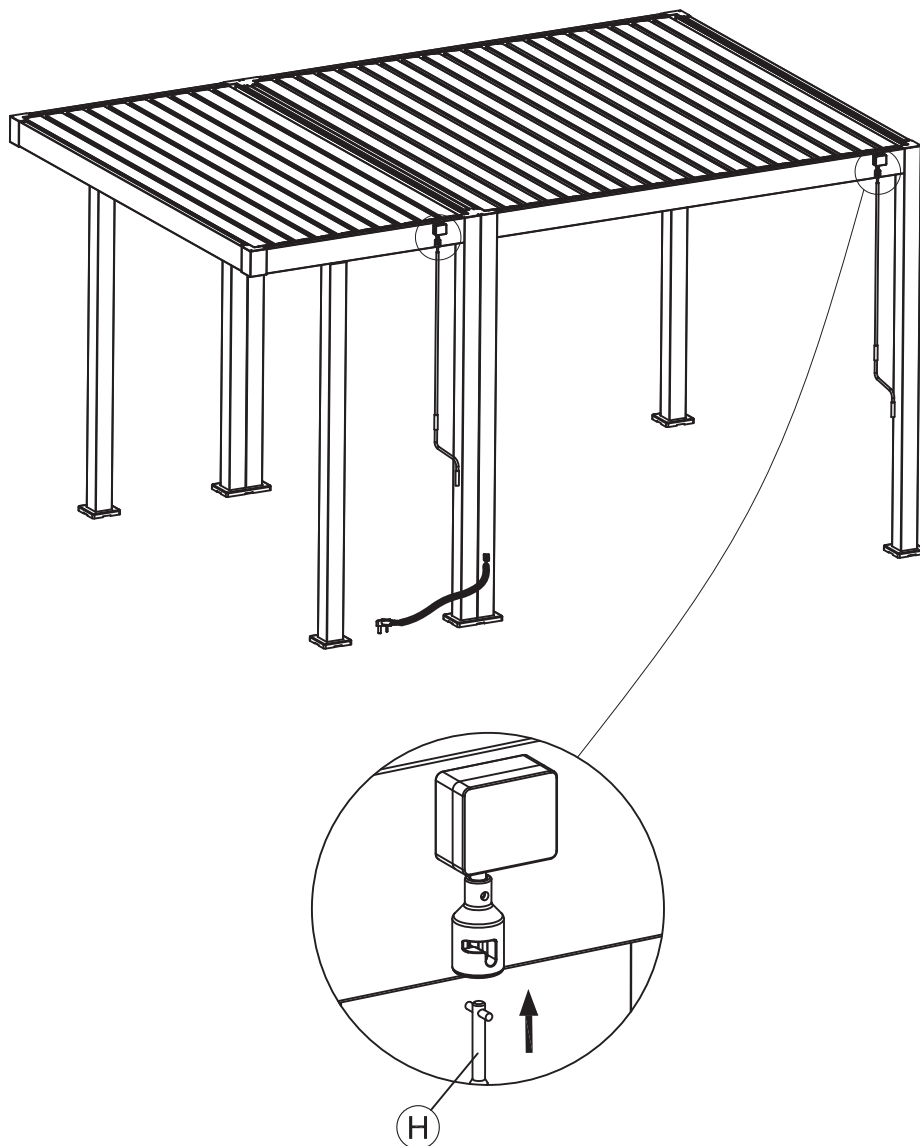


H (X2)

Insert the Rocker Handle (H) into the Turbo Motor as shown.
Ensure the handle is securely in place and properly aligned for smooth manual operation of the louvre system.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.

STEP 62

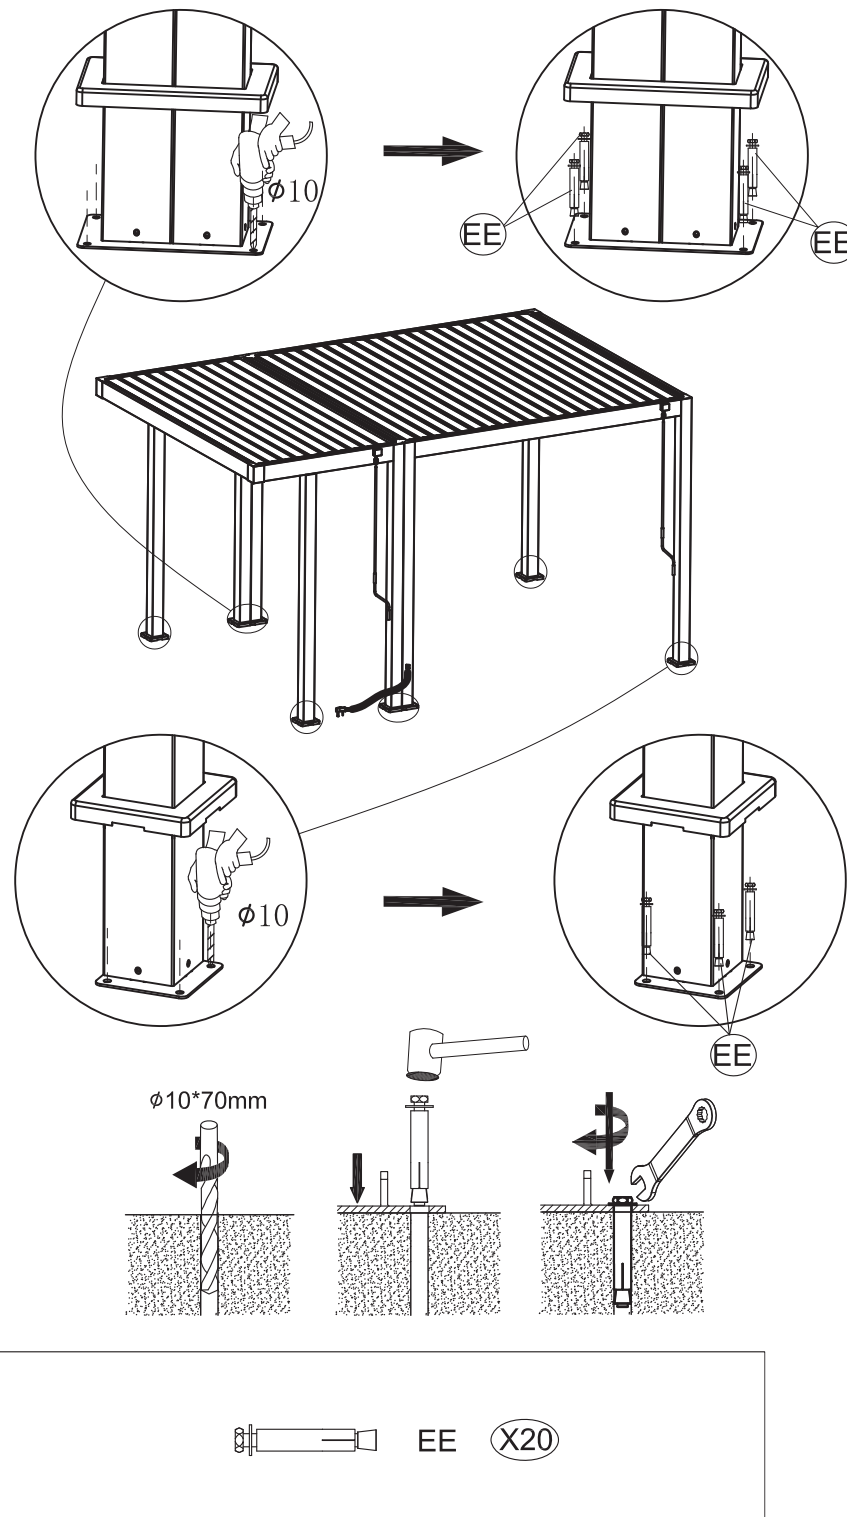

Drill holes into the ground using a 10 mm drill bit to a depth of 70 mm at the locations where the legs will be anchored.

Align the holes in the footplates of the structure's legs with the drilled holes in the ground. Insert the Expansion Screws (EE) into the drilled holes.



Use a hammer to tap the screws into place, and then tighten the screws with a wrench to securely anchor the structure.

PLEASE ENSURE ALL FIXINGS ARE LEFT LOOSE DURING ASSEMBLY BUT ARE SECURELY TIGHTENED UPON COMPLETION.


Important Notes

1. During the snowy season or when snow is forecasted, open the louvres to keep them vertical to avoid any damage to the pergola. If there are any debris or leaves on the top shutter, please take care to clear them in time to prevent the shutter from closing poorly or even failing to close.

2. When opening/closing the louvres, please make sure the rocker stays in a vertical position next to the pole, and do not move the rocker too far away from the pole.

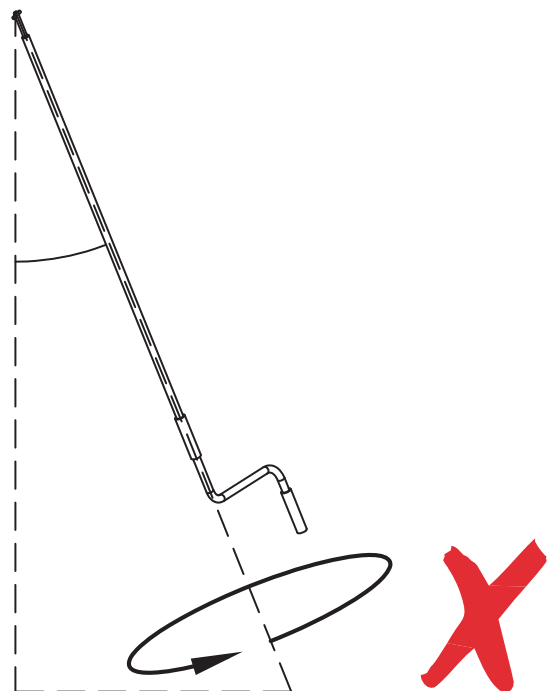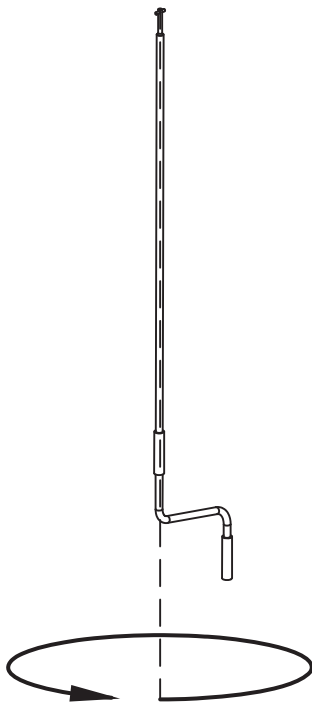


3. To open the louvre, turn the rocker handle clockwise; to close the louvre, turn the rocker handle anti-clockwise.

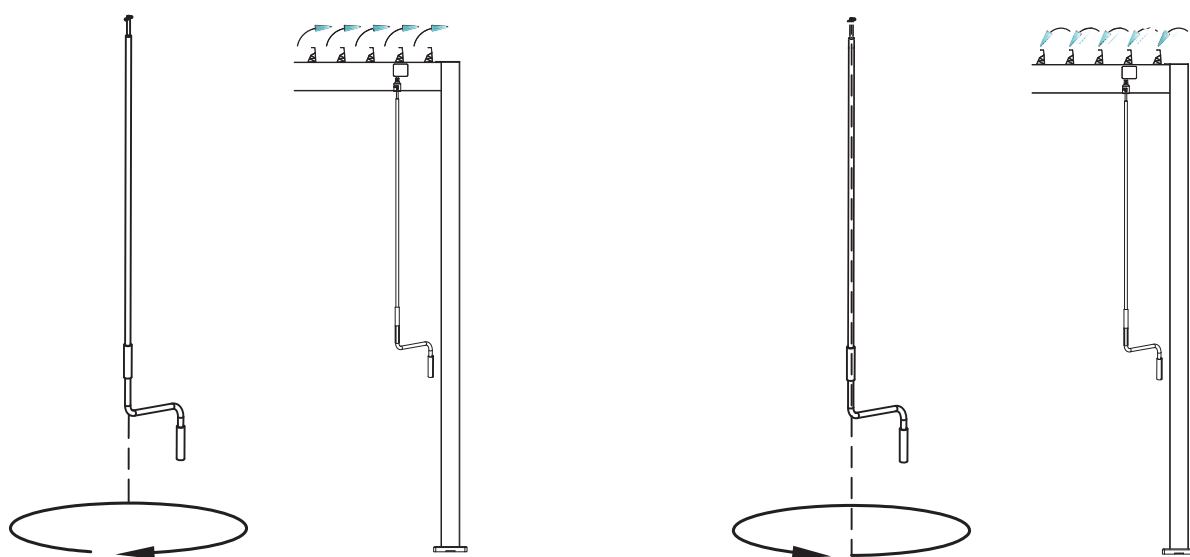


Remote control operating instructions


1. Remote control code setting

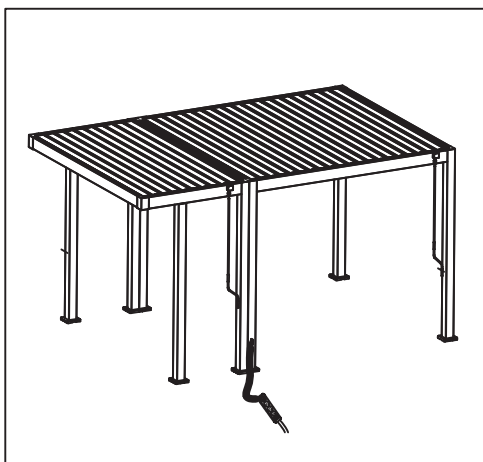

Plug in the socket and connect the power supply



Press and hold the button ① for 10 seconds, then press the light button ②

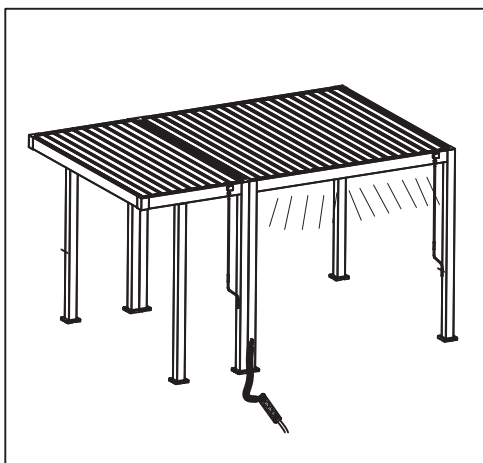

Then the light will come on, which means that the code is set successfully.


The code setting is only necessary when using the product for the first time, or after changing the remote control.

2.Operating Instructions

First press ①, then press ② to open the light channel.

③ Close the light

④ ⑤ Adjust the light brightness (multi-position)

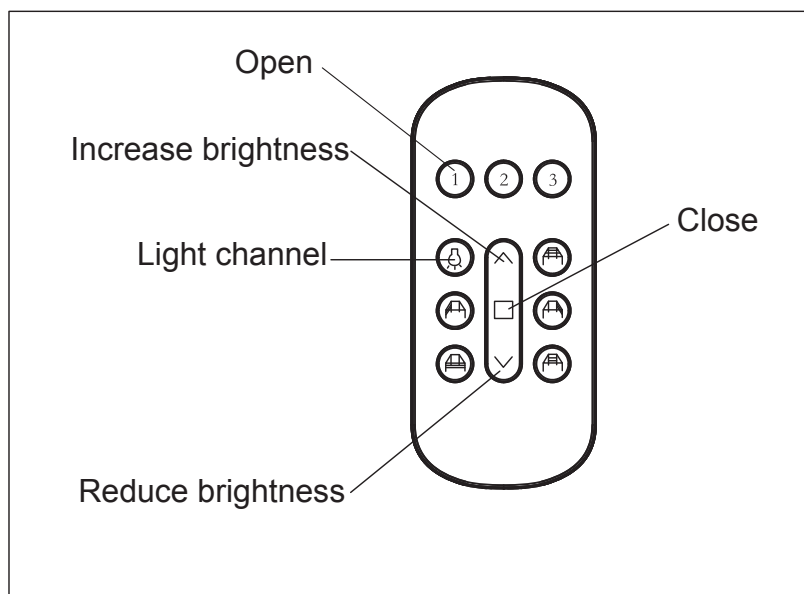

General Warranty Conditions

The warranty applies to the original purchaser from the date of purchase and covers manufacturing faults and defects only. If an item should fail as a result of a manufacturing fault or defect under normal domestic use, the manufacturer at their discretion will repair, refinish or replace the failed item.

The manufacturer reserves the right to substitute failed items with a similar product should the model or colour no longer be available. Any replacement will be for the failed item only, not a complete set. The original warranty period is not extended in the event of a repair, refinish or replacements.

In the event of a failure, it is the customer's responsibility to return the item to the store of purchase along with a copy of the receipt. LG Outdoor will confirm that

- **3 Year Limited Warranty – on the aluminium frame, excluding damage caused by corrosion, scratching, pitting, flaking, or oxidization.**
- **1 Year Limited Warranty – on the adjustable roof slats.**
- **1 Year Limited Warranty – on all other materials and moving parts.**

LEISUREGROW 

Dewmead Farm
New Inn Road
Hinxworth
SG7 5HG
consumer@leisuregrow.com