


Product information	- Indoor use only - Dimmable - When used with dimmable bulbs - Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands - Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish - Glass parts - Remove and use a damp cloth. Do not use abrasive materials as these will damage the finish. Take care when handling glass parts to avoid damage or injury
---------------------	---

Aftercare and Troubleshooting	You've switched on the light, but it's not working: 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.
-------------------------------	--

Specification	Max power: 6 x 6W Recommended bulb: 6W LED E14 Candle bulb for maximum brightness. Lower wattages are also suitable. Rated input: 220 –240V, 50Hz Bulbs not included IP rating: 20 Weight: 5.0kg
---------------	--

5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.
------------------	--

Recycling	This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.
-----------	---

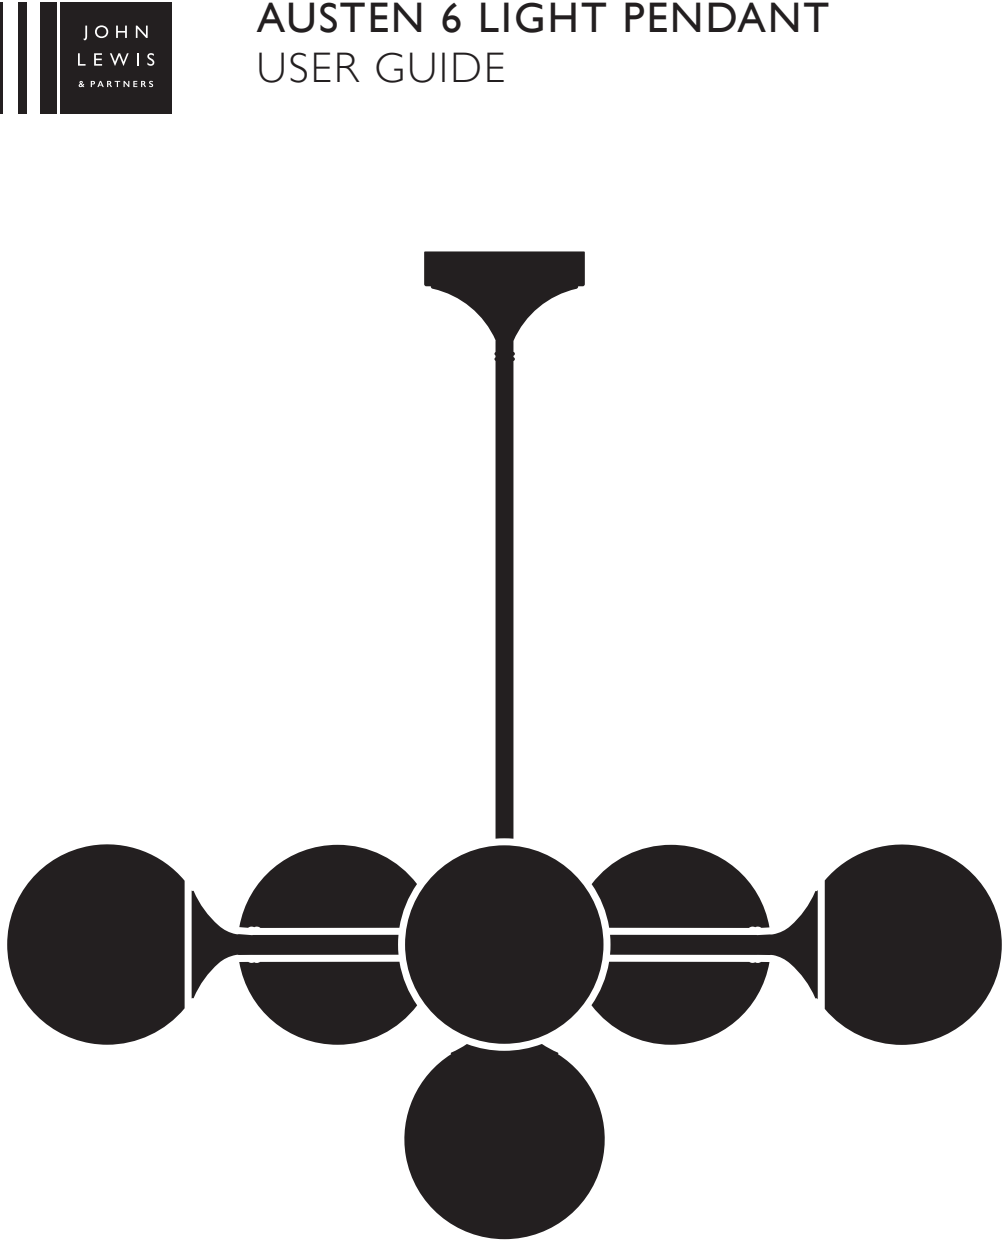

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 Amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

Dispose of used bulbs carefully.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

This product contains glass so care must be taken when fitting or handling to prevent personal injury or damage to the product.

For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing shades.

Parts list

Description	Image	Quantity
Light fitting		x 1
Shades		x 6
Wall plugs		x 2
Screws		x 2

Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Remove the protective plastic end-cap from the end of the stem (1) and remove the fixing bracket (A) from the product by unscrewing the two side screws (B). Retain the screws for reuse.

Step 3

Attach the stem by screwing it in a clockwise direction, into the threaded part of the body (C). Pull any excess cable up through from the top of the ceiling cup. It maybe necessary to turn the stem anticlockwise before fixing into place to avoid twisting the internal cable. Check that the stem is securely attached before proceeding.

The height of the product can be shortened by removing the stem (see fig. 1).

Please note: The cables will need to be shortened and the excess cable cut and re-connected to the terminal block. This must be done by a qualified electrician.

Step 4

Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (D) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes. Fix the bracket to the ceiling using supplied screws (E).

Please note: This is a heavy product and appropriate ceiling fittings **MUST** be used to support the weight.

Step 5

Having identified the household wiring from your existing light fitting, connect the house wiring to the connection block - see wiring diagram (F). Connect Live cable to terminal marked 'L' and Neutral cable to terminal marked 'N'.

NOTE: This is a Class II fitting and must NOT be connected to earth. Check that...

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

Make sure the lid of the connection box is securely fixed.

Step 6

Reattach the product to the fixing bracket using the two screws removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 7

Fit the recommended bulbs (G) as per the details overleaf.

Step 8

Attach the glass shades (H) by screwing onto threaded lampholders in a clockwise direction. Tighten with light pressure. Periodically check the secure fit of the shades.

Your light is now ready for use.

Fig. 1