

Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 3 x 10W
Recommended bulb:
10W LED E27 GLS bulb for maximum brightness.
Lower wattages are also suitable.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 20
Weight: 2.10kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China

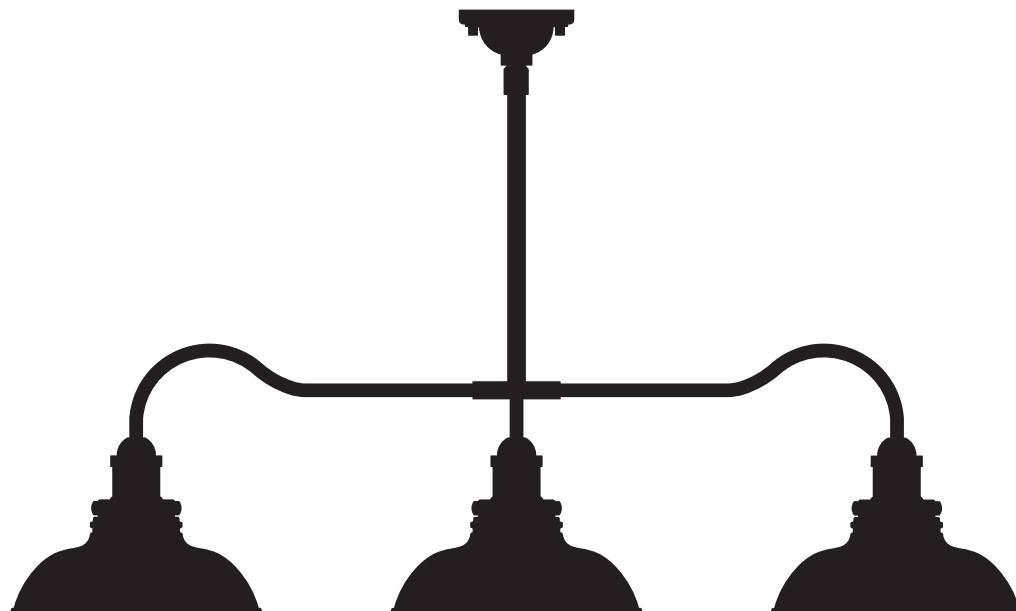


12/03/2026

Please retain these instructions for future reference.



BALDWIN 3 LIGHT PENDANT USER GUIDE



Product Code:
70159801
70159802

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 Amp fused circuit.

If replacing an existing fitting, make a note of the connections.

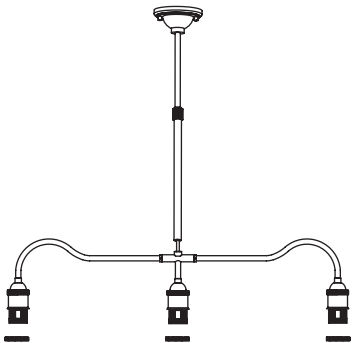

Always use the correct type and wattage bulb. Never exceed the wattage stated.

Dispose of used bulbs carefully.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing shades.

Parts list

Description	Image	Quantity
Light fitting + x 3 shade rings (fitted)		x 1
Metal toppers		x 3
Shades		x 3
Hex key		x 1
Wall plugs		x 2
Screws		x 2

Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Remove the ceiling cover (A) from the product by unscrewing the two finials (B) and retain for reuse.

Step 3

Attach the stem by screwing it in a clockwise direction, into the threaded part of the body (C). Pull any excess cable up through from the top of the ceiling cup. It maybe necessary to turn the stem anticlockwise before fixing into place to avoid twisting the internal cable. Check that the stem is securely attached before proceeding.

Step 4

The height of the product can be adjusted by loosening the grub screw (D) then twisting the collar (E) on the stem and withdrawing the inner stem to the appropriate height. When reducing the height make sure to pull any excess cable through the ceiling cup. Re-tighten the collar by hand and use the grub screw and hex key (F) to secure.

Step 5

Ensure there is a solid mounting surface to support the weight of the light fitting. Using the ceiling cover as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (G) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes. Fix the cover to the ceiling using supplied screws (H).

Step 6

Having identified the household wiring from your existing light fitting, connect the house wiring to the connection block - see wiring diagram (I). Connect Live cable to terminal marked 'L' and Neutral cable to terminal marked 'N'.
NOTE: This is a Class II fitting and must NOT be connected to earth. Check that...
You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.
Make sure the lid of the connection box is securely fixed.

Step 7

Reattach the product to the ceiling cover using the two finials removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 8

Remove the shade rings (L) from the threaded lampholders. Place the metal toppers (J) over the lampholders, followed by the shades (K) and secure in place by refitting the shade rings. Tighten with light pressure to secure in place

Step 9

Fit the recommended bulbs (M) as per the details overleaf. Your light is now ready for use.

