

Product information


- Indoor use only
- Dimmable (dimmer not included)
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 28.5W
Rated input: 220 –240V, 50Hz
IP rating: 20
Weight: 2.55kg
Lumen output: 1500
Colour temperature: Warm white (3000K)
This product contains a light source of energy efficiency class E
For further information please visit: www.lighting-info.co.uk/122830



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China




21/04/2026

Please retain these instructions for future reference.



VINA LED BAR PENDANT USER GUIDE

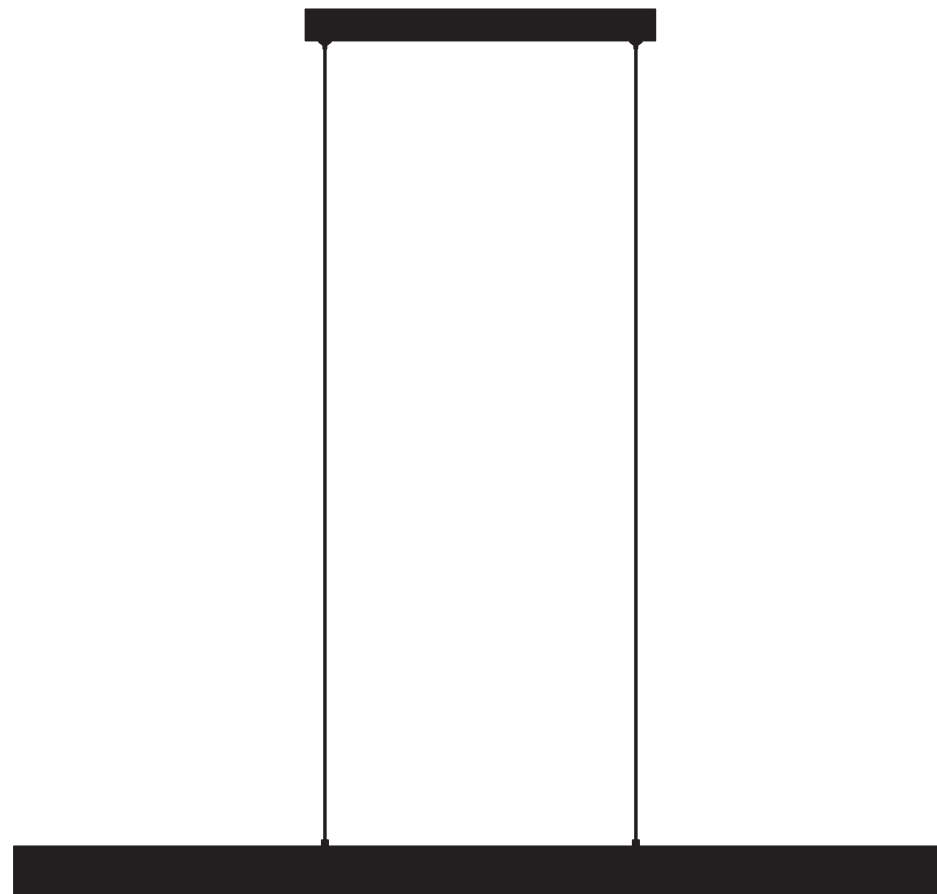

Product Code:
70146403



Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 Amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). When moving or cleaning, always switch off at the mains and allow the product to cool before handling.

Parts list

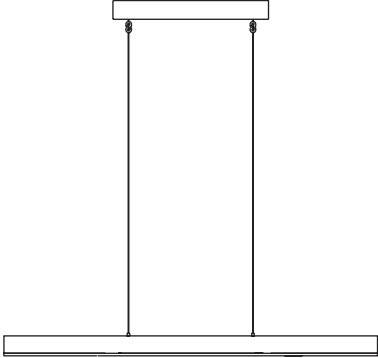Description	Image	Quantity
Light fitting		x 1
Hex key		x 1
Wall plugs		x 2
Screws		x 2

Troubleshooting

If the pendant does not remain in position after height adjustment, you may need to adjust the tension in the pulley mechanisms – this must be done before installing the light. See Step 3 opposite.

Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Remove the fixing bracket (A) from the product by undoing the two side screws (B) and retain for reuse. Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (C) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes. Fix the bracket to the ceiling using supplied screws (D). **Please note:** make sure to attach using the outer most holes on the bracket.

Step 3

The height of this rise-and-fall pendant can be adjusted. Just pull the pendant downward gently, or push up (see fig. 1). This can be done at any time after the product is installed, however ensure that the following checks are performed beforehand.

With help of an assistant hold the pendant up by the ceiling cover in a suspended position while the assistant pulls the pendant down and releases it. If the pendant remains in the same position once let go – the pendant is ready to install. If the pendant starts dropping once released, the tension on the pulley mechanism is too low and needs to be adjusted on the lifters (E) inside the ceiling cover. Use the supplied hex key (F) at the hole in the lifter marked 'Tension' and rotate clockwise.

Note: tighten fully but if the tension should become too tight just push the 'Release' button (G) and the tension will be re-set to the minimum. The mechanism will then need to be re-tightened to the desired strength again.

Test the tension of the cables again until the pendant pulls easily and remains in the same position once let go.

Step 4

Having identified the household wiring from your existing light fitting, connect the house wiring to the connection block - see wiring diagram (H). Connect Live cable to terminal marked 'L' and Neutral cable to terminal marked 'N'.

NOTE: This is a Class II fitting and must NOT be connected to earth. Check that...

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block. Make sure the lid of the connection box is securely fixed.

Step 5

Reattach the product to the fixing bracket using the two screws removed in step 2 and tighten to secure. Take care not to trap any wiring.

Remove the cable protectors (I) from the top of the cables and keep in a safe place. If the product is ever removed, these will need to be refitted in order to keep the cables straight. Your light is now ready for use.

