

## DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



- Linear design with 880 mm width and minimum depth of 260 mm
- Modern touch controls on glass front
- LED strip for uniform lighting
- Wide rack – can be used as a shelf for herbs, for example
- Efficient filtration- 10-ply stainless-steel grease filter



EAN: 4002516798620 / Material number: 12526670 /  
Old Material Number: 28909240GB

General information	
Model identifier	DA 9092 W Screen
Manufacturer material number	12526670
EAN number	4002516798620
Marketing class	Silver
Construction type	
Wall mounted cooker hood	•
Appliance type and design	
Appliance colour	Obsidian black
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 29
User convenience	
Electronic controls	•
Touch controls	•
Controls	Touch-on-glass controls
Power levels (number without Booster level)	3
Booster levels	1
Silence package	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	B
Annual energy consumption in kWh/year	67.7
Fluid dynamic efficiency class	B
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3,2 W
Light intensity in lx	300 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	205
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	310
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	415
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	670
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	39.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	62.0

## DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



EAN: 4002516798620 / Material number: 12526670 /  
Old Material Number: 28909240GB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	190
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	290
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	385
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	605
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	44.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	51.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	58.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	69.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	44.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	55.0
<b>Safety</b>	
Safety switch-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Canopy width in mm	880
Overall hood height for extraction mode and external in mm	500
Overall height for recirculation mode cooker hoods in mm	500
Overall height for vented and external in in. (mm)	500
Overall height for extraction mode and external mode cooker hoods in mm	500
Canopy height in mm	500
Overall height for recirculation in in. (mm)	500
Canopy depth in mm	260
Overall height for recirculation mode cooker hoods in mm	500
Net weight in kg	21.5
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.




EAN: 4002516798620 / Material number: 12526670 /  
Old Material Number: 28909240GB

Total rated load in kW	0.20
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
<b>Installation notes</b>	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
<b>Accessories included</b>	
Non-return flap	•

## DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.

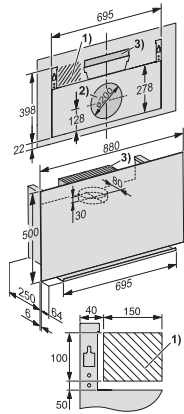

DA9091W, DA9092W (Installation drawings)

1) Installation area for the mains connection., 2) Cut-out when ducting to the rear. Alternative vent connection at the back., 3) Air outlet for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.,