

## Recommended bulb (not included)

1x 9W ES LED GLS

or

1x 42W ES eco halogen GLS

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

## Specifications

Max. power: 60W

Voltage: 240V, 50Hz


IP rating: IP20

Weight: 0.75kg



Please keep these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)


Made in China

John Lewis

User manual

Conrad

Flush light

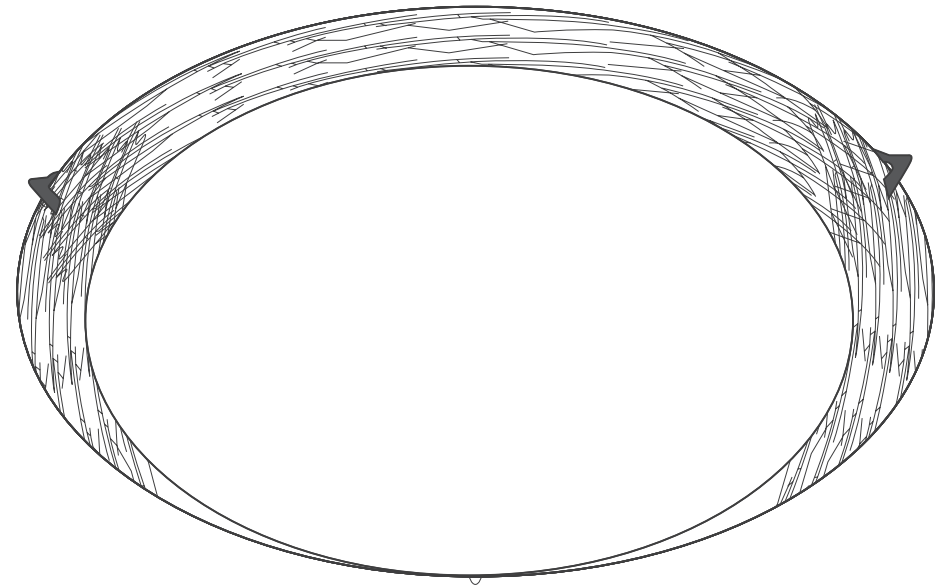

14/05/2019

Thank you for purchasing this Conrad flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

## Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.





If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

For your safety, always switch off the supply before cleaning or removing the shade.

Parts list	Image	Qty
Light fitting		1
Screws		3
Wall plugs		3
Spare Terminal Block		1

## Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

### Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.** Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires.


**The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**

### Step 2

Locate the ceiling plate to the ceiling. Ensuring that the product will be fixed to a joist, mark the position of the fixing holes. Drill the holes - fitting appropriate fixings for the mounting surface. Fix the ceiling plate to the ceiling using the screws supplied. Take care not to trap or damage any concealed wiring when drilling.

### Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way. An additional terminal block is supplied for the loop connection if required:

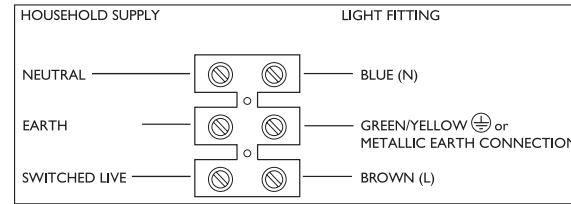

### Check that.....


You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

### Step 4

Locate the glass shade under two hooks and then pull the third spring loaded hook outwards until the glass shade will fit underneath it. Carefully release the hook so that it securely grips the shade. Check the shade is securely fitted.

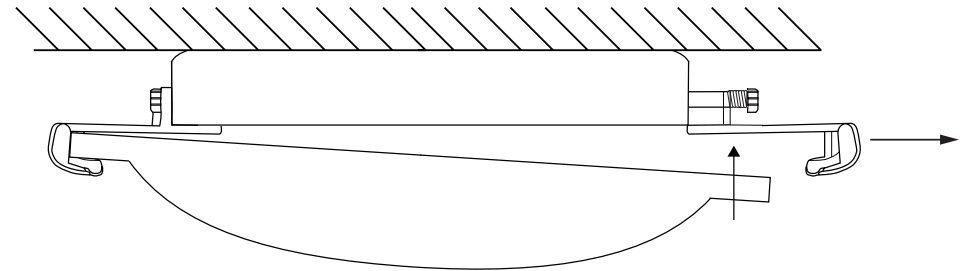

### Step 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

## Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.