

Recommended bulb

This product contains a non-replaceable LED Module. If the LEDs become damaged then the product must be replaced.

When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

Specifications

Max. power: 4.5W

Voltage: 240V, 50Hz

IP rating: IP20

Weight: 1.4kg



Please keep these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Tameo

Semi-flush light

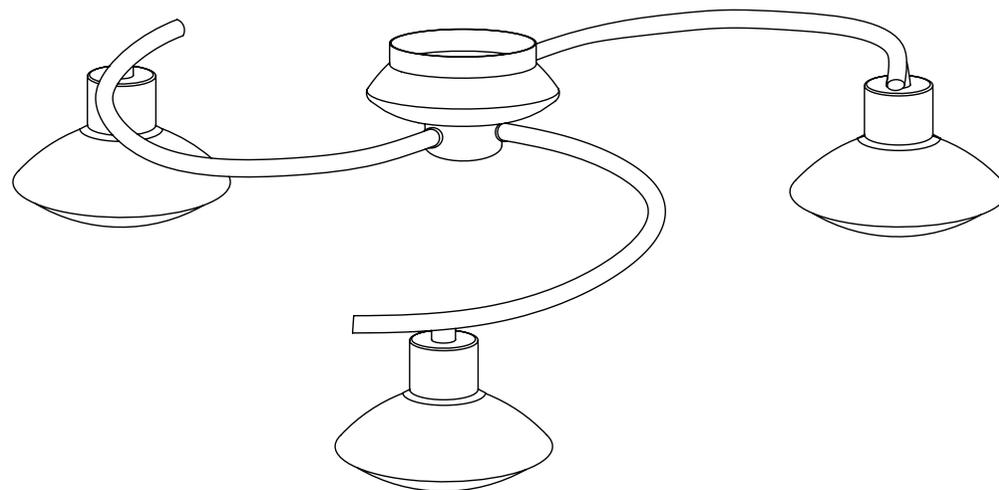

26/02/2019

Thank you for purchasing this Tameo semi-flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Parts list	Image	Qty
Light fitting		1
Screws		2
Wall plugs		2
Shades		3

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, **carefully note the position of each set of wires.**





Fig. 1

Step 2

See Fig 1. Remove the fixing bracket (A) from the ceiling cover by removing side screws (B) and attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 3

Having identified the household wiring from your existing light fitting, connect the terminal block to the light fitting and household supply, per the diagram below. When completed, ensure that there are no bare or loose strands of wire exposed.

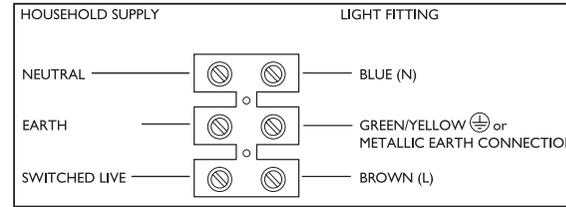

Check that


You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

Step 4

Refer to Fig 1. This product has "L" shaped fixing holes (C) to allow easy fixing to the ceiling strap (A). Locate the "L" slots around the small screws (B) on the ceiling strap. Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

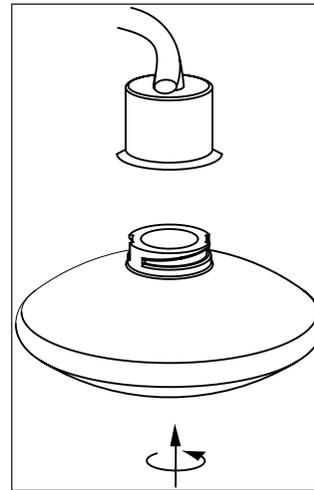

Step 5

Screw the shades into the cup on each arm. Do not overtighten.

Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.