Care instructions continued

In some cases, surface corrosion may arise after installation. This is normally caused by tiny iron particles left behind after the brushing process when finishing.

Wash and dry as detailed above. Then wipe over with a soft cloth soaked with a protective oil. If the product is subject to extreme environmental conditions such as marine locations, and industrial pollution these maintenance procedures should be carried out four times a year. For severe corrosion, non-abrasive cream cleaners or proprietary stainless steel cleaners should be used to remove the corrosion.

Specifications

Max. power: 1 x 10W Recommended bulb:

10W LED E27 GLS bulb for maximum brightness.

Lower wattages are also suitable.

Voltage: 240V, 50Hz Bulbs not included IP rating: IP44 Weight: 1kg

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

This symbol 🗵 indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.


John Lewis plc SW1V 2QQ johnlewis.com







STOWE WALL LIGHT **USER GUIDE**

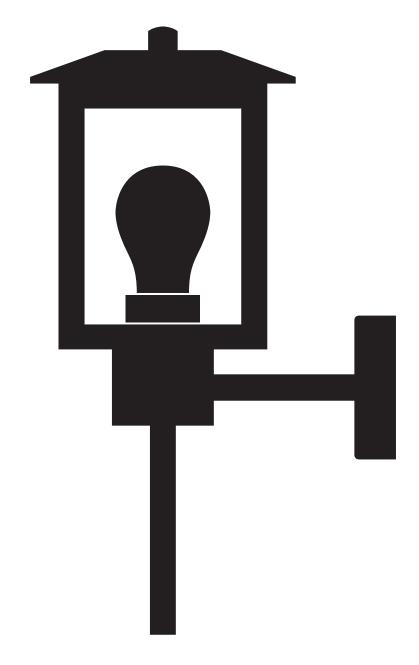



70270313

Thank you for purchasing this Stowe wall light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product has special protection against the ingress of water, and is rated IP44. If the plastic shade is broken or cracked it must be replaced, please consult your retailer.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).


For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling lightbulbs to avoid injury in case of breakage.

Parts list

Light fitting		1	Screws	(famamana)	2	
			Wall plugs		2	

Assembly

Carefully unpack the carton, making sure all the parts are present before assembly.



Step 1

Remove the finials (A) from the front of the product and lift the light fitting body away from the wall back. Keep the finials and rubber washers (B) in a safe place for refitting later. See. Fig. 1.

Step 2


Using the wall back as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (suitable for masonry only - for other surfaces use appropriate fixings). Make sure the wall back is correctly oriented with the drain hole at the base. Take care not to damage any wiring or pipes when drilling the holes.

Step 3

Carefully pierce a small hole in the rubber gasket in the centre of the mounting box to allow the cable to pass through. Feed the incoming mains supply cable through the grommet entry hole.

Step 4

Secure the wall back to the wall using the screws and fixings supplied. Ensure the wall is capable of holding the weight of the product.

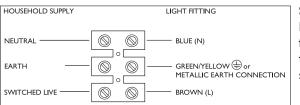


Step 5

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.


Check that....

- Ensure wiring connections are tight.
- Ensure earth wire is correctly fitted to the earth connection.
- Make sure the incoming mains cable is kept away from the heat of the lamp and that the grommet is still in place to maintain the IP rating.



Step 6

Place the light fitting over the threads of the securing screws and refit the finials to secure. Make sure the rubber seal is in place to maintain the IP rating and ensure the fitting is correctly oriented - lampholder must point upwards. See Fig. 2.



Step 7

Fit the recommended bulb as per the details overleaf. To access the bulb, undo the 2 screws under the shade and keep safe for refitting later. Lift off the metal frame - ensure seal is in place around all 4 corners to ensure ingress protection. Screw the bulb into the lampholder. Refit the metal frame with the 2 screws set aside earlier. Screw the stem (E) onto the underside of the shade. See Fig. 3.

Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

Do not use solvents or abrasive cleaners as these could damage the finish. Wash plastic parts with a damp cloth. Do not use abrasive materials as these will damage the finish.

In normal circumstances, stainless steel is very resistant to corrosion. Some maintenance is still required to preserve the high quality appearance:

Wash the product with warm soapy water, removing all surface deposits. Rinse with clean water and dry with a soft cloth. (Continued overleaf)