

For use

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Recommended bulb

3x 6W
SES LED Candle

or

3x 28W
SES Eco Halogen Candle

or


3 x 40W
SES Candle

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

Specification

Maximum wattage: 3 x 40W
Voltage: 240V, 50Hz
IP Rating: 20
Weight: 4.8kg



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

John Lewis

User Manual Victoria Pendant



Thank you for purchasing this Victoria Pendant. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please keep these instructions for future reference.

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.





When changing a bulb always switch off at the mains and allow to cool down. Dispose of used bulbs carefully.

This product is suitable for indoor use only.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling lightbulbs to avoid injury in case of breakage.

Parts List

Light Fitting		1	Screws		2
			Wall Plugs		2
			Spare Drops		2

Installation Instructions

Refer to assembly diagrams opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.**

Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. The ring/loop will remain live unless isolated at the mains or circuit breaker **regardless of the position of the wall switch.**

Step 2: Height Adjustment

See Fig. 1. The drop of this product can be reduced by removing




Fig. 1

chain links. The slack electrical cable can be reduced and secured by pulling the cable through the cord grip (A). Always ensure that the weight of the product is supported by the chain and not the electrical cable.

Step 3

Remove the fixing strap (A) from the fitting by removing side screws (B) and washers (C) (see diagram). Using the screws provided in the fixing pack, secure the strap to the ceiling, making sure that there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.


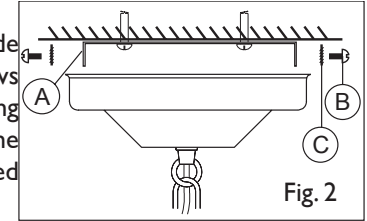


Fig. 2

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

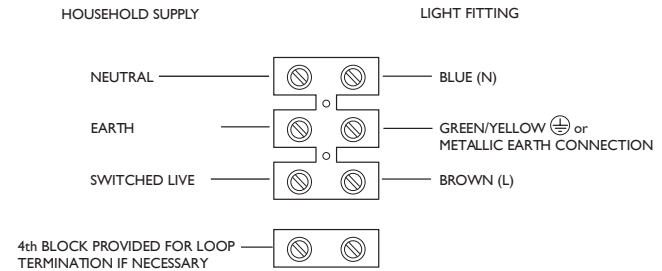

Check that..... You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block

Step 5

Attach the product to the fixing bracket using side screws (B) and washers (C) (see diagram in step 2), by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

Step 6: The glass droplets

Please note that the glass droplets on this product are already fitted in place and do not require self-assembly. 2 spare droplets are supplied should any need replacing. To fit a new droplet, simply feed the wire ring at the top of the droplet through the hole in the end of the scroll.

Step 7

Fit the bulbs as per the details overleaf.

Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.