

Product information

- Indoor/bathroom use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish
- Do not use this product if the shade is cracked or damaged.
Do not use the product without the shade attached

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 2 x 6W
Recommended bulb:
6W E14 Candle LED bulb for maximum brightness.
Lower wattages are also suitable.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 44
Weight: 0.65kg

5-year guarantee


At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.




KARA FLUSH CEILING LIGHT USER GUIDE

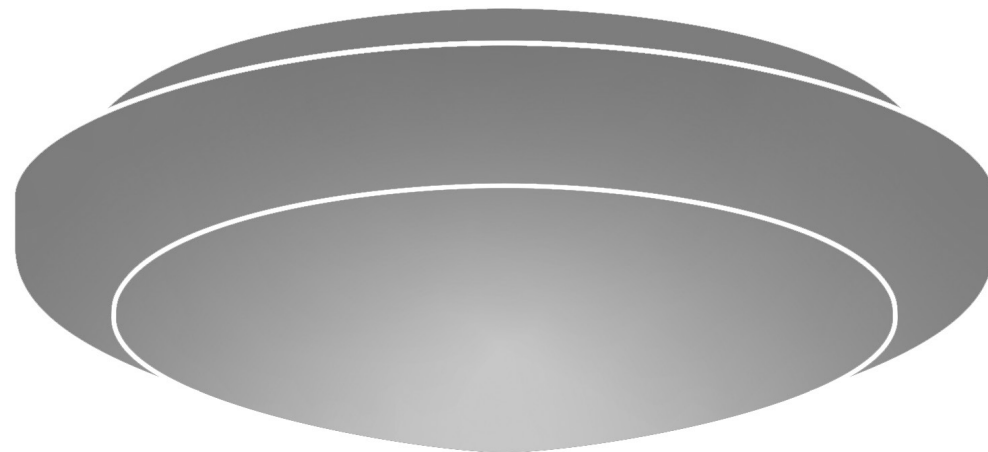

John Lewis plc
SWIV 2QQ
johnlewis.com

Made in China

CE  IP44



22/04/2026

Please retain these instructions for future reference.



Product Code:
10504521

Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 Amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product is rated IP44 and must not be used without the shade attached.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling lightbulbs to avoid injury in case of breakage.

Parts list


Description	Image	Quantity
Light fitting		x 1
Shade		x 1
Wall plugs		x 3
Screws		x 3
Plastic washers		x 3

Assembly

This product has special protection against the ingress of moisture and is IP44 rated.

This product is suitable for use in Zone 2, and outside Zones of a bathroom.

See diagram. **If installing in a bathroom a 30mA RCD must be used - in accordance with IEE Wiring Regulations and the Building Regulations.**

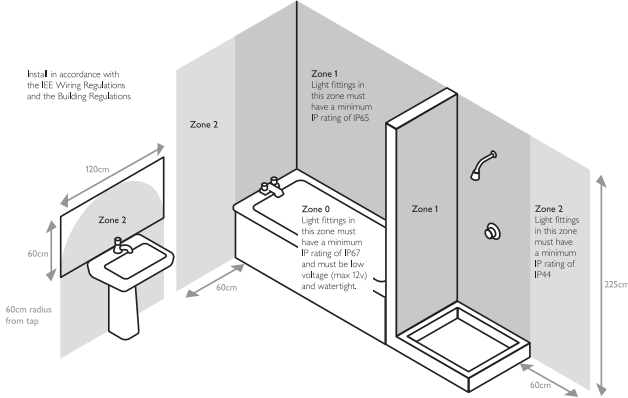

Install in accordance with the IEE Wiring Regulations and the Building Regulations

Zone 0
Light fittings in this zone must have a minimum IP rating of IP67 and must be low voltage (max 12v) and watertight.

Zone 1
Light fittings in this zone must have a minimum IP rating of IP65

Zone 2
Light fittings in this zone must have a minimum IP rating of IP44

Dimensions: 120cm, 60cm, 60cm radius from tap, 60cm, 225cm, 60cm


Product assembly

Step 1

Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Use the ceiling plate as a template to mark and make the screw holes. Carefully pierce the grommet (A) and pull the house wiring through. Attach to the ceiling using the screws provided (B). Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

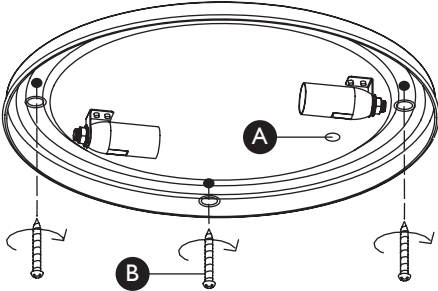


Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Check that:

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

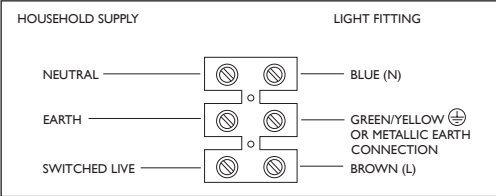

Step 4

Fit the bulbs (C). Do not exceed the rated power or fit a different shaped bulb.

Step 5

Fit the shade (D) by placing over the ceiling plate and twisting clock-wise to lock, ensuring the seals are tight to maintain the ingress protection.

When changing bulbs, allow the shade to cool before twisting anti-clockwise to remove.

Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

