

Recommended bulb (included)

6 x 3.5 Watt energy efficient LED GU10

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Specifications

Max. power: 3.5W

Voltage: 240V, 50Hz


IP rating: IP20

Weight: 1.4kg



Please retain these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Logan 6lt

Spotlight

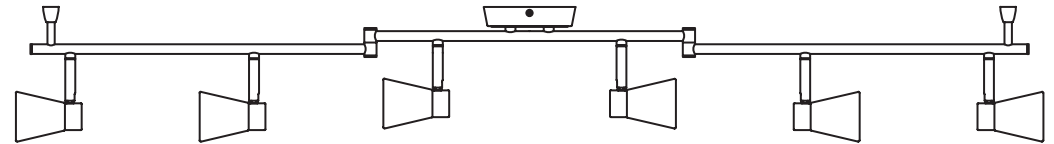

27/02/2019

Thank you for purchasing this Logan spotlight. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class I product and must be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.


This light fitting should be connected to a 5 amp fused circuit.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or adjusting.

This product has been designed with folding bars to allow different configurations and layouts to be easily achieved. To position the bars, fold them out into the desired configuration. There is no need to tighten the bars once in position. They are designed to rotate freely to allow easy operation. When installing and using this product, take care not to allow the bars and heads to collide with each other.



The supplied bulbs are 3.5W LED GU10 and are not dimmable.

Make sure that the minimum distance to the illuminated surface is not less than 0.5m (50 cm).

Parts list	Image	Qty
Light fitting		1
Screws		4
Wall plugs		4
LED Bulbs		6
Bulb tool		1
Arm support fixing & grub screw		2
Hex key		1

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Before removing the existing fitting, carefully note the position of each set of wires.




Fig. 1

Step 2

Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B). See Fig. 1.





Fig. 2

Step 3

Attach to the ceiling using the screws provided. Refer to Fig. 2. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 4

Having identified the household wiring from your existing fitting, connect to the connection block inside the product. When completed, ensure that there are no loose strands of wire exposed.

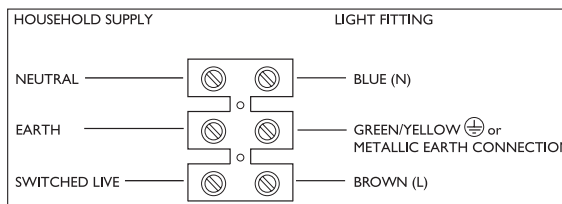

Check that

You have correctly identified the house wires.


The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

Step 5

This product has “L” shaped fixing slots to allow easy fixing to the ceiling strap. Refer back to Fig. 1. Locate the “L” slots (C) around the small screws (B) on the ceiling strap (A). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.



Step 6

Refer to Fig. 3. Move the bars to the desired positions and mark the hole positions of the arm supports (B) on the ceiling. Take care to avoid damaging concealed wiring when drilling holes or fixing screws into the ceiling. Loosen grub screw (A) so that fixing (B) comes away from the bar. Screw fixing (B) to the ceiling in the desired position. Locate pin (C) into fixing (B) and tighten grub screw (A) to secure.

Step 7

Fit the recommended bulbs using the tool provided per the details overleaf. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.