

Recommended bulb (not included)

1 x 9W

ES LED Energy efficient classic GLS

or

1 x 42W

ES Eco Halogen GLS

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Specifications

Max. power: 60W


Voltage: 240V, 50Hz

IP rating: IP20

Weight: 0.36kg



Please retain these instructions for future reference.

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.


We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

John Lewis

User manual Baldwin Pendant light

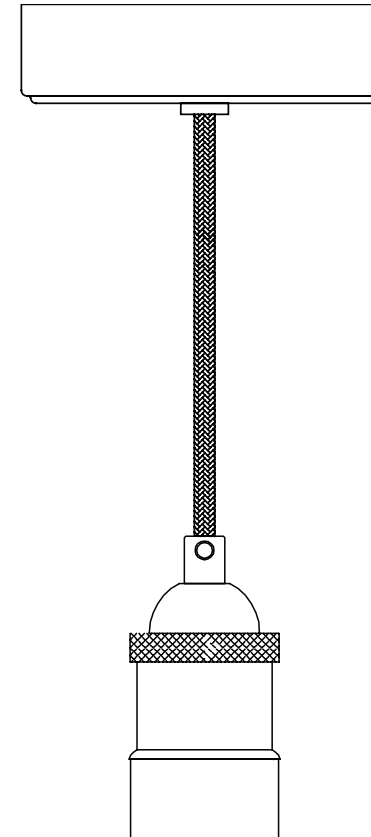

18/02/2021

Thank you for purchasing this Baldwin pendant light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class II product and must NOT be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a 5 amp fused circuit.









This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or adjusting.

This product is dimmable when used with a suitable dimmable bulb.

Parts list

Parts list	Image	Qty
Light Fitting		1
Fixing bracket		1
Screws		3
Wall plugs		3
Hex Screws		2
Hex Key		1
Disk		1
Hook		1

Assembly

Refer to assembly drawings below. Carefully unpack the carton, making sure all the parts are present before assembly.

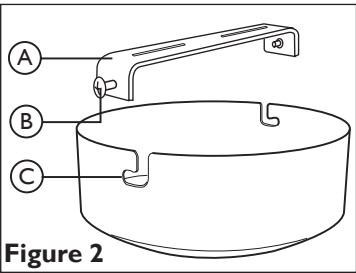



Figure 2

Step 1
Before removing the existing fitting, **carefully note the position of each set of wires.**

Step 2
See Figure 1. The drop of this product can be reduced and secured by unscrewing the clamp screw inside the ceiling cover and feeding the excess cable up into the ceiling cover and retightening the cable clamp once desired drop is reached. This will be easier to complete before attaching the product to the ceiling.

Step 3
Refer to Figure 2. Remove the fixing bracket (A) from the ceiling cover by removing the side screws.

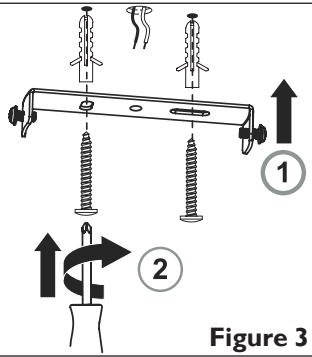


Figure 3

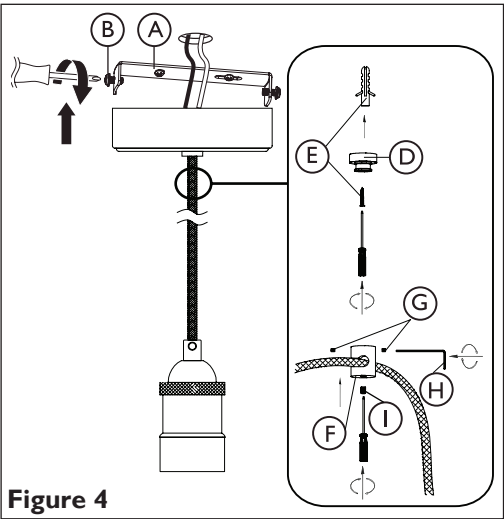
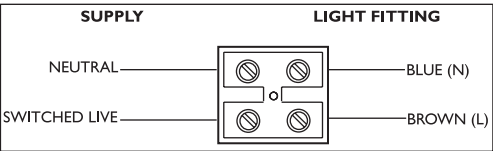


Figure 4

Step 4
Refer to Figure 3. Attach the fixing bracket to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 5
Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.

Care instructions
We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Check that
You have correctly identified the house wires.
The connections are tight.
No loose strands have been left out of the connection block.

Step 6
Refer to Figure 4. Attach the product to the ceiling. This product has “L” shaped fixing slots (C) to allow easy attachment to the fixing bracket, as shown in Figure 2. Locate the “L” slots around the small screws (B) on the fixing bracket (A) Rotate the ceiling cover to attach the product to the bracket. Tighten the screws to secure. Take care not to trap any wiring.

Step 7
Refer to Figure 4. This product is supplied with an optional hook to attach the cable to the ceiling if desired. Attach the disk (D) to the ceiling using the supplied fixings (E). Take care not to damage any concealed wiring or pipes. Place the cable through the hook (F). Then place the hook over the disk (D) and secure in place with the supplied hex screws (G) using the hex key (H). Tighten the cord grip (I) underneath to secure the cable.