Product information	 Indoor use only Dimmable - When used with dimmable bulbs Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish Glass parts - Just use a damp cloth. Do not use abrasive materials as these will damage the finish. Take care when handling glass parts to avoid damage or injury 		
Aftercare and Troubleshooting	You've switched on the light, but it's not working: 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.		
Specification	Max power: 1 x 7W Recommended bulb: 7W LED E27 GLS bulb for maximum brightness. Lower wattages are also suitable. Rated input: 220 –240V, 50Hz Bulbs not included IP rating: 20 Weight: 1.76kg		
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.		
Recycling	This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.		




UK 🕱

15/08/2024

5 YEARS

JOHN LEWIS & partners

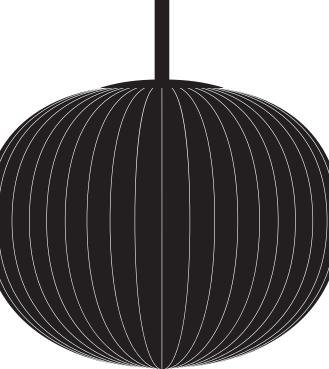

PLEAT GLOBE PENDANT LIGHT

USER GUIDE

Made in China

Please retain these instructions for future reference.

Thank you for purchasing this Pleat Globe pendant light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). For your safety, always switch off the supply before cleaning or removing the shade.

Parts list


Parts list	Image	Qty
Light Fitting		1
Screws	(Buuuuuuv> (Buuuuuuv>	2
Wall Plugs		2
Shade		1

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.


Step 1

Before removing the existing fitting, carefully note the position of each set of wires.



Step 2


See Figure 1. The drop of this product can be reduced and will be easier to complete before attaching the product to the ceiling. Pull the cable through the cord grip (X). until the desired height is achieved.



See Figure 2. Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B) and attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

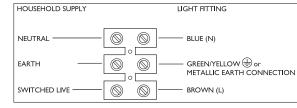

Step 3

Check that

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

Step 5


Figure 3

Step 6

Step 7

See Figure 3. Attach the product to the fixing bracket using side screws by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

515



Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

See Figure 4. Fit the bulb as per the details overleaf.

tightening the rod (F). Do not overtighten.

See Figure 4. Attach the shade to the product by placing the lampholder rim (C) inside the top of the shade (D). Allow the

shade topper (E) to rest on top of the shade and secure in place by

Note:

During transit, the cable can become kinked. It may be necessary to straighten the cable to allow the shade to hang level. Manipulate the kinked cable between thumb and fingers to straighten.

