Product information	 Indoor use only Dimmable - When used with dimmable bulbs Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish 	
Aftercare and Troubleshooting	You've switched on the light, but it's not working: 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order	
	If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.	
Specification	Max power: 3 x 6W Recommended bulb: 6W LED E14 Golf bulb for maximum brightness. Lower wattages are also suitable. Rated input: 220 –240V, 50Hz Bulbs not included IP rating: 20 Weight: 2.6kg	
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.	
Recycling	This symbol A indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.	

John Lewis plc SW1V 2QQ johnlewis.com



01/07/2024



LEAF 3LT SEMI FLUSH

USER GUIDE

JOHN

Made in China

Please retain these instructions for future reference.

Thank you for purchasing this Leaf 3lt semi-flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class II product and must NOT be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.


This light fitting should be connected to a 5 amp fused circuit.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or removing the shades.

Parts list

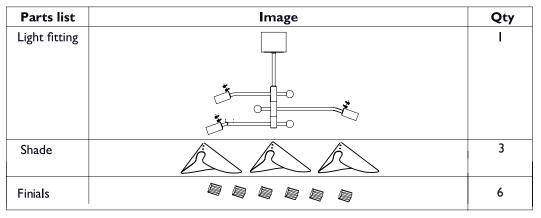


Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.


Step I

Before removing the existing fitting, carefully note the position of each set of wires.



Step 2: <u>Repositioning Arms</u>


See Figure A. To reduce the packaging, the arms on this fitting have been deliberately moved out of position. Before installation, the arms must be correctly re-positioned by hand into equally spaced positions. Each arm has a spring washer fitted to it to enable the arm to be re-positioned without the need for loosening and retightening the nut. Simply rotate each arm into the correct position.



See Figure 1. Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B).

Step 4

Step 3



See Figure 2. Attach the fixing bracket to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 5

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown.

SUPPLY	LIGHT FITTING
NEUTRAL	BLUE (N)

Check that

You have correctly identified the house wires. The connections are tight.

No loose strands have been left out of the connection block.

Step 6

Refer back to Figure I. Attach the product to the fixing bracket (A), by locating the screws (B) in the bracket into the holes in the ceiling cover and tightening the screws to secure. Take care not to trap any wiring.




Figure 4

Step 7

Refer to Figure 3. Place the shades (C) over the lampholders (D) and secure in place with the supplied finials (E).

Step 8

Fit the bulbs as per the details overleaf.

Step 9

Refer to Figure 4. The arms can be repositioned via the levers (F).

Step 10

Replace fuse or circuit breaker and switch on.Your light is now ready for use.