Product information	 Indoor use only Non-dimmable Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish 	JOHN LEWIS & PARTNERS	BALDWIN WALL LIGHT USER GUIDE
Aftercare and Troubleshooting	You've switched on the light, but it's not working: 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order		
	If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.		
Specification	Max power: 6W Recommended bulb: 1 × 6W E14 Golf LED bulb for maximim brightness. Lower wattages are also available. Rated input: 220 –240V, 50Hz Bulbs not included IP rating: 20 Weight: 0.5kg		
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.		
Recycling	This symbol X indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.		

John Lewis Plc 171 Victoria Street London SW1E 5NN johnlewis.com

Made in China




Please retain these instructions for future reference.

22/03/2023



USER GUIDE

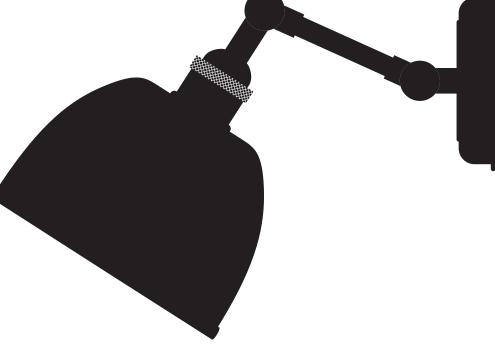

Getting started	Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions	Product a	
	carefully before use.	Step 1 Refer to ass	
Warnings	This is a Class 1 product and must be earthed. It is recommended that this fitting is installed by a qualified electrician.	the carton, before asse carefully no	
	Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.	Step 2 Remove the removing th	
	This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. Dispose of used bulbs carefully. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces	Ensure ther weight of th as a templa Drill holes a damaging ar to the wall	
	(e.g. polystyrene, textiles). For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing shades.	Step 3	

Parts list


Description	Image	Quantity
Light fitting and shade ring (fitted)		x 1
Shade		x 1
Wall plugs		x 2
Screws	(()	x 2

Product assembly


Refer to assembly diagrams right. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Remove the fixing bracket (A) from the product by removing the side screws (B).

Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs. Take care to avoid damaging any concealed wiring and pipes. Fix the bracket to the wall using supplied screws (C).



Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block.



Step 4

Attach the product to the fixing bracket (A), by locating the screws (B) in the bracket into the holes in the sides of the product and tightening the screws to secure. Take care not to trap any wiring.

Step 5

Remove the shade ring (D) from the threaded lampholder (E). Place the shade (F) over the threaded lampholder and secure in place by refitting the shade ring. Do not overtighten.

Step 6

Fit the recommended bulb (G) as per the details overleaf.

Replace fuse or circuit breaker and switch on using the toggle switch (H) Your light is now ready for use.

Step 7

The arm and shade position can be adjusted by loosening the thumb screws (I) on the join of the shade and arm.

NOTE: The shade may get hot. Only adjust after the fitting has been switched off for ten minutes.

