

Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.


Specification

Max power: 15W
Recommended bulb:
1 x 15W E27 GLS LED bulb for maximum brightness.
Lower wattages are also available.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 20
Weight: 2.38kg

5-year guarantee


At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.




BALDWIN XL PENDANT USER GUIDE

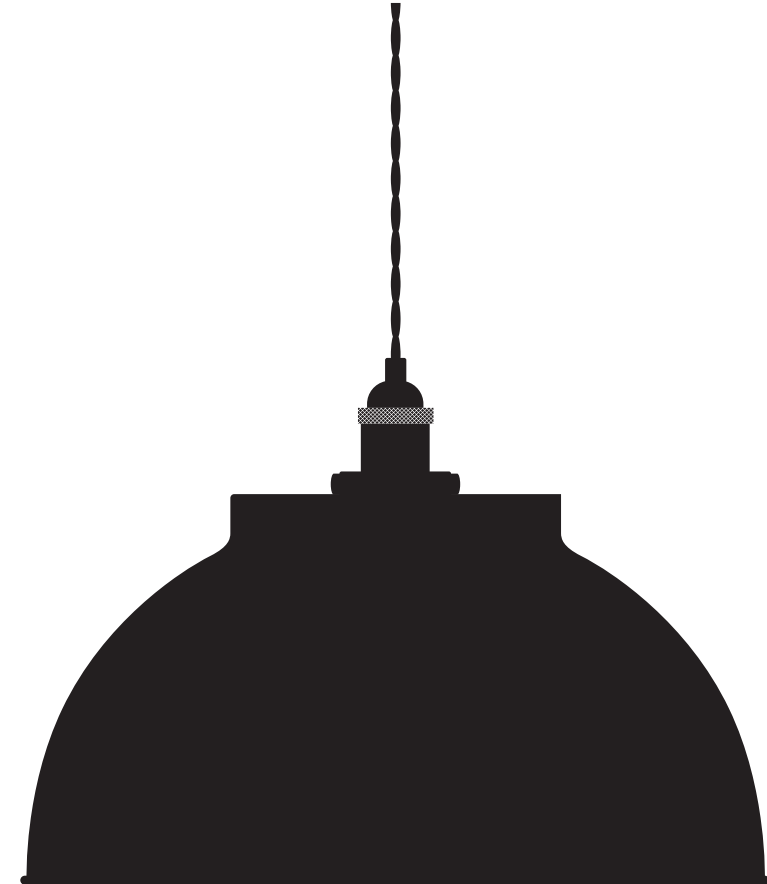






**Thank you for purchasing this Baldwin Pendant.
Please read the instructions carefully before
use to ensure safe and satisfactory operation
of this product.**


Warnings

-  This is a Class 1 product and must be earthed. For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority.
- To prevent electric shock switch off at mains supply before installing or maintaining this fitting.
- Ensure other persons cannot restore the electrical supply without your knowledge. This light fitting should be connected to a 5 amp fused circuit.
- This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
- Ensure the correct fixings are used for the installation surface.
- For your safety, always switch off the supply before cleaning or adjusting.
- This product is dimmable.

Parts list


		Qty
Light fitting (E)		1
Top Cap (F)		1
Shade (6)		1
Wall plugs		2
Screws (B)		2

Product assembly



Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Remove the fixing bracket (A) from the ceiling cover and attach to the ceiling using the wall plugs and screws (B) provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.




Height Adjustment

The length of drop of this product can be altered by pulling the cable through the cord grip (C) and by adjusting the length of the steel cable.

Push the steel cable through the grip (D) until the desired height is achieved. To release the grip and lengthen the cable, push up the button in the grip. Always ensure that the weight of the product is supported by the steel cable and not the electrical flex.

3

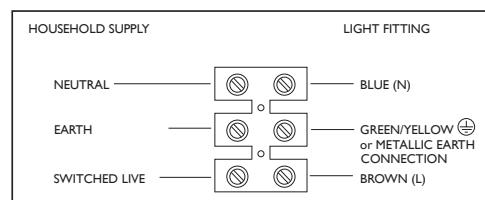


Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way.

Check that:

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

4

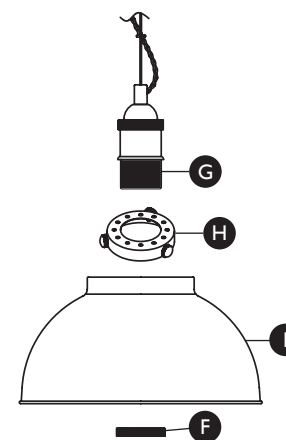

Re-attach the product to the fixing bracket and tighten the side screws (E).

To attach the shade remove the shade ring (F) from the threaded body (G), place the top cap (H) and the shade (I) over the threaded body and secure with the shade ring, tightening with light pressure.

Fit the recommended bulb.
Your light is now ready to use.