Product information	 Indoor use only Dimmable Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish 		
Aftercare and Troubleshooting			
Specification	Max power: 1 x 10W Recommended bulb: 10W LED E27 GLS bulb for maximum brightness. Lower wattages are also suitable. Rated input: 220 –240V, 50Hz Bulb not included IP rating: 20 Weight: 1.15kg		
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.		
Recycling	This symbol A indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.		



Linen 1 Light Pendant User Guide



John Lewis plc SW1V 2QQ johnlewis.com



Please retain these instructions for future reference.

22/07/2024




Product Code: 70142413

Made in China

Getting started	Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.	Product assembly Step 1
		Carefully unpack the carton, making sure all the parts
Warnings	This is a Class 1 product and must be earthed. It is recommended that this fitting is installed by a qualified electrician.	present before assembly. Before removing the existing fit carefully note the position of each set of wires.
	Install in accordance with the IEE Wiring regulations and the Building Regulations.	Step 2
	To prevent electrocution switch off at mains supply before installing or maintaining this	Remove the fixing bracket (A) from the product by
	fitting. Ensure other persons cannot restore the electrical supply without your knowledge.	unscrewing the two side screws (B) and retain for re
	If you are in any doubt, please consult a qualified electrician.	Ensure there is a solid mounting surface to support
	This light fitting should be connected to a 5 amp fused circuit.	the weight of the light fitting. Using the fixing bracket
	If replacing an existing fitting, make a note of the connections.	as a template, mark the position of the mounting hole
	Always use the correct type and wattage bulb. Never exceed the wattage stated.	Drill holes and fit supplied wall plugs (C) (suitable for
	Dispose of used bulbs carefully.	masonry only). Take care to avoid damaging any conc
	This product is suitable for indoor use only.	wiring and pipes.
	This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces	Fix the bracket to the ceiling using supplied screws (D).
	(e.g. polystyrene, textiles).	Step 3
	For your safety, always switch off the supply and allow to cool down before changing lightbulbs, cleaning or removing shades.	The hanging height of this product can be adjusted. Work out the required height and feed the cable throug

Parts list

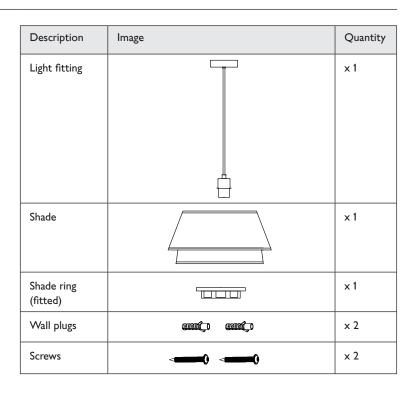

ts are fitting,


V reuse. ket oles. for ncealed

Work out the required height and feed the cable through the cord grip (E) until the desired height is achieved.

Please note: Do not loosen the screw clamp inside the ceiling cup, as this is securing the cable into the terminal block.

Step 4

Connect the product to the household wiring. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block. When completed, ensure that there are no bare or loose strands of wire exposed.



Step 5

Re-attach the product to the fixing bracket and tighten the side screws. This product has "L" shaped fixing holes to allow easy fixing to the fixing bracket. Locate the "L" slots around the side screws (B) on fixing bracket (A). Rotate the ceiling cover to attach the product to the bracket. Tighten the screws to secure. Take care not to trap any wiring.

To fit the shade (F), first remove the shade ring (G) from the threaded lampholder. Place the shade over the lampholder and refit the shade ring. Secure in place.

Fit the recommended bulb (H).

Turn on the power and test.

