

# PERFECT FIT PLEATED BLIND

INSTRUCTION MANUAL

JOHN LEWIS  
& PARTNERS

---

## INTRODUCTION

**Thank you for purchasing this Pleated blind.  
Please read the instructions carefully before use  
to ensure safe and satisfactory operation of this  
product.**

It is recommended that this blind should only be installed by persons competent in DIY. At John Lewis, we are committed to making great products possible. From our in-house Design Team, to our Buyers, we work together to bring great design to life. Our Product Technologists work collaboratively with our Buyers and suppliers to ensure the legality, safety and quality of the product we sell. We are all committed to designing and developing products to the highest industry standards.

We hope you are happy with your product and welcome any feedback or comments you may have.

---



## VIDEO INSTRUCTIONS

Scan the QR code to link to our online videos that guide you in getting a perfect fit for a pleated blind. Alternatively, follow the link [www.johnlewis.com/blindassembly](http://www.johnlewis.com/blindassembly)



---

## TOOLS REQUIRED



---

## PEOPLE TO ASSEMBLE

One person

---

## TIME TO ASSEMBLE

1 Hour

---

## SAFE BY DESIGN


Safe by design means the hazards have been identified early in the design process to eliminate or minimise the risk of harm throughout the life of the product.



---

## PARTS LIST



---

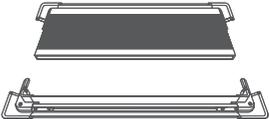Code	Item	Quantity	Illustration
1	Brackets	x4 10cm-99cm x6 100cm-200cm	
2	Side frame	x2	
3	Top frame with fabric	x1	

**1.**  
**Building the**  
**frame.**

Align the frame components.  
Insert the longer parts of the frame into the corner caps and push fully in.  
Repeat on the opposite side.

**2** **3**

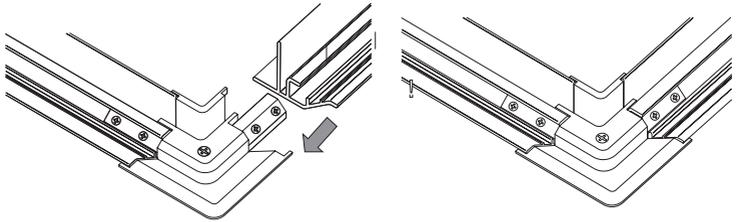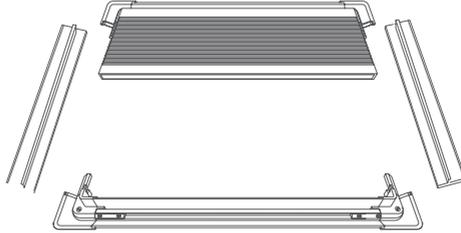


---

**2.**  
**Adjusting the**  
**tension**


Push the blind all the way to the top to help adjust the desired tension.  
The two ends of the tensioning cords are secured to the spring.

**2** **3**

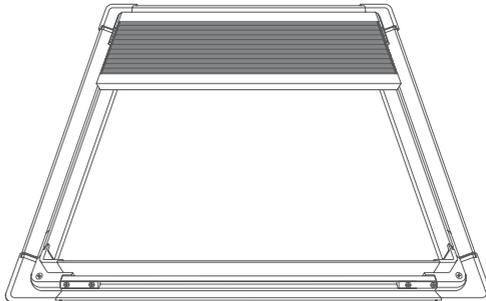

---

Loosen the screw then pull through the cord to adjust the tension. Pull the excess cord through by 5-10mm further to increase the tension or the opposite direction to loosen. Tension can be adjusted by hand with no screwdriver required.

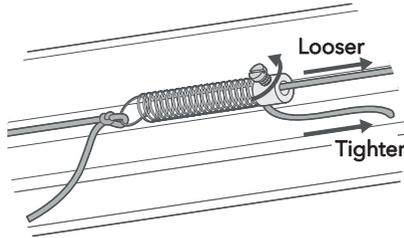



---

### 3. Installing the frame



Place a bank card vertically in the corner of window to measure 85mm. Mark measurement in line with the top of the card and push the brackets behind the window seal. Repeat in each corner.

To mount the frame carefully slot the blind onto the brackets and press firmly until you hear a clicking sound.

1

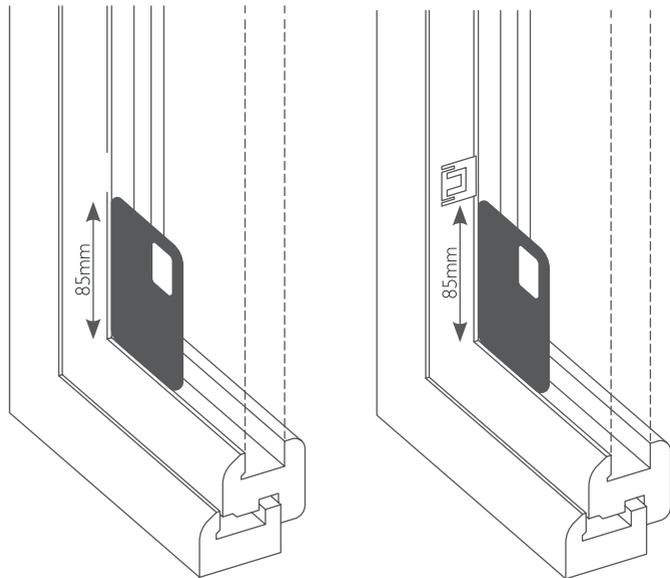


**Top Tip!** Use washing up liquid for easier insertion of the brackets.

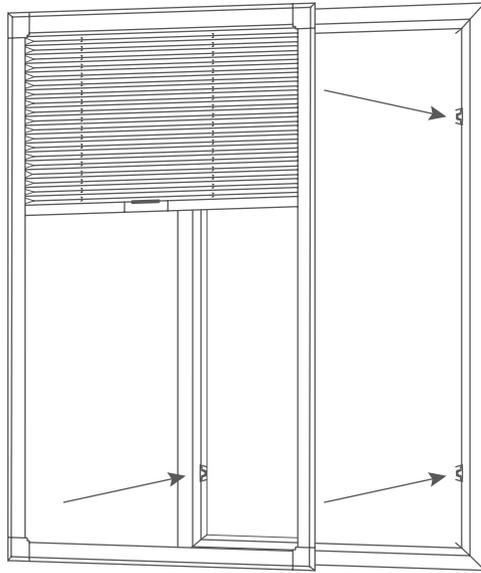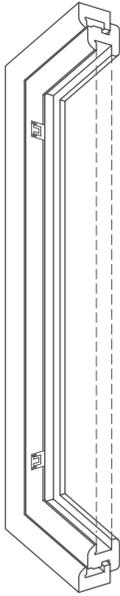

---

#### 4. Operation.

To operate the blind us a handle on the bottom bar to lower or raise the blind.

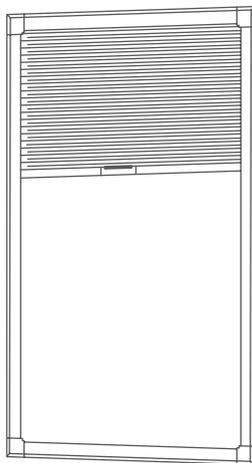

---

## PRODUCT INFORMATION

---

### CARING FOR YOUR PRODUCT

The fabric and frame may be dusted using a damp cloth. The product is maintenance free however we recommend regular checks are completed to ensure no components have been damaged, which could result in operating difficulties or case a safety risk.

Pleated blinds rely on fabric memory and tension to keep the pleats crisp. That is why opening and closing your blinds regularly is important.







Please retain these instructions for future reference.

---

John Lewis Plc  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in Poland  
Batch code:

---