



CORDLOCK PLEATED BLIND

INSTRUCTION MANUAL

JOHN LEWIS
& PARTNERS

INTRODUCTION

**Thank you for purchasing this Pleated blind.
Please read the instructions carefully before use
to ensure safe and satisfactory operation of this
product.**

It is recommended that this blind should only be installed by persons competent in DIY. At John Lewis, we are committed to making great products possible. From our in-house Design Team, to our Buyers, we work together to bring great design to life. Our Product Technologists work collaboratively with our Buyers and suppliers to ensure the legality, safety and quality of the product we sell. We are all committed to designing and developing products to the highest industry standards.


We hope you are happy with your product and welcome any feedback or comments you may have.

VIDEO INSTRUCTIONS

Scan the QR code to link to our online videos that guide you in getting a perfect fit for a pleated blind. Alternatively, follow the link www.johnlewis.com/blindassembly



TOOLS REQUIRED

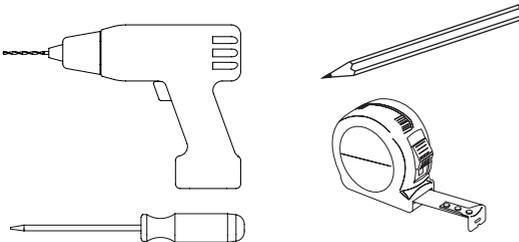


PEOPLE TO ASSEMBLE

One person

TIME TO ASSEMBLE

1 Hour

WARNINGS

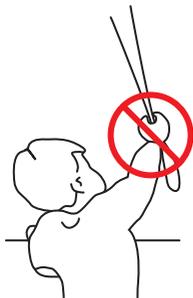

- ⚠ Small parts – choking hazard.
- ⚠ Keep small parts out of reach of children
- ⚠ Ensure the product is fully assembled as illustrated before use.
- ⚠ Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.
- ⚠ To avoid strangulation and entanglement, keep cords out of reach of children.
- ⚠ Cords may become wrapped around a child's neck.
- ⚠ Move beds, cots and furniture away from window covering cords.
- ⚠ Do not tie cords together. Make sure cords do not twist and create a loop.
- ⚠ The safety clips should be positioned high enough to be out of reach of small children yet accessible to adults.
- ⚠ All safety clips for blinds need to be fixed to a solid surface using a screw and fixing suitable for the wall or surface material – see guide to wall mounting and fixings on the last page. These items should not be glued or stuck in place.
- ⚠ The head rail should not be installed less than 1.5m from the floor.


DO'S

- ✓ Please read all safety warnings and installation information fully before installation.
- ✓ This product should be fitted in accordance with the manufacturer's fitting instructions.
- ✓ Check the pack to make sure you have all the parts listed.
- ✓ Take care when drilling on glazed tile surfaces in case the drill slips.
- ✓ Check that all screw and bolt assembly fittings are tightened and inspect on a regular basis.
- ✓ Use the safety device provided.
- ✓ Please read our guide on wall mounting and fixing on the inside back cover.

DONT'S


- ✗ Do not over tighten screws or bolts.
- ✗ Do not use power tools to construct as over tightening and failure may occur.

PARTS LIST


Code	Item	Quantity	Illustration
1	Headrail Bracket	x2 20cm-99cm x3 100cm-174cm x4 175cm-240cm x5 241cm-300cm	
2	Cord cleat safety device	x1	

1. Drilling holes for brackets


Use the brackets as templates and mark the hole positions with a pencil.
Pre-drill the holes. (For more information on wall types and fixings, see page 08).
Measure out 5cm from both ends to fix the brackets. If you have more than 2 brackets spread them evenly.

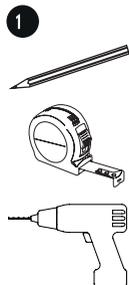


 For safety reasons, make sure the headrail is installed **at least** 150cm from the floor.

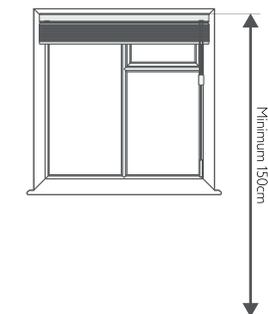

Face fitting

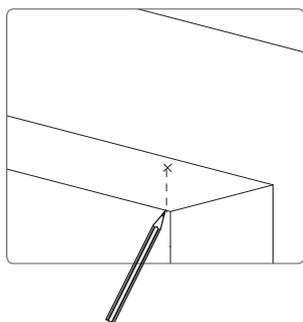


Top recess

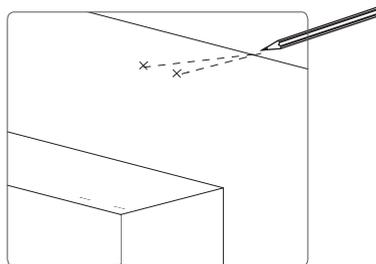


2. Installing the brackets.


Position brackets over the pre drilled holes.
Use a drill or a screwdriver to fix the brackets onto the wall.



Face fitting

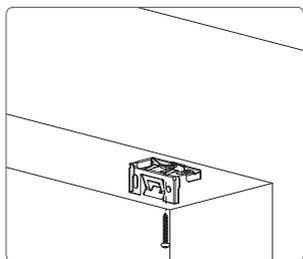

Top recess



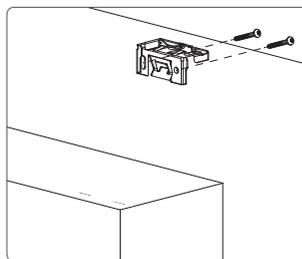


Please note: Fixings are not included.

3.


Blind installation

To install the blind hook the headrail onto the bracket inbetween the lips. Insert a screwdriver behind the headrail and push the headrail up until you hear a 'Click' noise. The headrail is now secured.

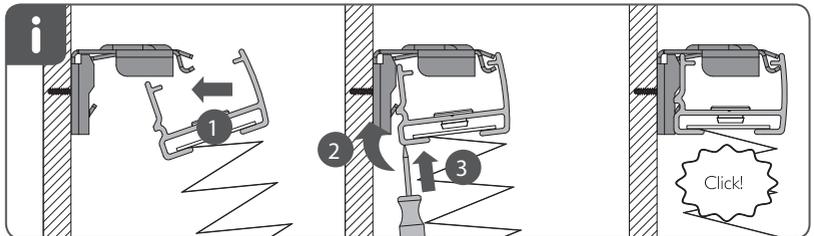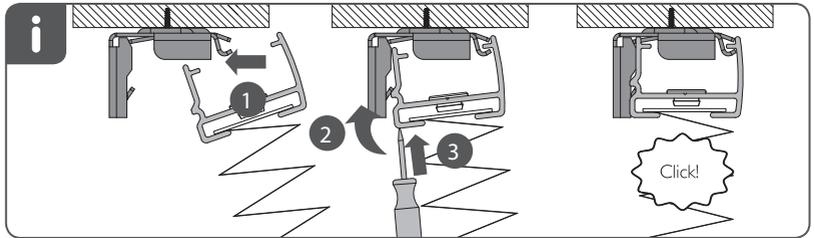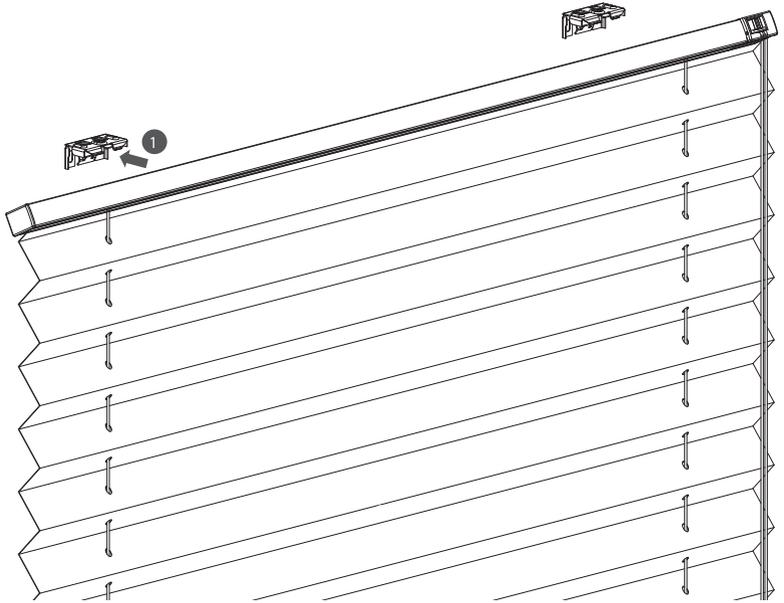


4. Installing child safety device

2




 Safety devices are designed to reduce the risk of accidental strangulation, however this form of risk will not be fully eliminated. Please ensure child safety device is installed correctly and always keep cords, chains and small components out of the reach of children. Children can strangle if a safety device is not installed. Always use a safety device to keep cords and chains out of reach of children.

Ensure the cord cleat is installed at least 1500mm from the floor, as close to the headrail as possible. Mark with a pencil.



Drill screws in to fix the cleat to the wall.




Please note: Screws are not included.

In a figure of eight pattern, wrap the cords around the cord cleats. When the cords are fully accumulated, secure them as such, that no surplus cord is released when any cord is tugged.



A breakaway cord consolidator is pre-fitted to the lift cords so that when a horizontal force is applied to the cords entering the consolidator, it safely breaks away eliminating any hazardous loops.

The cord consolidator is positioned to stop 5cm from the headrail when in the fully deployed position. This is in accordance with EN13120 child safety requirements.

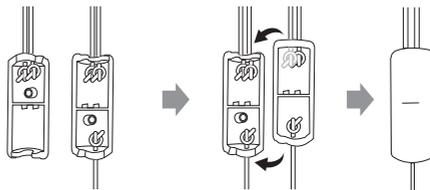

If the cord consolidator is pulled apart: Untangle and untwist cords.

For **2** cords: Press the cord consolidator together until it is fully closed.

For **3** cords: Place the loose cord in the opening in one half of the cord consolidator and press the cord consolidator together until it is fully closed.

For **4** cords: Place one of the loose cords in the opening in one half of the cord consolidator, the remaining loose cord in the opening in the other half and press the cord consolidator together until it is fully closed.




5.

Operating the blind

To raise the blind pull the pull cord down to unlock the cordlock.

To lock the blind in your desired position pull the pull cord to the left to lock the cordlock.


To lower your blind, pull the pull cord to your left to release the cordlock and gently lower your blind to your desired position. Bring the pull cord back to its original position to lock the cordlock.

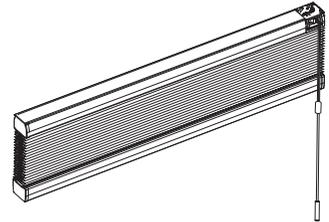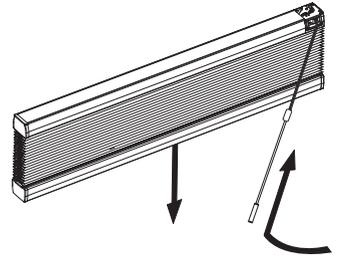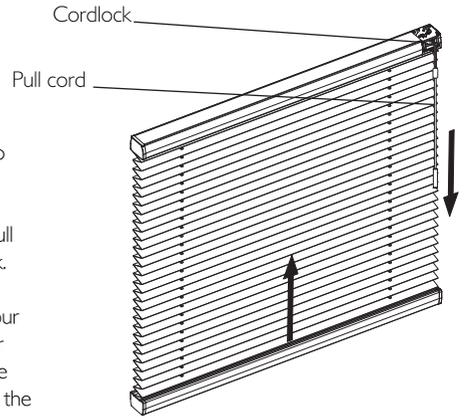

5. Operating the blind

To lower the bottom half of the blind pull the left* pull cord to your right and gently lower your blind to your desired position. To lock the blind in place bring the pull cord back to its original position to lock the cord lock.

To lower the top half of the blind pull the right* pull cord to your left and gently lower the blind to your desired position. To lock it in place, bring the pull cord back to its original position.

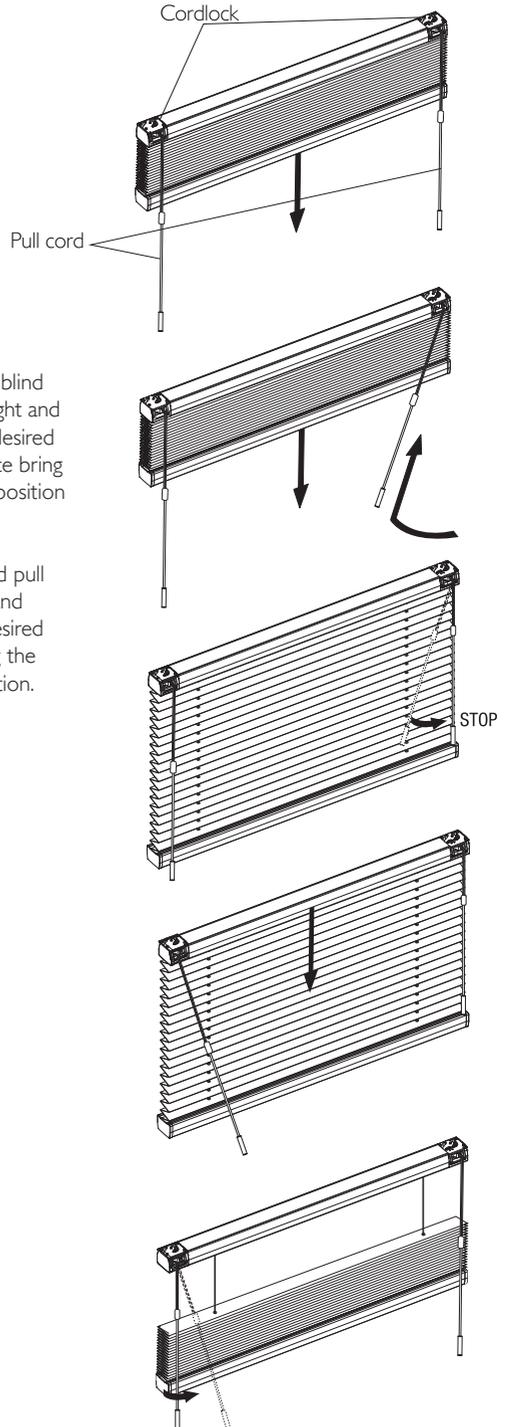

GUIDE TO WALL MOUNTING & FIXINGS

KEY INFORMATION ⚠ **Warning:** We do not provide you with any fixings. Please ensure you use the correct screws/fixings for your type of walls and seek professional advice if you are not sure.


Failure of the product due to incorrect fixings is the responsibility of the installer.

Important - When drilling into the walls always check that there are no hidden wires, pipes etc.

Take care when drilling on glazed tile surfaces in case the drill slips.


FIXINGS

You can use one of the following types of wall plug if your walls are made of brick, breezeblock, concrete, stone or wood.




General Purpose wall plug

Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general – purpose wall plugs can be used.




Plasterboard wall plug

For use when attaching light loads on to plasterboard partitions.




Cavity Fixing wall plug

For use with plasterboard partitions or hollow wooden doors.




Cavity Fixing – Heavy Duty wall plug

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.



Hammer Fixing wall plug

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.



Shield Anchor wall plug – Heavy loads

For use with heavier loads such as TV and Hi-Fi speakers and satellite dishes etc.

PRODUCT INFORMATION

CARING FOR YOUR PRODUCT

The fabric may be dusted using a damp cloth. The product is maintenance free however we recommend regular check are completed to ensure no components have been damaged, which could result in operating difficulties or case a safety risk.

Pleated blinds rely on fabric memory and tension to keep the pleats crisp. That is why opening and closing your blinds regularly is important.

Please retain these instructions for future reference.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in Poland
Batch code:
