Product information	 Indoor use only Dimmable - When used with dimmable bulbs Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish 		
Aftercare and Troubleshooting	You've switched on the light, but it's not working: 1. Check your power supply is switched on 2. Turn off the light and check that the bulb is inserted correctly 3. Check the bulb is still in working order If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.		
Specification	Max power: 6W Recommended bulb: 1 × 6W LED E14 Candle bulb for maximum brightness. Lower wattages are also suitable. Rated input: 220 –240V, 50Hz Bulbs not included IP rating: 20 Weight: 0.35kg		
5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.		
Recycling	This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.		

John Lewis plc SW1V 2QQ johnlewis.com



Please retain these instructions for future reference.


16/10/2024



JOHN LEWIS & partners

CARLITA WALL LIGHT USER GUIDE



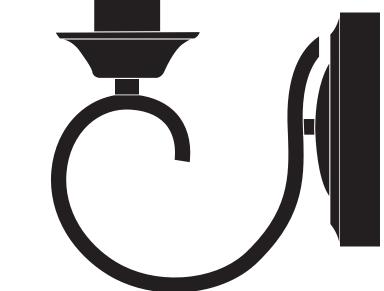

Made in China

Getting started	Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.
Warnings	This is a Class 1 product and must be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.
	This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. Dispose of used bulbs carefully. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
	For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing shades.

Parts list

Description	Image	Quantity
Light fitting		x 1
Shade		x 1
Lampholder cup		x 1
Wall plugs		x 2
Screws	(funnume> (funnume>	x 2

duct assembly

1

er to assembly diagrams right. Carefully unpack carton, making sure all the parts are present ore assembly. Before removing the existing fitting, fully note the position of each set of wires.

2

nove the fixing bracket (A) from the product by crewing the two side screws (B) and retain for reuse.

ure there is a solid mounting surface to support the ght of the light fitting. Using the fixing bracket as a plate, mark the position of the mounting holes. Drill holes fit supplied wall plugs (C) (suitable for masonry only). care to avoid damaging any concealed wiring and pipes. the bracket to the wall using supplied screws (D).

3

Having identified the household wiring from your existing light fitting, connect to the connection block (E) inside the product in the following way. Check that: You have correctly identified the house wires. The connections are tight.

No loose strands have been left out of the connection block.

Step 4

Making sure the product is facing upwards, re attach to the fixing bracket using the two screws removed in step 2 and tighten to secure. Take care not to trap any wiring.

Step 5

Place the lampholder cup (F) onto the lampholder.

Step 6

Fit the recommended bulb (G) as per the details overleaf.

Step 7

To attach the shade, gently push the shade clips (H) inside the shade onto the bulb.

Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

