



Product information	<ul style="list-style-type: none"> <li>Indoor use only</li> <li>3 step dimmable - dimmer is included</li> <li>Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish</li> </ul>
---------------------	--

Aftercare and Troubleshooting	If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.
-------------------------------	---

Specification	Max power: 20W Rated input: 220 –240V, 50Hz IP rating: 20 Weight: 1.5kg Lumen output: 1400 Colour temperature: Warm white (3000K) This product contains a light source of energy efficiency class E For further information please visit: <a href="http://www.lighting-info.co.uk/108968">www.lighting-info.co.uk/108968</a>
---------------	---




Replaceable light source by a professional



Replaceable control gear by a professional

5-year guarantee	At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.
------------------	---

Recycling	This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit <a href="http://www.recycle-more.co.uk">www.recycle-more.co.uk</a> .
-----------	---

John Lewis plc  
SW1V 2QQ  
johnlewis.com  
  
Made in China




30/04/2024

Please retain these instructions for future reference.



# PIVOT BAR 4 LIGHT CEILING PENDANT USER GUIDE

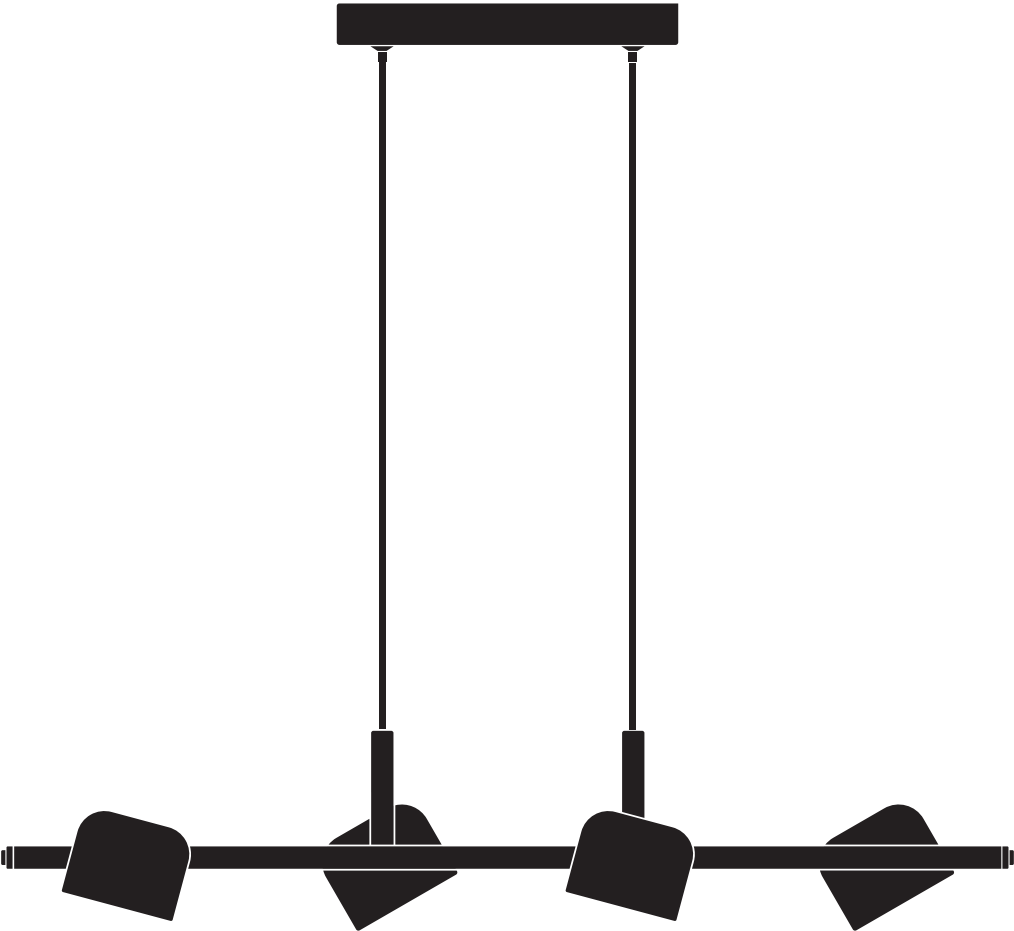

Product Code:  
70159501




**Getting started**

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

**Warnings**

This is a Class II product and must NOT be earthed.  
It is recommended that this fitting is installed by a qualified electrician.  
Install in accordance with the IEE Wiring regulations and the Building Regulations.  
To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.  
If you are in any doubt, please consult a qualified electrician.  
This light fitting should be connected to a 5 amp fused circuit.  
If replacing an existing fitting, make a note of the connections.  
Dimmer is included. Do not use with a dimmable switch.  
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).  
When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

**Parts list**

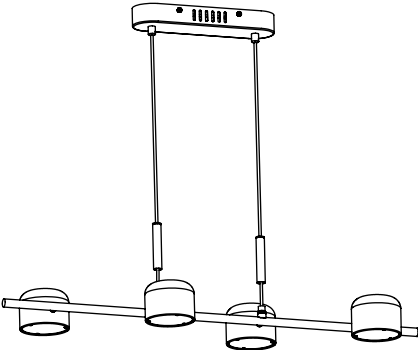Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 4
Screws		x 4

**Product assembly**

**Step 1**

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

**Step 2**

Attach the metal tubes by screwing in a clockwise direction into the threaded part of the body (A). Tighten to secure.

**Step 3**

Remove the fixing bracket (B) from the product by unscrewing the four side screws (C) and retain for reuse. Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (D) (suitable for masonry only). Take care to avoid damaging any concealed wiring and pipes. Fix the bracket to the ceiling using supplied screws (E).

**Step 4**

The hanging height of this product can be adjusted. Work out the required height and feed the cables through the cord grips (F) until the desired height is achieved. It maybe necessary to cut, shorten and reconnect the cables. If you are unsure how to do this, contact a qualified electrician.

**Step 5**

Having identified the household wiring from your existing light fitting, connect to the connection block (G) inside the product in the following way. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block.

**Step 6**

Re-attach the product to the fixing bracket using the side screws removed in step 2 and tighten to secure. Take care not to trap any wiring.

**Step 7**

Your light is now ready for use. Switch on by touching the touch switch on one end of the bar (H). This product also incorporates a dimmer. Hold hand on the dimmer switch to decrease or increase brightness. Alternatively touch once to decrease brightness in stages.

**Note:** The heads rotate from side to side and can be adjusted to the appropriate angle as needed.

