



Assembly Instructions



(W x D x H) 1.8m x 0.9m x 2.4m
Product Name: Daria Arch

Pressure Treated products should not be treated with any other products for the first month.

PLEASE KEEP THESE INSTRUCTIONS

Zest4Leisure
01352 752555 option 1 – sales@zest4leisure.co.uk


Daria Arch Assembly Instructions

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive & Philips Bits / Screwdriver, Tape Measure, 3mm & 6mm Drill Bits required in order for you to drill all screw holes before construction.

Daria Arch Pack List		
Item	Description	Quantity
A	Arch	2
B	Rafter	6
C	Post	4
D	Trellis Panel	2

Fixings		
	90mm Screws	12
	60mm Screws	8
	30mm Screws	16
	'L' Bracket	8

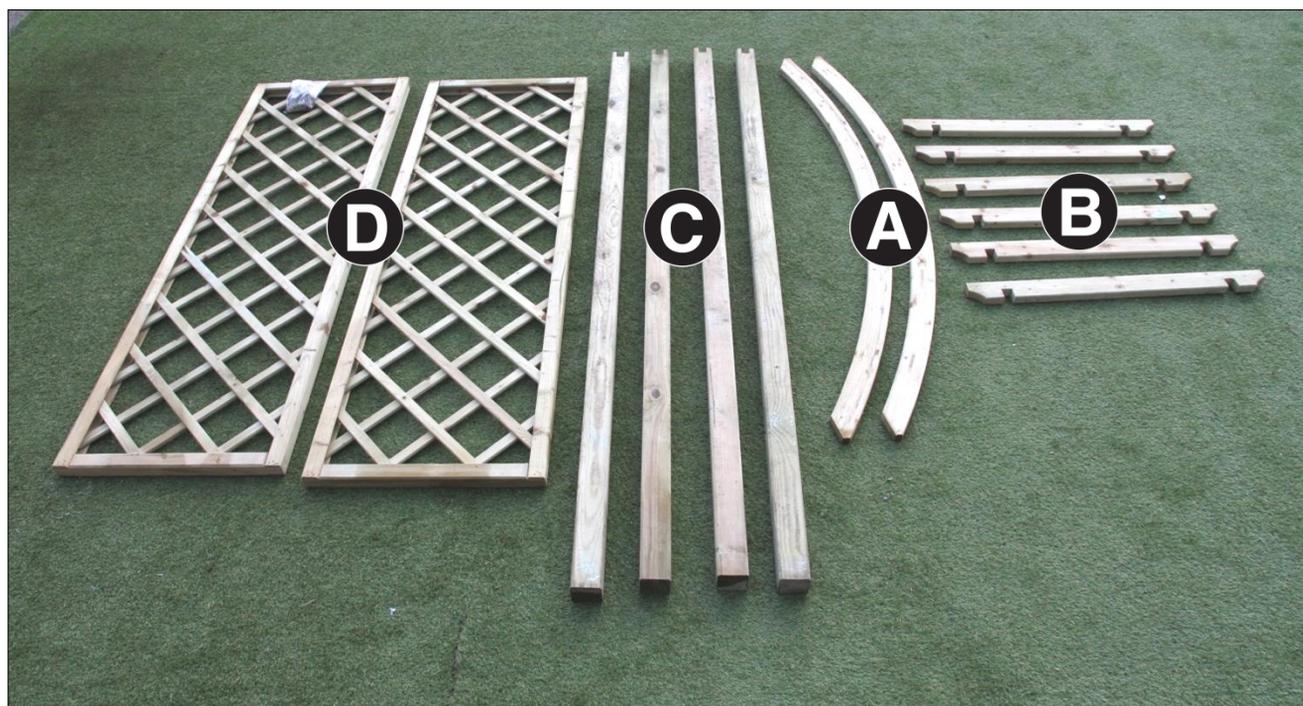

Please take a few moments to check all pack contents listed.

Assembly requires 2 persons.

**Tools required: Corded/Cordless Drill, Pozi-drive & Phillips Bits/Screwdriver,,
Tape Measure, 3mm & 6mm Drill Bits**

1. Position Rafters B at both ends of Arches A and fix using 4no 90mm Screws - 2 per Rafter (Fig.1a). Space out remaining Rafters B equally (Fig.1b) and attach using 8no 90mm Screws.
2. Using length of Trellis Panel D as a guide attach 4no 'L' Brackets centrally to Posts C - 2 per post – ensuring correct orientation of posts & brackets (Figs.2a & 2b) (Posts to be predrilled using 6mm drill bit).

N.B. If using power tools to fit 'L' Brackets, particular care should be taken to prevent injury. Keep hands clear of spinning bracket.

3. Place Trellis Panel D between Posts C and fix in position using 8no 30mm screws – 2no per bracket (Figs.3a & 3b).


Repeat stages 2 & 3 for remaining Posts and Trellis Panel.

4. Locate post assembly onto Arch A (adjust width to suit) and fix in position using 4no 60mm Screws – 2no per Post (Figs.4a & 4b)


Repeat procedure for remaining post assembly.

Daria Arch is now complete.

1a

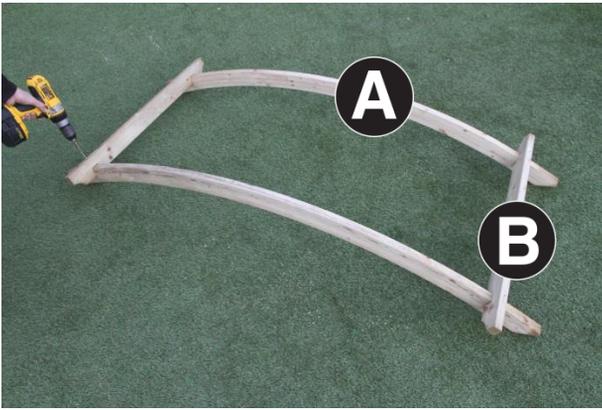

1b

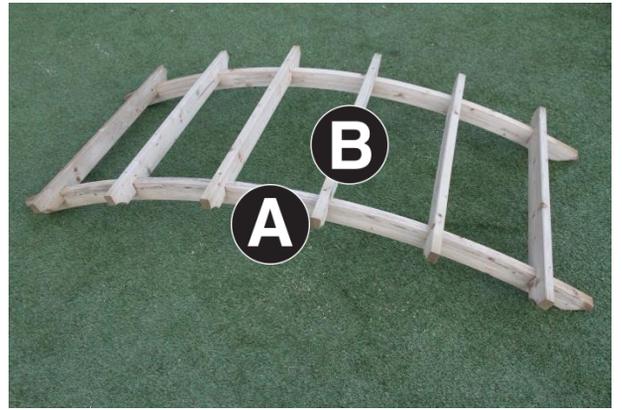

2a



2b




3a



3b



4a

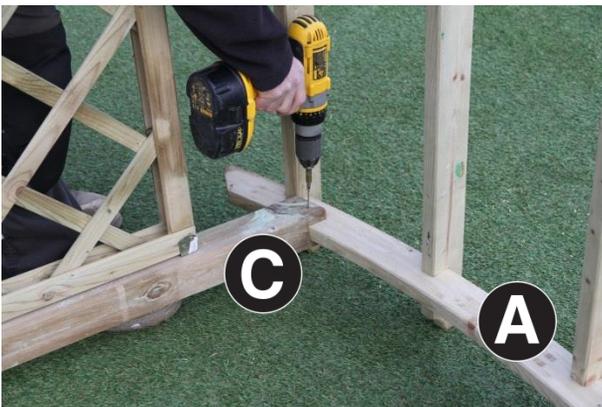

4b

