

Product information

- Indoor use only
- Dimmable (dimmer not included)
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting


If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.

Specification

Max power: 8.4W
Rated input: 220 –240V, 50Hz
IP rating: 20
Weight: 0.3kg
Lumen output: 10522127: 429 10522126: 467
Colour temperature: Warm white (3000K)
This product contains a light source of energy efficiency class F
For further information please visit: www.lighting-info.co.uk/117719



Non-replaceable light source



Replaceable control gear by a professional

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China




18/12/2025

Please retain these instructions for future reference.



WILSON SINGLE SPOTLIGHT USER GUIDE

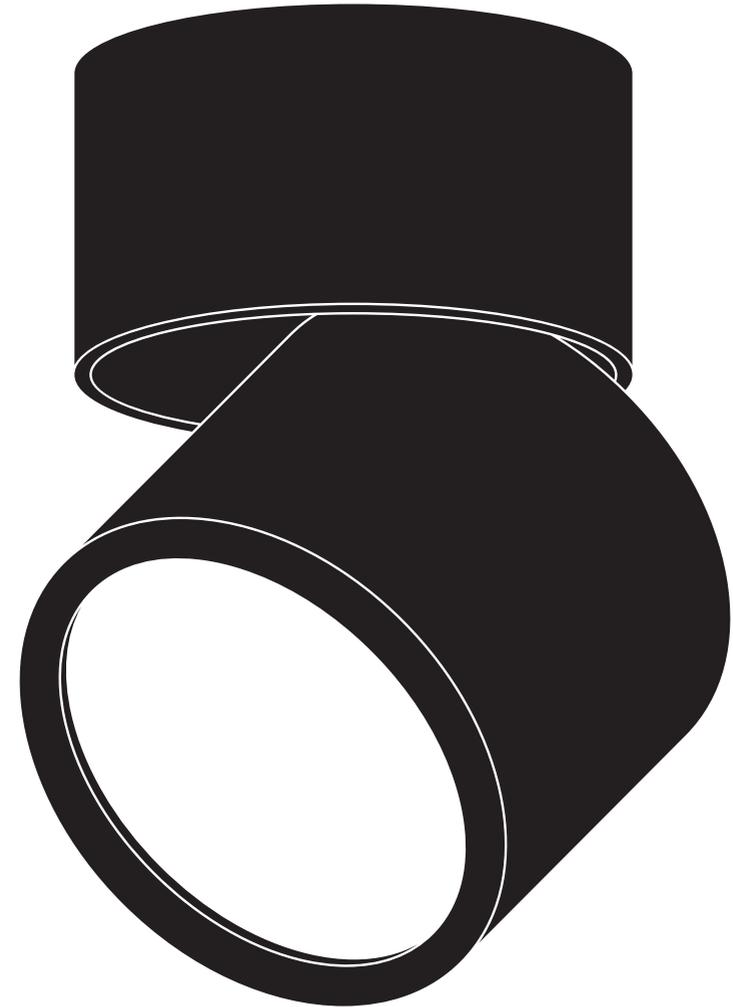

Product Code:
10522126
10522127



Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class II product and must NOT be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 Amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). When moving or cleaning, always switch off at the mains and allow the module to cool before handling. The light source in this product is non-replaceable and when the light source reaches its end of life or if damage occurs, the product should be disposed of responsibly.

Parts list

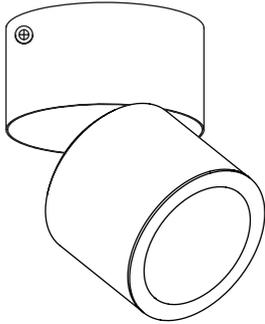Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 2
Screws		x 2

Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Please note

This product has a rotation angle of 320° around a diagonal axis. See Fig. 1. This means that the usable horizontal angle is limited. Please refer to the product label and carefully select the desired position for this product before installing to ensure proper illumination. See Fig. 2.




Step 2

Remove the fixing bracket (A) from the product by unscrewing the two side screws (B) and retain for reuse.

Ensure there is a solid mounting surface to support the weight of the light fitting. Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs (C) (suitable for masonry only).

Take care to avoid damaging any concealed wiring and pipes.

Fix the bracket to the ceiling using supplied screws (D).

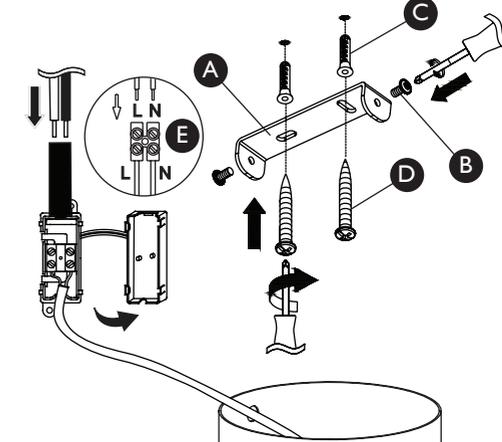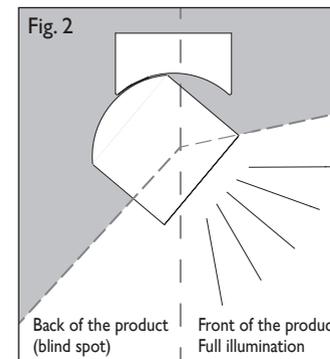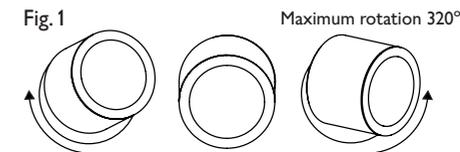


Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way (E). Check that: You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

The lid is closed securely over the terminal block.

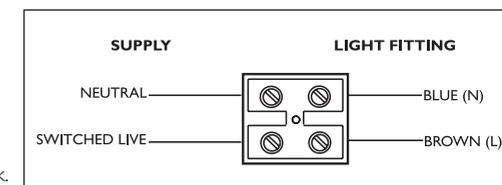

Step 4

Re attach the product to the fixing bracket using the screws removed in step 2 and tighten to secure. Take care not to trap any wiring. Your light is now ready for use.

Using a dimmer switch

If the product is flickering at lower brightness try adjusting the minimum level settings on your dimmer.