

Recommended bulb (included)

6 x 2-6 Watt energy efficient LED GU10

or

6 x 50 Watt GU10 halogen

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

Some Energy saving bulbs are not suitable for use with a dimmer switch.

Specifications

Max. power: 50W

Voltage: 240V, 50Hz


IP rating: IP20

Weight: 1.48kg



Please keep these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Thea

6lt spot light

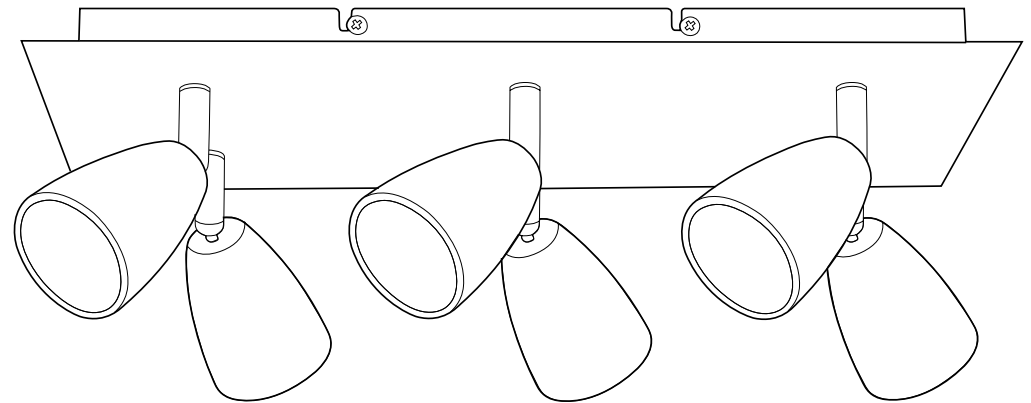

07/06/2019

Thank you for purchasing this Thea spot light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class I product and must be earthed.

For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority


To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a 5 amp fused circuit.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning or adjusting.



The supplied bulbs are 2.5W LED GU10 and are not dimmable.
Halogen bulbs up to 50W can be used - but ensure that the minimum distance to the illuminated surface is not less than 0.5m (50 cm).


Parts list	Image	Qty
Light fitting		1
Screws		4
Wall plugs		4
Bulb tool		1
Bulbs		6

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.


Step 1

Before removing the existing fitting, **carefully note the position of each set of wires.**

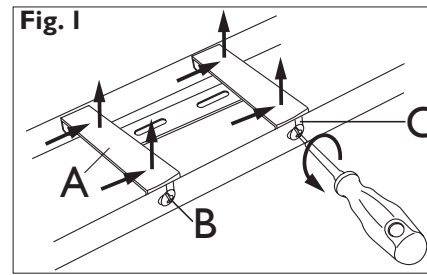

Step 2

See Fig. 1. Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B).

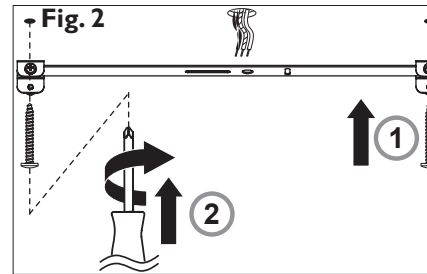


Step 3

See Fig. 2. Attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.

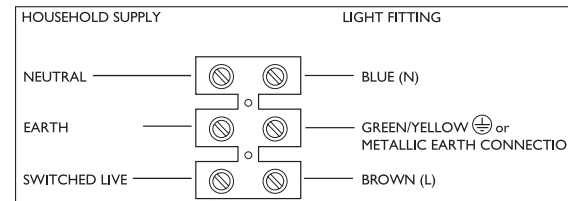


Check that

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

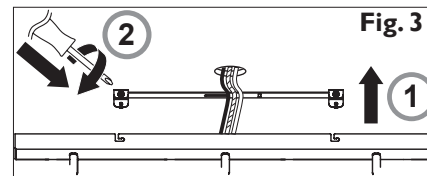

Step 6

See Fig. 3. Fix the ceiling cup to the bracket. This product has "L" shaped fixing slots to allow easy fixing to the ceiling strap. See Fig. 1. Locate the "L" slots (C) around the small screws (B) on the ceiling strap (A). Slide the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

Step 8

Fit the recommended bulbs as per the details overleaf. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.