

Product information

- Indoor/bathroom use only
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.



Specification

Max power: 3 x 4.6W
Supplied bulbs:
3 x 4.6W LED GU10 bulbs
for maximum brightness.
Lower wattages are also suitable.
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 44
Weight: 1.01kg

Fitting a GU10 bulb

Fit bulb pins into round holes.
Then push and twist clockwise
to lock.

Ensure the bulb fitting tool is
clean prior to fitting the bulb.
Any traces of dust can
be wiped away with a
damp cloth.




Replaceable (LED only) light
source by an end-user

5-year guarantee

At John Lewis & Partners we test every light to high quality standards.
That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis plc
SW1V 2QQ
johnlewis.com

Made in China




Please retain these instructions for future reference.

21/06/2024



ANDORRA 3LT SPOTLIGHT USER GUIDE

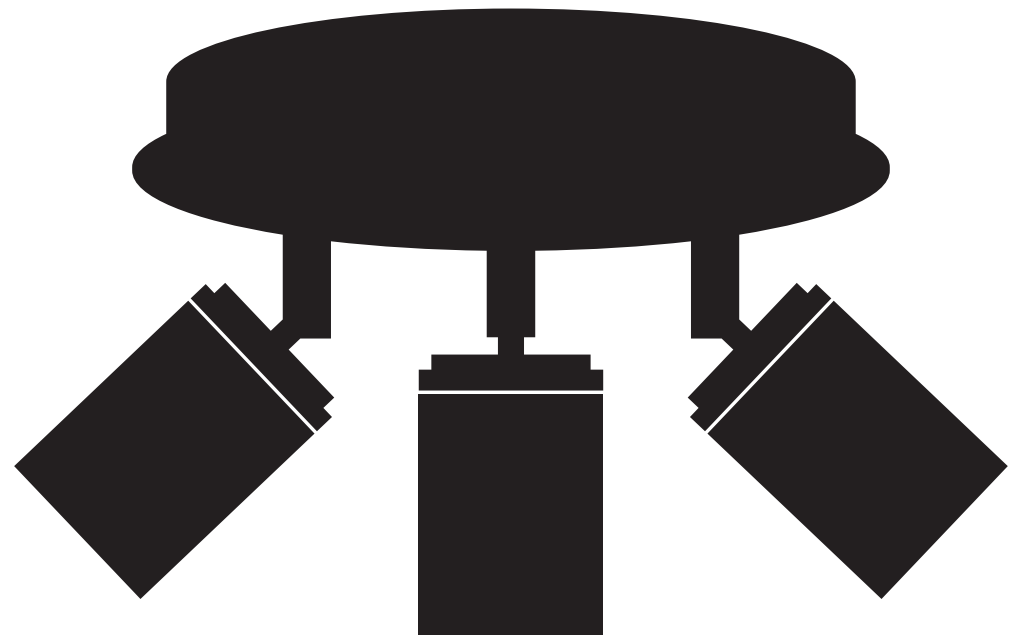


Product Code:
10501403

Thank you for purchasing this Andorra 3lt spotlight. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class 1 product and must be earthed. Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is rated IP44. This product is suitable for indoor use only. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). Ensure the correct fixings are used for the installation surface. For your safety, always switch off the supply before changing lightbulbs, cleaning or adjusting the fitting.

0.5m SPOTLIGHTS GIVE A CONCENTRATED BEAM OF LIGHT AND MUST NOT BE POSITIONED ANY CLOSER THAN 0.5M (50CM) TO THE ILLUMINATED SURFACE.

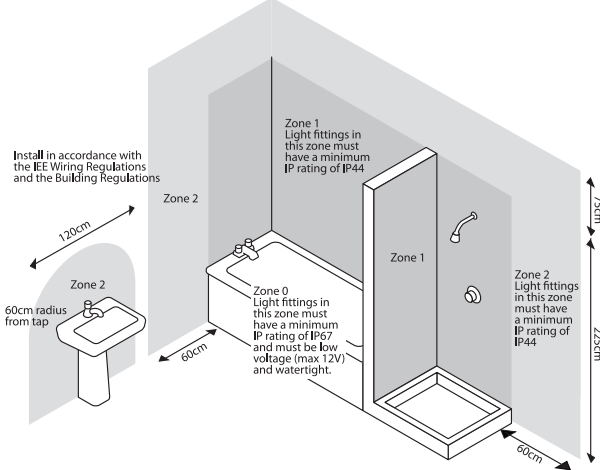

This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 2 and outside Zones of a bathroom. If fitting in a bathroom a 30mA RCD must be fitted in accordance with IEE wiring regulations.

Parts list


Parts list	Image	Qty	Parts list	Image	Qty
Light Fitting		1	LED Bulbs		3
Screws		2	Shades		3
Wall Plugs		2			

Assembly

Refer to assembly overleaf. Carefully unpack the carton, making sure all the parts are present before assembly.


Step 1

Before removing the existing fitting, carefully note the position of each set of wires.



Step 2

Remove the fixing bracket (A) from the ceiling cover by loosening the side screws (B). See Figure 1.




Step 3

Attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes. See Figure 2.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.

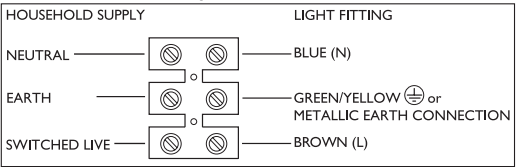


Check that

You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block.

Step 5

This product has “L” shaped fixing slots to allow easy fixing to the strap. Locate the “L” slots (C) around the small screws (B) on the ceiling strap (A) (see Figure.1). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

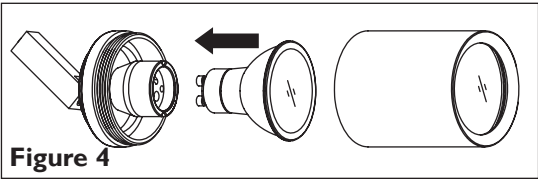

Step 6

Fit the bulbs and shades (as detailed overleaf). Simply screw the shades over the bulbs onto the lampholders. See Figure 4.

Step 7

Replace fuse or circuit breaker and switch on. Your light is now ready for use.