


Product information	<ul style="list-style-type: none"> Indoor use only Dimmable - When used with dimmable bulbs Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish
---------------------	--

Aftercare and Troubleshooting	<p>You've switched on the light, but it's not working:</p> <ol style="list-style-type: none"> Check your power supply is switched on Turn off the light and check that the bulb is inserted correctly Check the bulb is still in working order <p>If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.</p>
-------------------------------	---

Specification	<p>Max power: 1 x 15W</p> <p>Recommended bulb:</p> <p>15W LED E27 GLS bulb for maximum brightness.</p> <p>Lower wattages are also suitable.</p> <p>Rated input: 220 –240V, 50Hz</p> <p>Bulbs not included</p> <p>IP rating: 20</p> <p>Weight: 0.36kg</p>
---------------	--


5-year guarantee	<p>At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.</p>
------------------	--

Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.</p>
-----------	---



BALDWIN PENDANT CORD

USER GUIDE

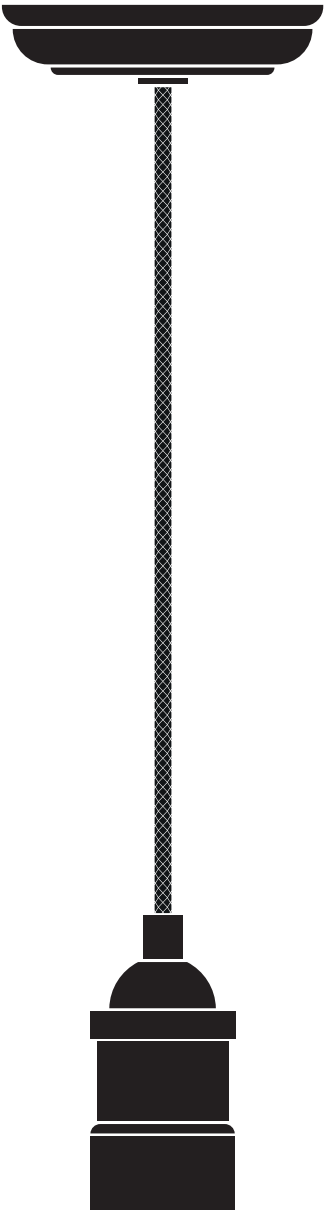








Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings


This is a Class II product and must NOT be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. Dispose of used bulbs carefully. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning, or adjusting the light's position. When using with a shade of a different wattage rating, always follow the lower rating.

Parts list

Description	Image	Quantity
Light fitting		x 1
Wall plugs		x 3
Screws		x 3
Hex screws		x 2
Hex keys		x 2
Disk		x 1
Hook		x 1

Note:

During transit, the cable can become kinked. It may be necessary to straighten the cable to allow the product to hang level. Manipulate the kinked cable between thumb and fingers to straighten.



Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.


Step 2

Remove the fixing bracket (A) by undoing the two side screws (B) from the ceiling cover.

Using the fixing bracket as a template, mark the position of the mounting holes. Drill holes and fit supplied wall plugs. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes. Attach the fixing bracket to the ceiling using the screws provided (C).


Step 3

The hanging height of this product can be adjusted. Work out the required height and feed the cable through the cord grip (D) until the desired height is achieved. It maybe necessary to cut, shorten and reconnect the cable. If you are unsure how to do this, contact a qualified electrician.

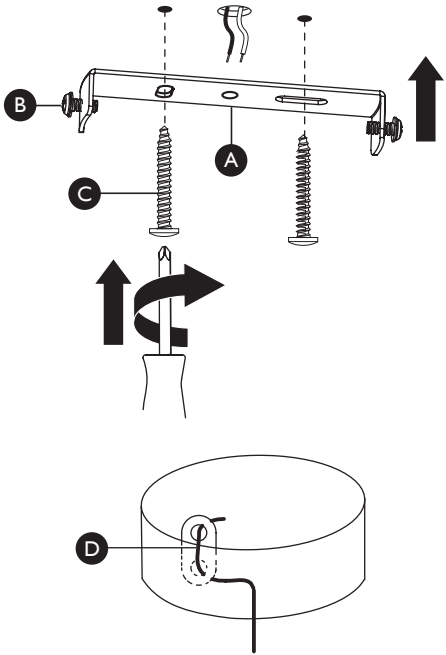

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out the connection block.

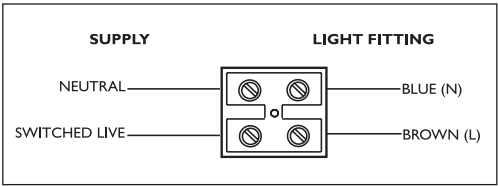

Step 5

Re attach the product to the fixing bracket using side screws (B), by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

Step 6

This product is supplied with an optional hook to attach the cable to the ceiling if desired. Attach the disk (E) to the ceiling using the supplied fixings (F). Take care not to damage any concealed wiring or pipes. Place the cable through the hook (G). Then place the hook over the disk (E) and secure in place with the supplied hex screws (H) using the hex key (I). Tighten the cord grip (J) underneath to secure the cable.

Step 7

Fit the recommended bulb. Your light is now ready to use.

