



DOUBLE HOOP INTEGRATED LED SEMI FLUSH USER GUIDE

Caring for your product

Indoor use only
Non-Dimmable
Replace bulbs from John Lewis or established brand of the same type and compatibility
Recommended the fitting should be cleaned with a soft dry cloth.

Aftercare and Troubleshooting

Why is the light not working when switched on?
Check your power supply is switched on

If you experience any unresolvable technical issues with the product, contact your nearest John Lewis & Partners shop or John Lewis & Partners Technical Support on 03301 230106.


Specification

Integrated Led energy efficient LED Module
Rated power: 24W Max.
LED light source included, NON REPLACEABLE
Voltage: 220 –240V, 50Hz
IP rating: 20
Weight: 0.98kg

5 year guarantee

At John Lewis & Partners we test every light to high quality standards so we are able to offer you a 5 year guarantee.

Recycling


This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.



John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com
Made in China



Please retain these instructions for future reference.

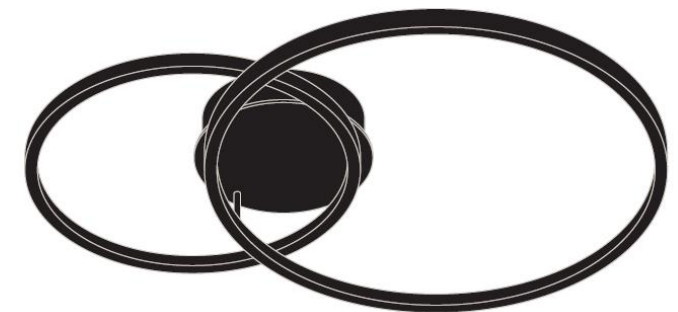

Introduction

Thank you for purchasing this Double Hoop Integrated LED Semi Flush. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings



This product is Class II.







This fitting should be fitted in accordance with IEE Regulations and the Building Regulations. If in any doubt, or where required by law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your Local Authority. To prevent electric shock, switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge. If you are in any doubt, please consult a qualified electrician. If replacing an existing fitting, make a note of the connections.

The flexible cable of this product is not replaceable. If damaged, the product shall be disposed of.

It is the installer's responsibility to ensure that the fixings and wall plugs used are suitable for the surface you are fixing your product on

CAUTION! The LED Module and surrounding parts can become hot during use.

Parts list

Description	Image	Quantity
A WALL PLUG		x 2
B FIXING SCREW		x 2
C GRUB SCREW		x 2
D FIXING BRACKET		x 1
E CONNECTOR BLOCK		x 1
F LAMP BODY		x 1

Integrated LED


LED Lifespan: Up to 25,000 hours
Colour Temperature: Bright White
24Watt / 3100 Lumens LED Non replaceable
[This product contains a light source of energy efficiency class D](#)



Non-replaceable light source

Product assembly

1

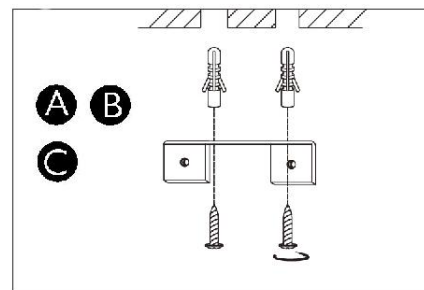


Ensure the mains electricity supply switched off at the fuse board.

Step 1

If removing an existing fitting, note down all wiring connections.


Ensure that the bracket (supplied) is fixed to a wooden joist in the ceiling using screws (supplied) or use a suitable fixing to the ceiling which will support the weight of the fitting. The weight of the fitting must be supported by the suspension bracket and not the flexible cable.

2

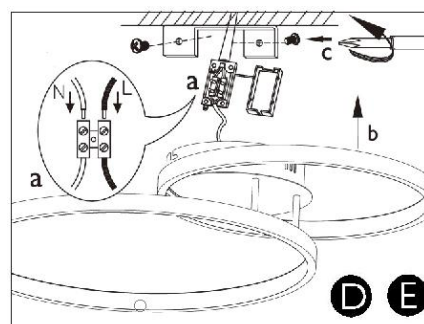

Step 2

Connect cables to terminals as shown below.




Check all wires are tight in the terminal block and no loose strands are left out.

Cover with insulating tape (not included).

Step 3

Push up ceiling cup and secure with metal grub screws.

3

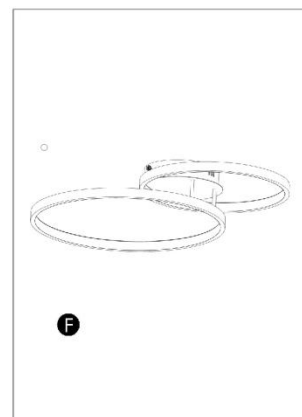

Step 4

Switch on the electricity supply at the fuse board.