

Product information

- Outdoor use only
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish
- Do not use abrasive materials as these will damage the finish. Take care when handling glass parts to avoid damage or injury
- Do not use this product if the shade is cracked or damaged.
Do not use the product without the shade attached

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.


Specification

Max power: 1 x 15W LED E27 GLS
Rated input: 220 –240V, 50Hz
Bulb not included
IP rating: 44
Weight: 0.94kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.


John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

UK
CA



IP44




02/03/2023

Please retain these instructions for future reference.



CRAFT OUTDOOR WALL LIGHT USER GUIDE

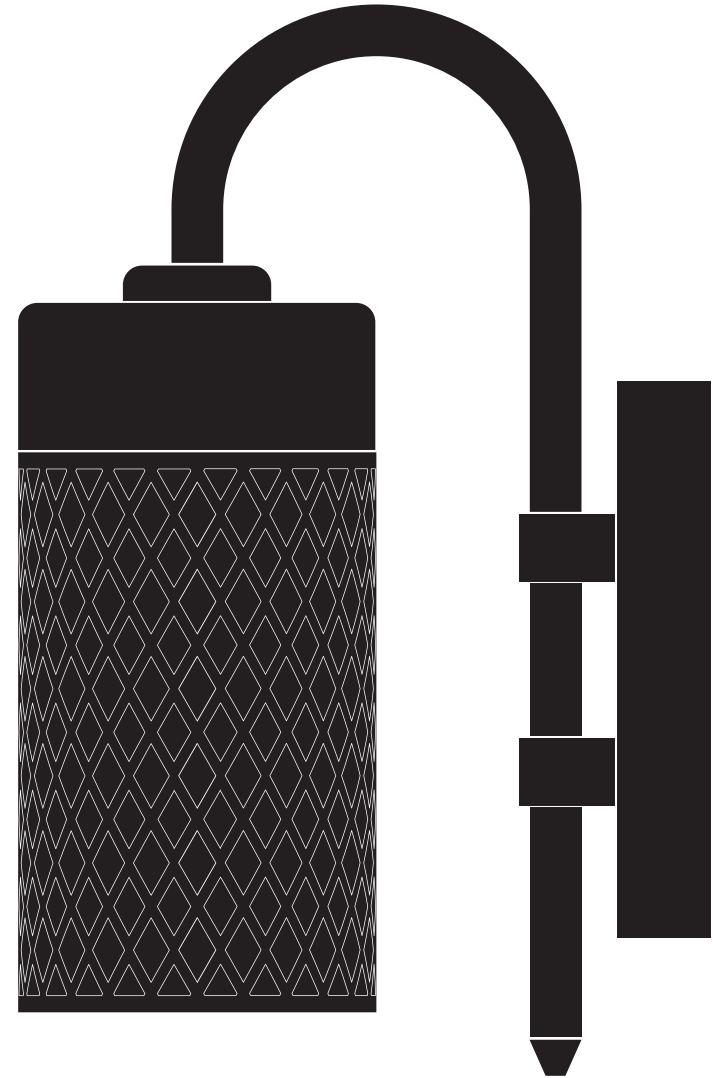

Product Code:
70271704





Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class 1 product and must be earthed. Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. This product is rated IP44 and is suitable for outdoor use. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling lightbulbs to avoid injury in case of breakage.

Parts list

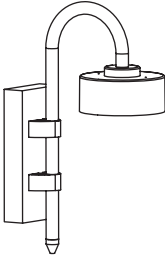Description	Image	Quantity
Light fitting		x 1
Shade		x 1
Wall plugs		x 4
Screws		x 4

Product assembly

Step 1


Refer to assembly diagrams right. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.

Step 2

Detach wall back from the product by removing the finials (A). Keep safe for refitting later. Using the wall back as a template, mark the position of the fixing holes. Drill the holes. Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick or cavity walls. Make sure the wall back is correctly oriented with the drain hole at the base.

Step 3


Carefully pierce a small hole in the rubber grommet to allow the cable to pass through. Feed the incoming mains supply through the grommet entry hole. Secure the wall back to the wall using the screws and fixings supplied (B).

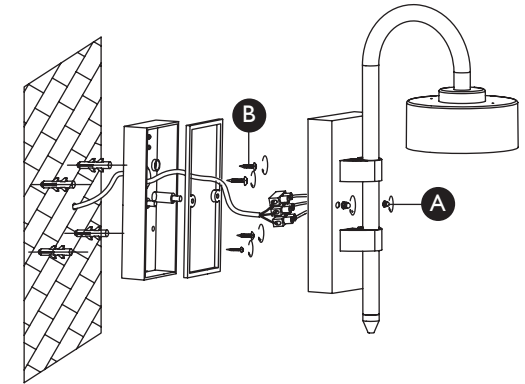

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

Make sure no loose strands have been left out of the connection block and the lid is refitted securely to terminal box.

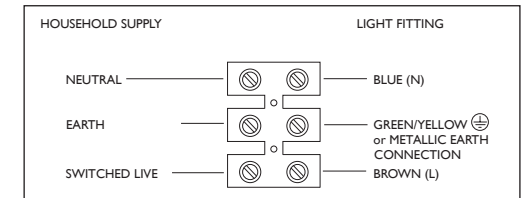

Step 5

Refit the product to the wall back with the finials (A) removed earlier. Tighten the finials to secure. Take care not to trap any wiring.

Step 6

Fit the recommended bulb (C).

Step 7

Fit the shade (D) by screwing it onto the lampholder. Ensure the shade is fully fitted to maintain ingress protection.

Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

