

## Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish

## Aftercare and Troubleshooting

### You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.


## Specification

Max power: 6 x 10W  
Recommended bulb:  
10W LED E27 GLS bulb for maximum brightness.  
Lower wattages are also suitable.  
Rated input: 220 –240V, 50Hz  
Bulbs not included  
IP rating: 20  
Weight: 1.46kg

## 2-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 2-year guarantee.


## Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

# JOHN LEWIS

& PARTNERS

## SWAG MULTICOLOURED 6 PENDANT LIGHT USER GUIDE

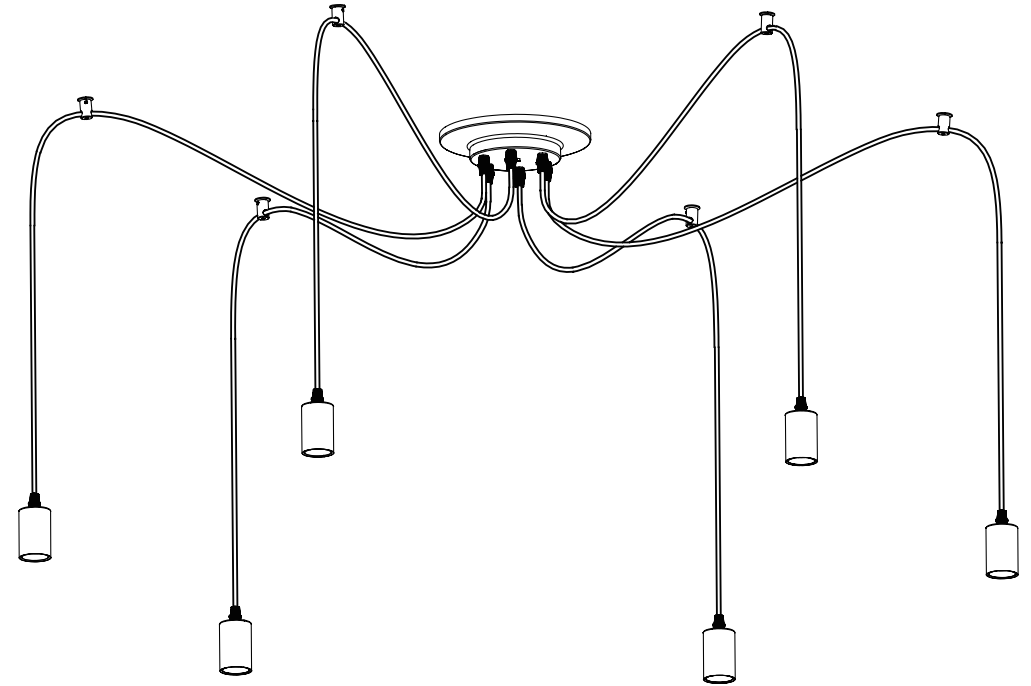

John Lewis plc  
SW1V 2QQ  
[johnlewis.com](http://johnlewis.com)

Made in China



13/05/2024

Please retain these instructions for future reference.



Product Code:  
41351002



## Getting started


Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

## Warnings

This is a Class 1 product and must be earthed. Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. Do not install lampholders closer than 10cm to the ceiling to avoid overheating. When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully. This product is suitable with a dimmer switch when used with dimmable bulbs. This product is suitable for indoor use only on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). Ensure bulbs and loops of cable are kept well away from bunk beds and securely fixed to the ceiling with appropriate fixings. **IMPORTANT:** Children can become entangled in loose cables. Ensure excessive loops of cable are secured against the ceiling and no lower than 30cm. When installed light must not be in reach of child. This is not a toy.

## Parts list

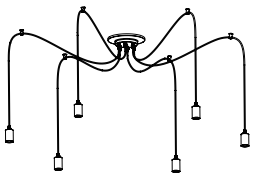Description	Image	Quantity
Light fitting		x 1
Hex key		x 1



### Note:

During transit, the cables can become kinked. It may be necessary to straighten the cables to allow the shades to hang level. Manipulate the kinked cables between thumb and fingers to straighten.

## Product assembly

### Step 1

Refer to assembly diagrams right. Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.


### Step 2

Remove the fixing bracket (A) by undoing the finial (B) from under the ceiling cover.

### Step 3

Attach the fixing bracket to the ceiling using the appropriate wall plugs (C) and screws (D).

Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

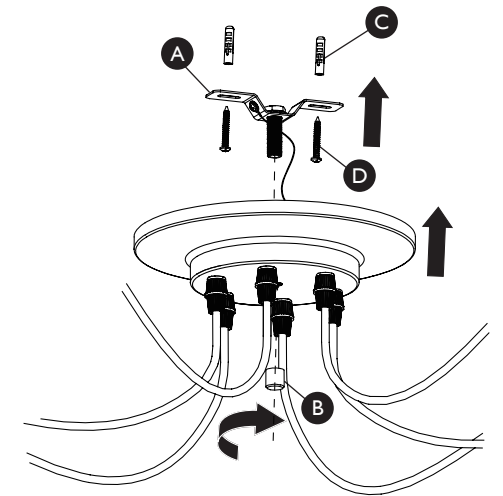

### Step 4


Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way.

Check that:

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

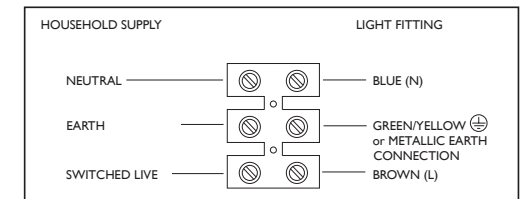

### Step 5

Re attach the product to the fixing bracket (A), by locating the finial (B) in the bracket into the hole in the ceiling cover and tightening to secure. Take care not to trap any wiring.

### Step 6

Decide on the layout of the cables and attach the disks (E) to the ceiling using the appropriate fixings (F). Take care not to damage any concealed wiring or pipes.

Re attach the product to the disks and secure in place with the supplied hex screws (G) using the hex key (H). Tighten the cord grips (I) underneath to secure the cables.

### Step 7

Fit the recommended bulbs (J).

Your light is now ready to use.

