

Product information

- Indoor use only
- Dimmable - When used with dimmable bulbs
- Replacement bulbs should be the same type and rating, available from John Lewis Partners or other established brands
- Clean the fitting with a soft dry cloth. Do not use abrasive chemical cleaners as this will damage the finish
- Glass parts - Clean with a soft dry cloth only. Do not use abrasive materials as these will damage the finish. Take care when handling glass parts to avoid damage or injury

Aftercare and Troubleshooting

You've switched on the light, but it's not working:

1. Check your power supply is switched on
2. Turn off the light and check that the bulb is inserted correctly
3. Check the bulb is still in working order

If there are technical issues with this product that you can't solve, please contact your nearest John Lewis & Partners shop or call Technical Support on 03301 230106.


Specification

Max power: 3 x 6W
Recommended bulb:
3 x 6W E14 Candle LED bulb
Rated input: 220 –240V, 50Hz
Bulbs not included
IP rating: 20
Weight: 4.8kg

5-year guarantee

At John Lewis & Partners we test every light to high quality standards. That means we can offer you a 5-year guarantee.

Recycling

This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China




30/03/2023

Please retain these instructions for future reference.



VISCOUNT 3 LIGHT CEILING PENDANT USER GUIDE

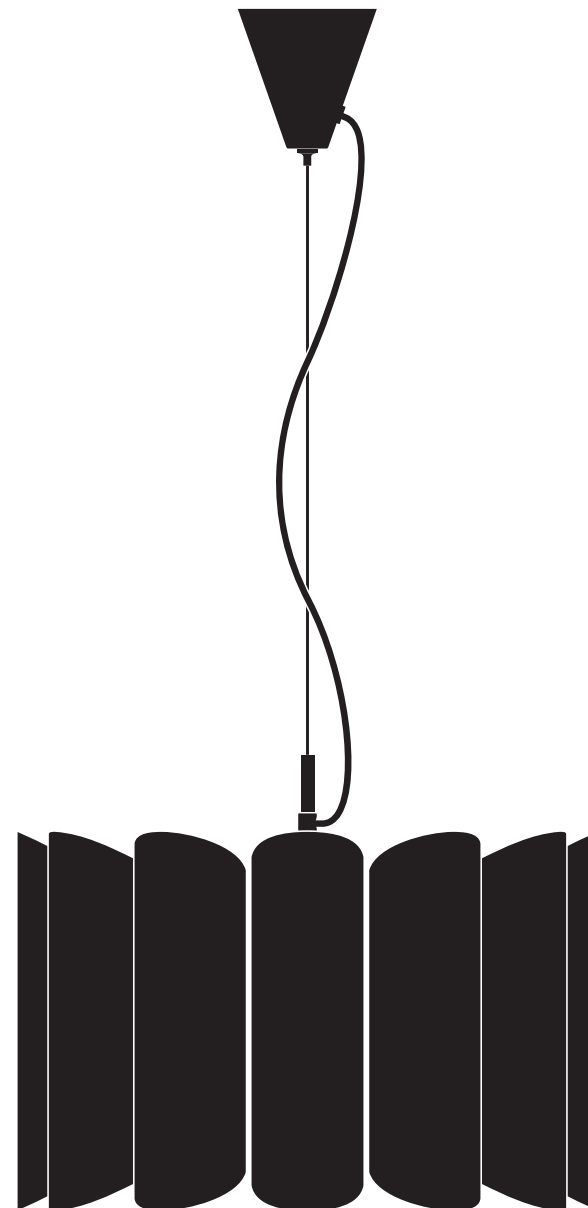

Product Code:
70140707





Getting started

Thank you for purchasing this John Lewis & Partners product. For your safety, and to make sure everything is working properly, please read the instructions carefully before use.

Warnings

This is a Class 1 product and must be earthed. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician. This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. Dispose of used bulbs carefully. This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles). For your safety, always switch off the supply and allow the fitting to cool down before changing lightbulbs, cleaning or removing shades.

Parts list

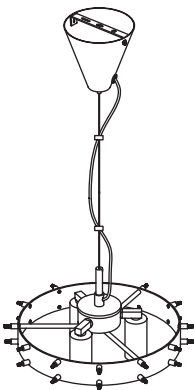Description	Image	Quantity
Light fitting and x 24 finials (fitted)		x 1
Shades		x 12
Wall plugs		x 2
Screws		x 2


Product assembly

Step 1

Carefully unpack the carton, making sure all the parts are present before assembly. Before removing the existing fitting, carefully note the position of each set of wires.


Step 2

Remove the fixing bracket (A) from the ceiling cover by removing the side screws (B). Attach to the ceiling using the screws provided (C). Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

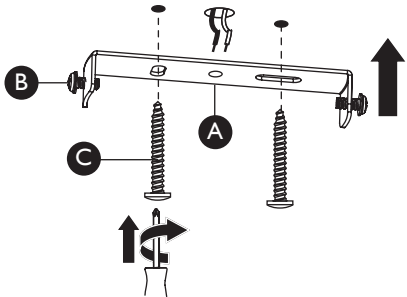

Step 3


This will be easier to complete before attaching the product to the ceiling. The length of drop of this product can be altered by pulling the cable through the cord grip (D) and by adjusting the length of the steel cable.



Push the steel cable through the grip (E) until the desired height is achieved. To release the grip and lengthen the cable, push up the button in the grip. Always ensure that the weight of the product is supported by the steel cable and not the electrical flex.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way. Check that: You have correctly identified the house wires. The connections are tight. No loose strands have been left out of the connection block. The lid is fitted back onto the terminal block case.

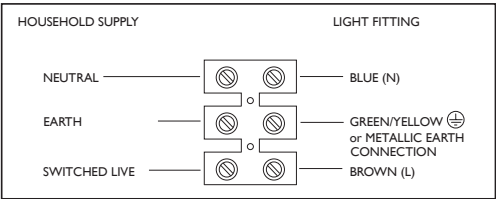

Step 5

Attach the product to the fixing bracket using side screws (B), by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

Step 6

To attach the glass shades (F), simply locate the 2 holes in the shades through the threaded pillars on the light fitting. Secure in place with the finials (G) but be careful not to overtighten. This maybe easier to do with the help of an assistant.

Step 7

Fit the recommended bulbs (H) as per the details overleaf. Your light is now ready for use.

